

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1554.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	52.2V x 80.2H
	At 50% of Imax	36.5V x 67.1H
	At 90% of Imax	23.9V x 25.8H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	972.5 lumens per klm.
	To 50% of Imax	787.4 lumens per klm.
	To 90% of Imax	209.2 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XT
Test Date:2025-11-20

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.6V I:0.0891A P:7.372W PF:0.3736 Lamp Flux:373.048x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: seity	SUR.:	Shielding Angle:

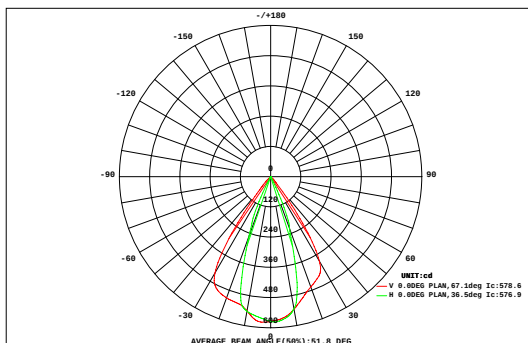

DATA OF LAMP		Eff:50.60lm/W	
MODEL693221D-4000K-50-6W		Imax(cd)	579.8
NOMINAL POWER(W)	6	AVAILABILITY(%)	97.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	362.6
NOMINAL FLUX(lm)	373.048	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	373.0
TEST VOLTAGE(V)	220	θ @50%(H,V)	67,37DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
40	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.12	0.00
32	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.06	0.06	0.06	0.06	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.43	0.00
24	0.00	0.00	0.00	0.01	0.04	0.24	0.60	0.63	0.62	0.61	0.60	0.57	0.29	0.05	0.01	0.00	0.00	0.00	4.28	2.15
16	0.00	0.00	0.00	0.07	0.48	2.16	3.55	4.09	4.43	4.39	4.02	3.37	2.23	0.59	0.06	0.01	0.00	0.00	29.5	28.6
8	0.00	0.00	0.01	0.23	1.98	5.89	7.73	8.49	9.33	9.17	8.30	7.04	5.48	2.10	0.19	0.01	0.00	0.00	66.0	65.2
0	0.00	0.00	0.01	0.40	3.11	7.80	9.26	10.0	11.0	10.9	9.92	8.50	6.98	2.79	0.30	0.02	0.00	0.00	81.1	80.4
-8	0.00	0.00	0.01	0.41	3.00	7.69	9.20	9.94	10.9	10.8	9.74	8.42	6.92	2.70	0.31	0.02	0.00	0.00	80.0	79.2
-16	0.00	0.00	0.01	0.24	1.80	5.99	8.19	9.09	10.0	9.90	8.97	7.61	5.84	1.97	0.24	0.02	0.00	0.00	69.9	69.1
-24	0.00	0.00	0.00	0.07	0.44	2.45	4.09	4.76	5.25	5.29	4.88	4.16	2.88	0.58	0.10	0.01	0.00	0.00	35.0	34.0
-32	0.00	0.00	0.00	0.01	0.04	0.28	0.74	0.82	0.90	0.94	0.93	0.91	0.42	0.06	0.02	0.00	0.00	0.00	6.09	3.92
-40	0.00	0.00	0.00	0.00	0.01	0.04	0.06	0.07	0.07	0.07	0.07	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.53	0.00
-48	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.13	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.01	0.02	0.06	1.45	10.9	32.6	43.5	48.0	52.7	52.1	47.5	40.7	31.1	10.9	1.23	0.09	0.02	0.01	373	---
Φ a	0.00	0.00	0.00	0.07	9.89	31.8	42.7	47.4	52.1	51.5	46.9	40.0	30.4	9.84	0.00	0.00	0.00	0.00	---	363

one-half-peak spread: U:21.0,D:15.6 , L:31.2,R:31.2 IEMA Beam Type: Type 5 x 4 (H x V)

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XT
 Test Date:2025-11-20

V(B) Range:-90 - 90DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:6.350m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:221.6V I:0.0891A P:7.372W PF:0.3736 Lamp Flux:373.048x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: seity	SUR.:	Shielding Angle:

Conical surface Flux(90deg):

371.81 lm

%lum = 99.7%


%lamp = 99.7%

Conical surface Flux(120deg):

373.02 lm

%lum = 100.0%

%lamp = 100.0%

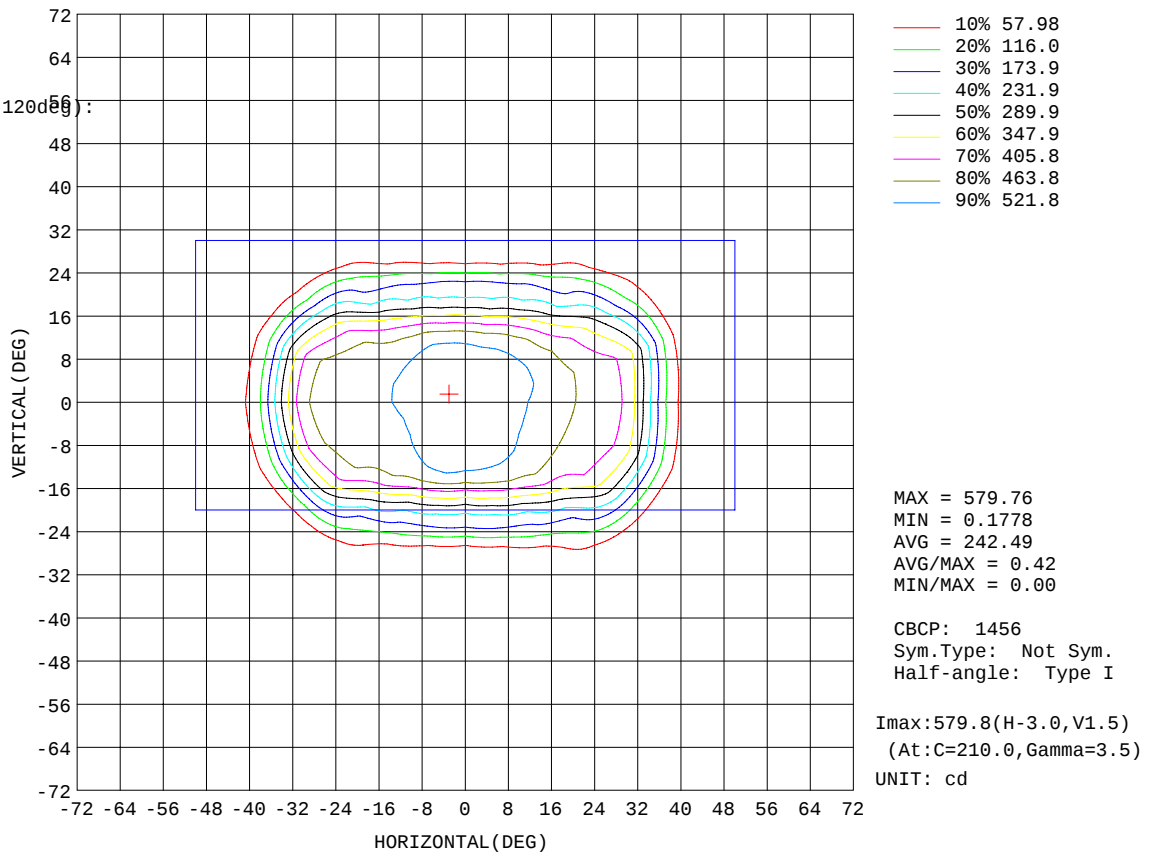H(β) Range:-90 - 90DEGH(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:XT

Test Date:2025-11-20

V(B) Range:-90 - 90DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293


Humidity:65.0%

Test Distance:6.350m [K=1.0000]

Remarks:

ISOLUX DIAGRAM


Test:U:221.6V I:0.0891A P:7.372W PF:0.3736 Lamp Flux:373.048x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: seity	SUR.:	Shielding Angle:

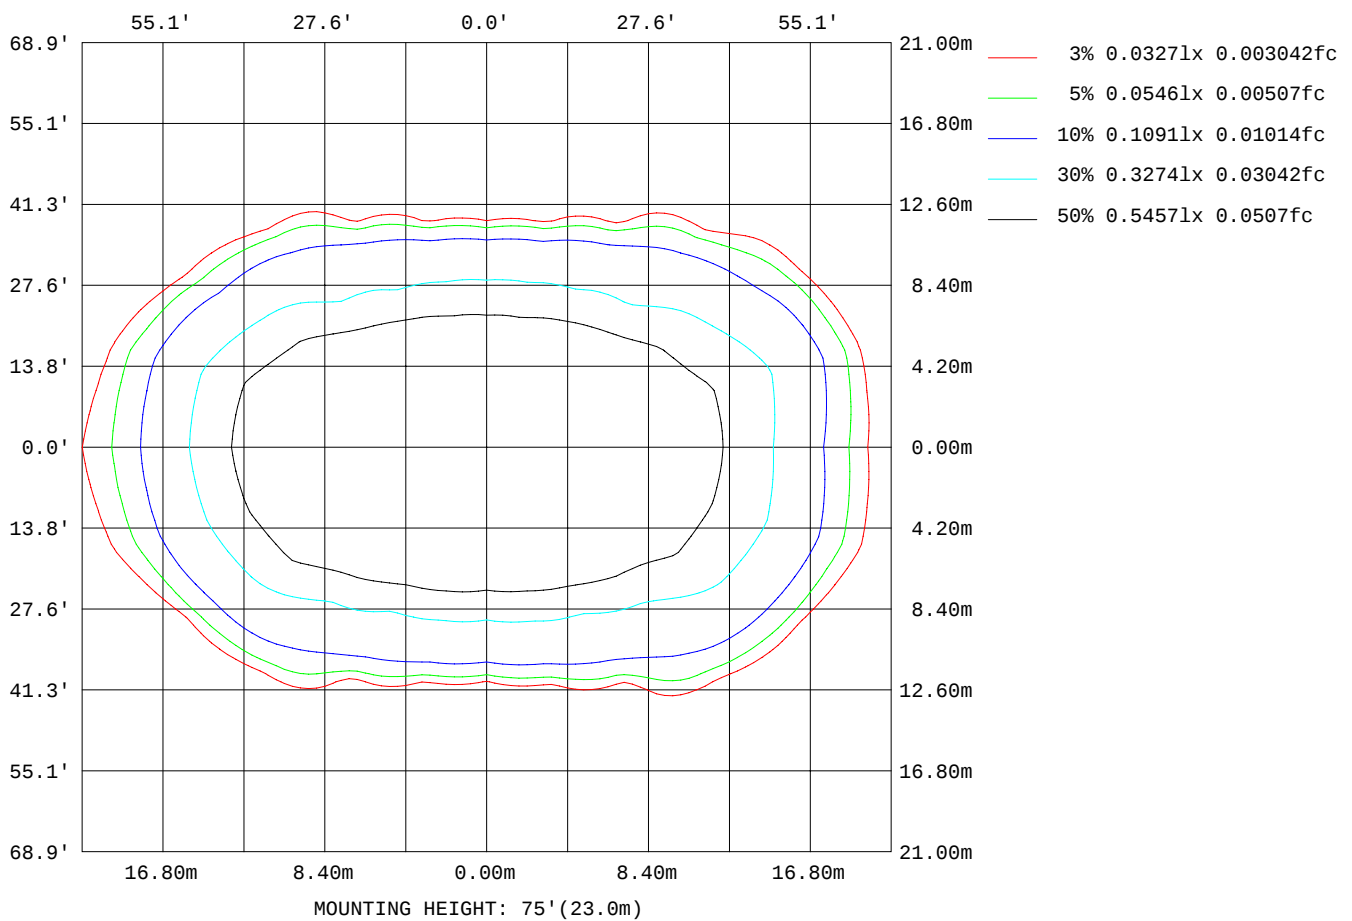

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XT
Test Date:2025-11-20

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

Planar Illuminance Curve

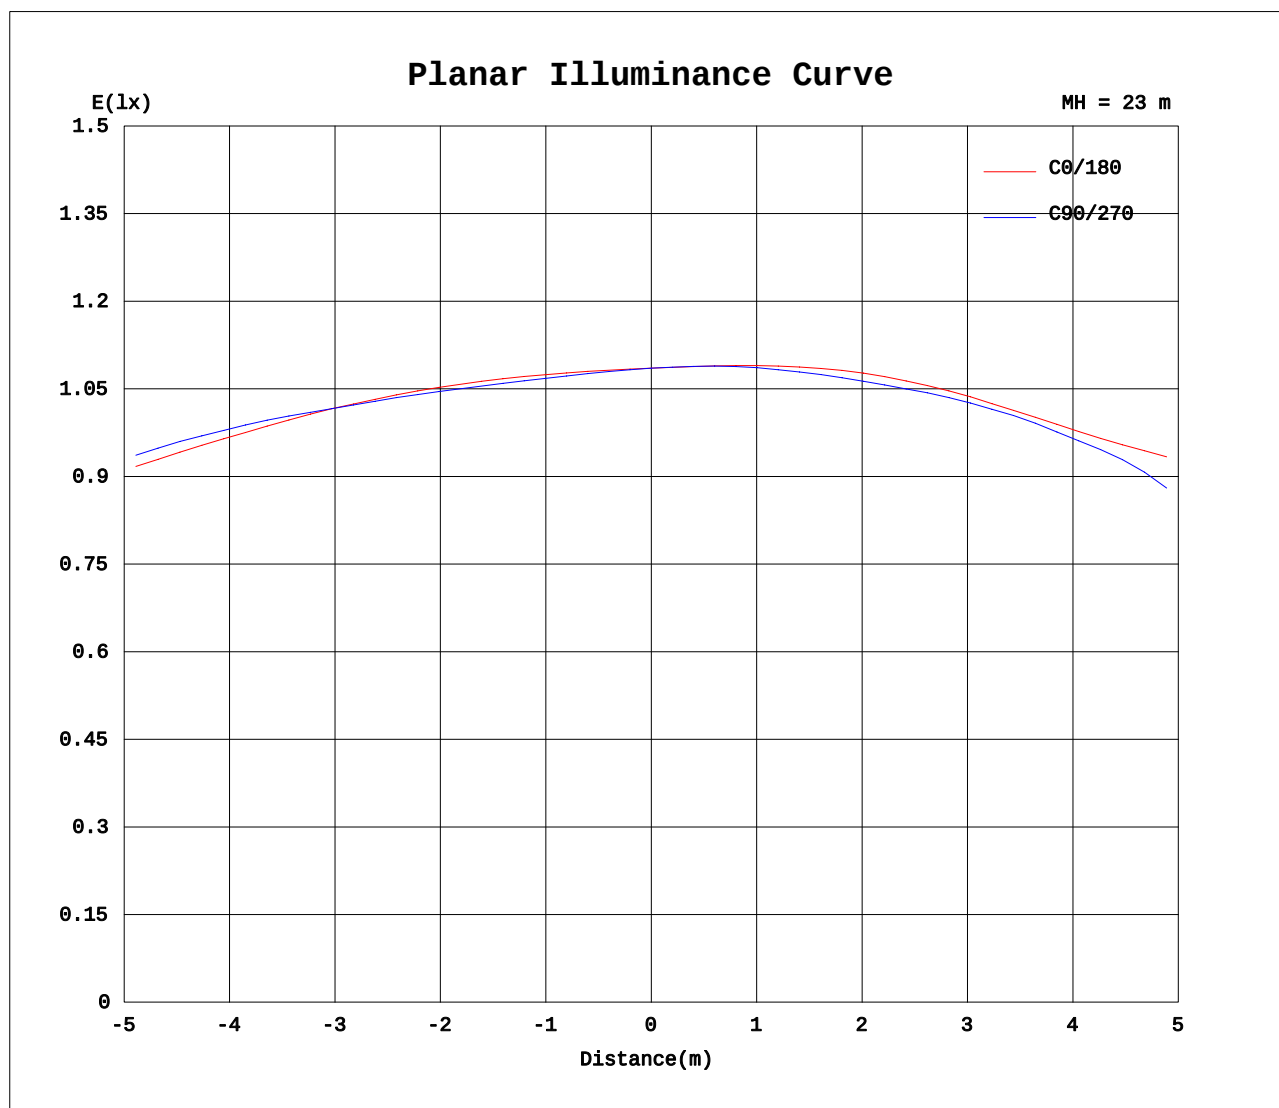


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XT
Test Date:2025-11-20

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.6V I:0.0891A P:7.372W PF:0.3736 Lamp Flux:373.048x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: seity	SUR.:	Shielding Angle:

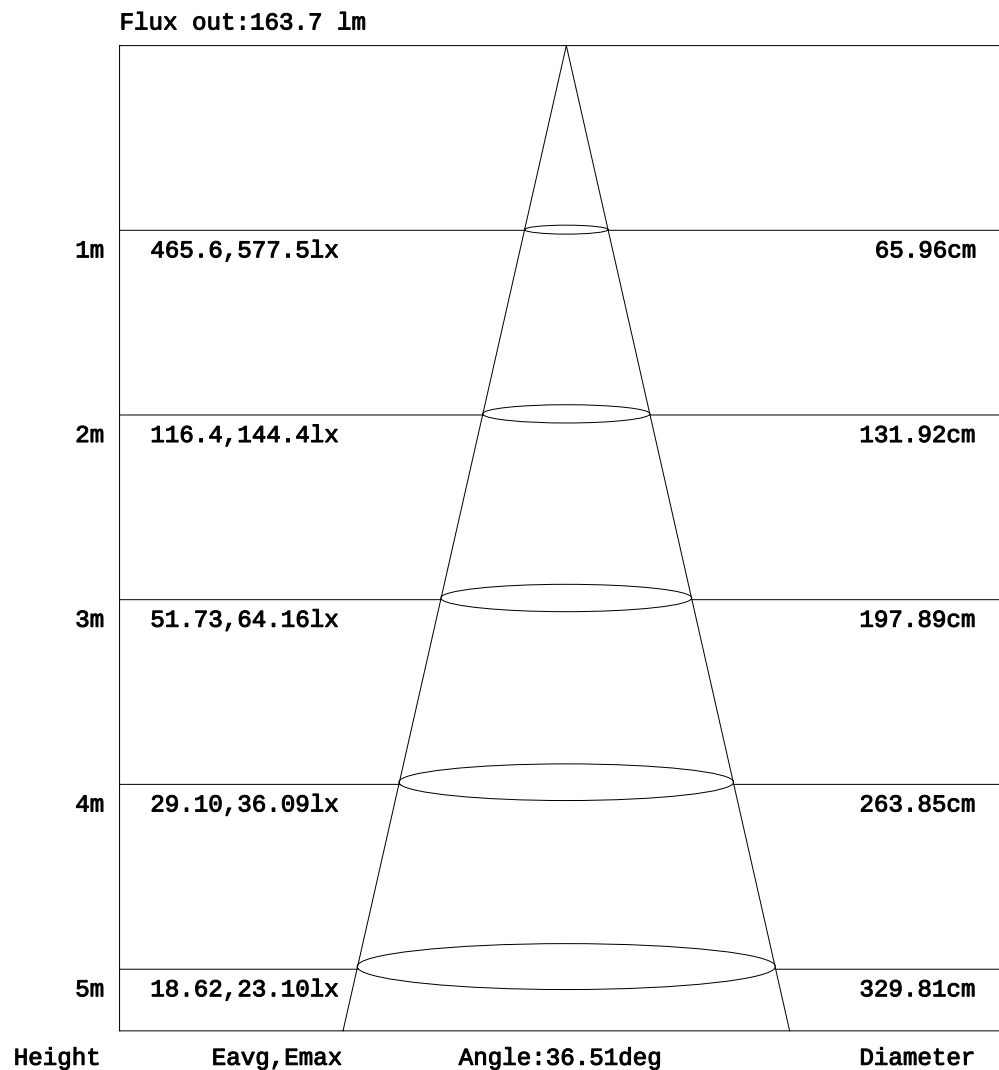

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XT
Test Date:2025-11-20

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

Table--1

LUMINOUS DISTRIBUTION INTENSITY DATA

UNIT: cd

H(°) \ V(°)	-90	-75	-60	-45	-30	-20	-15	-10	-9	-8	-7	-6	-5	-4	-3
-90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60		0.00	0.00	0.00	0.01	0.02	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.04
-45		0.00	0.02	0.10	0.32	0.61	0.74	0.77	0.78	0.80	0.80	0.81	0.82	0.82	0.82
-30		0.02	0.13	0.39	4.45	17.22	8.66	11.27	11.04	9.72	9.09	9.23	9.41	9.51	9.50
-20		0.03	0.20	1.26	91.58	211.5	240.3	242.2	248.8	253.1	255.6	256.4	256.7	259.1	259.8
-15		0.03	0.22	5.79	226.2	392.2	417.6	433.8	440.8	449.2	455.4	460.7	465.1	468.5	469.3
-10		0.04	0.25	14.89	350.1	480.5	492	511.2	518.9	526.4	533.3	539.8	544.3	546.6	548.1
-9		0.04	0.25	16.46	370.2	485.9	497.2	516.3	523.1	530.5	537.6	544.4	549.5	551.3	552.5
-8		0.04	0.25	17.99	383.3	490.7	501.1	519.6	526.6	533.9	541.2	547.5	552.3	554.8	555.5
-7		0.04	0.26	19.35	394.7	495.1	504.5	521.9	529.1	536.6	544.3	550.5	555.1	558.4	558.8
-6		0.04	0.26	20.57	404.9	499.4	507.5	523.2	530.8	538.7	546.5	553.7	558.2	561.1	562.1
-5		0.04	0.26	21.73	413.5	502.4	510.3	525.7	532.3	539.9	548	555.3	561.2	563.8	565
-4		0.04	0.26	22.80	421.1	504.7	512.7	527.8	534.5	541.9	549.4	556.6	562.5	566.4	567.2
-3		0.04	0.27	23.79	427.7	506.7	514.4	529	536.1	543.9	551.8	558.7	564.3	568.3	570
-2.5		0.04	0.27	24.24	430.7	507.7	515.2	530.2	536.6	544.7	552.9	560.3	565.8	569.4	571.3
-2		0.05	0.27	24.67	433.4	508.6	516	532.6	539.3	546.2	553.9	561.6	567.3	571	572.7
-1.5		0.05	0.27	25.07	436	509.5	516.8	534.9	542.2	549.5	557	563.3	568.8	572.7	574.4
-1		0.05	0.27	25.45	438.3	510.4	517.6	537.1	544.9	552.6	560.4	566.5	571.2	574.4	576.1
-0.5		0.05	0.27	25.79	440.5	511.2	518.3	539.2	547.5	555.6	563.5	569.4	573.9	576.4	577.5
0	0.00	0.05	0.27	26.10	442.4	512	519	541.1	549.8	558.3	566.3	572.1	576.4	578.3	578.6
0.5		0.05	0.27	25.71	441.4	511.8	519	541.3	550	558.4	566.4	572.3	576.6	578.7	579.1
1		0.05	0.27	25.28	440.3	511.5	518.9	541.2	549.9	558.3	566.3	572.3	576.7	579	579.6
1.5		0.05	0.27	24.83	438.9	511.2	518.8	541	549.6	558	565.9	572.1	576.6	579	579.8
2		0.05	0.27	24.34	437.3	510.9	518.7	540.5	549	557.4	565.4	571.7	576.3	578.9	579.6
2.5		0.04	0.26	23.83	435.6	510.6	518.6	539.9	548.3	556.8	565	571.2	575.8	578.4	578.9
3		0.04	0.26	23.30	433.7	510.2	518.4	539.3	547.9	556.3	564.3	570.6	574.9	577.4	578
4		0.04	0.26	22.16	429.3	509.4	517.9	537.9	546.2	554.8	562.3	568.2	572	574.5	575.6
5		0.04	0.25	20.93	424.2	508.4	514.4	535.8	543.6	551.9	558.8	564.6	568.8	571.1	572.4
6		0.04	0.25	19.63	418.1	504.9	510.2	532.4	539.6	547.2	554.6	560.4	564.6	567.5	568.3
7		0.04	0.24	18.26	410.8	497.6	505.6	527	534.5	541.6	549	555	559.4	562.6	562.8
8		0.04	0.24	16.79	402.7	489.4	500.2	520.1	528	535.1	542	548.6	553.5	555.5	555.7
9		0.04	0.23	15.22	391.5	480.3	493.6	511.7	519.1	527.3	534.1	540.3	545.4	546.4	546.5
10		0.04	0.23	13.64	365.5	470.1	480	501.5	508.5	516.4	524.2	530.8	533.7	534.9	535.2
15		0.03	0.19	6.13	221	349.7	355.9	379	383.1	387.7	392	394.2	394	391.6	395.3
20		0.03	0.16	1.33	82.82	190	205.6	211.8	216.6	220.4	222.2	221.4	219.7	221.5	222.5
30		0.02	0.09	0.29	3.92	11.78	7.57	8.78	8.51	7.68	7.34	7.46	7.55	7.60	7.59
45		0.00	0.02	0.03	0.28	0.64	0.67	0.76	0.78	0.79	0.81	0.81	0.82	0.82	0.82
60		0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03
75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:XT

Test Date:2025-11-20

V(B) Range:-90 - 90DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293

Humidity:65.0%

Test Distance:6.350m [K=1.0000]

Remarks:

Table--2

LUMINOUS DISTRIBUTION INTENSITY DATA

UNIT: cd

H(°) \ V(°)	-2.5	-2	-1.5	-1	-0.5	0	0.5	1	1.5	2	2.5	3	4	5	6
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
-45	0.82	0.82	0.82	0.82	0.81	0.81	0.81	0.82	0.82	0.82	0.83	0.83	0.83	0.83	0.83
-30	9.46	9.40	9.32	9.23	9.11	8.98	9.16	9.33	9.47	9.60	9.69	9.75	9.78	9.64	9.38
-20	259.4	258.6	257.3	255.5	253.3	250.7	253.5	256	258	259.6	260.7	261.4	261.3	259.4	260.2
-15	469	468.1	466.7	464.8	462.2	459	461.2	462.9	463.9	464.4	464.4	464	461.9	460.2	457.9
-10	548.3	547.4	546.4	545.2	543.8	542.3	541.8	541.1	540.3	539.3	538.3	537.3	535.6	533.5	530.4
-9	552.8	552	550.9	549.7	548.5	547.1	546.3	545.5	544.5	543.5	542.5	541.6	539.6	537.6	534.7
-8	555.6	555.3	554.1	552.9	551.6	550.1	549.3	548.4	547.4	546.3	545.4	544.5	542.4	540.2	537.8
-7	558.7	558.5	557.5	556.2	554.8	553.3	552.5	551.6	550.6	549.5	548.6	547.6	545.5	543.2	540.6
-6	561.9	561.5	560.7	559.5	558.2	556.8	555.9	554.9	553.8	552.8	551.8	550.6	548.6	546.4	543.6
-5	564.7	564	563.3	562.2	560.9	559.4	558.7	557.7	556.7	555.7	554.6	553.5	551.6	549.5	545.9
-4	567	566.4	565.8	564.9	563.6	562.2	561.5	560.6	559.5	558.3	557.2	556.5	554.4	551.6	548
-3	569.8	569.2	568.5	567.7	566.6	565.2	564.6	563.6	562.2	561.3	560.6	559.6	557.3	554.2	550.8
-2.5	571.4	570.9	570.1	569.3	568.2	566.6	566.3	565.1	563.7	563.3	562.5	561.3	558.7	556	552.6
-2	572.9	572.8	572	570.9	569.9	568.3	567.9	566.5	565.6	565.1	564	562.7	560.5	557.8	554.2
-1.5	574.5	574.4	573.9	572.7	571.6	569.9	569.3	567.9	567.3	566.4	565.2	564.3	562.4	559.5	555.7
-1	576.3	576.1	575.7	574.8	573.2	571.6	570.4	569.6	568.6	567.8	567.2	566.3	564	561	557.1
-0.5	577.7	577.9	577.6	576.9	575.5	572.9	572	570.9	570.5	569.8	568.9	567.8	565.3	562.2	558.2
0	578.2	577.7	576.9	576	575.1	574.3	573.6	572.7	571.9	571.1	570	569.1	566.5	563.3	559.2
0.5	578.9	578.4	577.5	576.4	575.7	575.3	575.8	575.6	574.9	574	572.7	571.5	568.6	565.3	561.2
1	579.2	578.6	577.9	577.4	576.6	576.2	576.1	575.7	575.2	574.5	573.7	572.9	570.6	567.1	562.9
1.5	579.5	579	578.6	577.8	577.3	576.8	576.3	575.8	575	574.4	573.8	572.9	570.7	568.2	564.6
2	579.3	579	578.5	577.8	577.3	576.9	576.1	575.5	574.8	573.8	573.1	572.4	570.4	567.6	564.3
2.5	578.9	578.4	578	577.3	576.8	576.4	575.5	574.8	574.1	573.1	572	571.2	569.5	566.8	563.5
3	577.9	577.6	577.1	576.4	575.8	575.2	574.3	573.5	572.8	571.9	570.9	569.8	568	565.6	562.4
4	575.6	575.3	574.5	573.7	573.3	572.6	571.6	570.3	569.6	569	568.1	566.9	564.2	561.8	559.2
5	572.2	571.6	570.9	570.3	569.7	568.9	567.8	566.5	565.4	564.7	563.9	562.7	560.3	557.4	554.9
6	568	567.5	566.8	566.3	565.6	564.7	563.7	562.4	560.9	560.1	559.3	558.4	556.2	553.3	550.1
7	562.5	562.1	561.8	561.5	560.9	560.1	559	557.7	556.1	554.7	554	553.1	550.9	548.1	545.1
8	555.5	555.2	555	554.6	553.9	553.1	552.1	550.8	549.3	547.6	546.7	545.9	544.1	541.8	538.2
9	546.3	546.4	546.3	545.9	545.2	544.3	543.3	541.9	540.3	538.4	536.6	536.2	534.8	532.4	529.2
10	535	535.1	534.8	534.3	533.5	532.4	531.6	530.5	529.1	527.5	525.6	524.7	523.3	521.5	519.5
15	396.4	396.8	396.7	395.9	394.4	392.4	393.1	393.1	392.6	391.5	389.7	387.5	381.6	384	384.4
20	222.7	222.6	222.3	221.8	221.1	220.2	220.9	221.4	221.7	221.8	221.7	221.4	220.2	218.3	220.1
30	7.57	7.53	7.49	7.44	7.37	7.30	7.35	7.39	7.42	7.44	7.46	7.46	7.43	7.35	7.24
45	0.82	0.82	0.82	0.82	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.80	0.79
60	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:XT

Test Date:2025-11-20

V(B) Range:-90 - 90DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293

Humidity:65.0%

Test Distance:6.350m [K=1.0000]

Remarks:

Table--3

LUMINOUS DISTRIBUTION INTENSITY DATA

UNIT: cd

H(°) \ V(°)	7	8	9	10	15	20	30	45	60	75	90				
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
-60	0.04	0.04	0.04	0.04	0.02	0.02	0.01	0.00	0.00	0.00					
-45	0.82	0.82	0.81	0.79	0.79	0.67	0.35	0.11	0.03	0.01					
-30	9.21	10.24	12.64	13.67	9.14	23.99	5.55	0.51	0.15	0.02					
-20	260.7	259.4	256.8	251.5	243.7	216.6	128.4	5.18	0.22	0.04					
-15	455.2	451.4	444.2	435.9	408.6	369.4	247.3	10.65	0.28	0.05					
-10	526.7	522.6	517.7	511.8	471.3	438.9	342.3	13.99	0.32	0.06					
-9	530.8	526.7	521.9	515.1	475.6	443.5	356.9	14.55	0.32	0.06					
-8	534.3	530.1	524.3	517.6	479.6	447.7	363.7	15.06	0.33	0.06					
-7	537.3	532.2	526.2	519.6	482.8	451.5	368.8	15.53	0.34	0.06					
-6	539.3	534.3	528.2	521.2	485.6	455.1	373.4	15.96	0.34	0.06					
-5	541.4	536	530.3	523.8	487.9	457.9	377.1	16.34	0.35	0.06					
-4	543.5	538.7	533	526.4	489.7	460.1	380.1	16.66	0.36	0.07					
-3	546.8	541.6	535.5	528.4	492	462	382.5	16.93	0.36	0.07					
-2.5	548.4	542.9	536.6	529.5	493.1	462.8	383.5	17.05	0.37	0.07					
-2	549.8	544.2	537.9	530.9	494	463.6	384.4	17.15	0.37	0.07					
-1.5	551.2	545.6	539.1	532	494.8	464.3	385.1	17.23	0.37	0.07					
-1	552.4	546.8	540.1	533	495.5	465	385.6	17.31	0.38	0.07					
-0.5	553.4	547.8	541	533.8	496.1	465.6	386	17.36	0.38	0.07					
0	554.2	548.6	541.6	534.4	496.5	466.1	386.1	17.41	0.38	0.07	0.00				
0.5	556.2	550.5	543.6	536.4	497.7	466.4	386.5	17.19	0.38	0.07					
1	558	552.2	545.5	538.3	498.8	466.5	386.7	16.95	0.37	0.07					
1.5	559.7	553.8	547.2	539.9	499.8	466.6	386.7	16.71	0.37	0.07					
2	560.7	555.2	548.7	541.4	500.6	466.7	386.6	16.45	0.37	0.07					
2.5	559.7	554.9	549.8	542.6	501.3	466.6	386.4	16.17	0.36	0.07					
3	558.6	553.9	548.7	542.6	501.8	466.5	386	15.89	0.36	0.07					
4	555.8	551.3	546.2	540.2	502.5	466	384.8	15.28	0.35	0.07					
5	551.7	548	543.2	537.4	499.4	465.2	383.2	14.62	0.34	0.06					
6	547.1	543.1	538.6	533.6	495.1	462	381.2	13.93	0.33	0.06					
7	541.5	537.3	532.8	527.3	489.7	454.9	378.5	13.19	0.32	0.06					
8	534.3	530.6	525.7	519.8	483.3	446.8	375.6	12.42	0.31	0.06					
9	526.1	522.1	516.9	511.4	475.4	437.6	370.2	11.62	0.30	0.06					
10	515.6	510.6	506	501.8	460.9	427.1	347.9	10.79	0.28	0.06					
15	382.6	379	374.7	370.7	336.1	316.8	221.9	6.56	0.23	0.05					
20	221.3	220.3	217.3	213.5	199.3	183.7	100.1	3.05	0.18	0.04					
30	7.10	7.34	7.97	8.11	6.88	10.82	5.01	0.33	0.07	0.02					
45	0.78	0.77	0.76	0.74	0.64	0.61	0.27	0.02	0.01	0.01					
60	0.04	0.04	0.04	0.04	0.03	0.01	0.00	0.00	0.00	0.00					
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:XT

Test Date:2025-11-20

V(B) Range:-90 - 90DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293

Humidity:65.0%

Test Distance:6.350m [K=1.0000]

Remarks: