

投光灯具参数概要:


报告中的参数折算为光源光通为1000lm条件下.

最大光强 (Luminaire orientation as tested.)		379.2 cd/1000lm.
		0.0 度 (垂直)
		0.0 度 (水平)
光束角	10% Imax	158.3V x 160.5H
	50% Imax	104.4V x 110.8H
	90% Imax	49.2V x 46.3H
光束内光通	总计	1000.1 lm/1000lm.
	至 10% Imax	983.2 lm/1000lm.
	至 50% Imax	707.1 lm/1000lm.
	至 90% Imax	160.2 lm/1000lm
	上射 LOR	0.0 %
	下射 LOR	100.0 %
灯具效率(光输出比)		100.0 %

H(β) 角度范围:-90度 - 90度	V(B) 角度范围:-90度 - 90度
H(β) 角度间隔: 0.5度	V(B) 角度间隔: 0.5度
测试速度: 快速	测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.293
环境温度:25.3℃	环境湿度:65.0%
测试人员:	测试距离:6.350米 [K=1.0000]
测试日期:2024-09-27	备注:

灯 具 光 度 数 据

实测参数: U:221.8V I:0.1720A P:16.71W PF:0.4380 实检光通:433.534x1 lm		
灯具名称: 691212-4000K-120-9W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

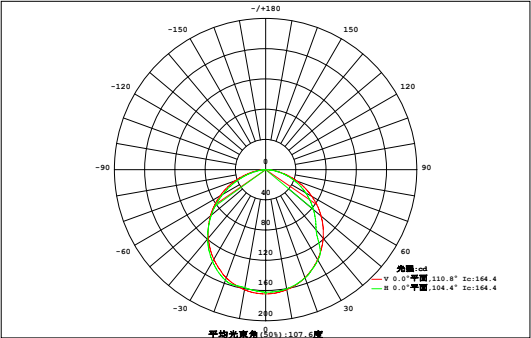

光源 数 据		光度数据 光效:25.94lm/W	
型号	691212-4000K-120-9W	峰值光强(cd)	164.4
标称功率(W)	9	有效效率(%)	98.2
额定电源电压(V)	220	有效光通(lm)	425.6
额定光通量(lm)	433.534	灯具效率(%)	100.0
灯具内光源数(只)	1	总光通量(lm)	433.5
实测电源电压(V)	220	50%光束角(H,V)	111°,104°

垂 直 角 度 V (°)	区 域 光 通 量																单 位 : lm		Φ 总	Φ 有
	0.00	0.01	0.04	0.08	0.13	0.19	0.24	0.26	0.26	0.26	0.26	0.29	0.25	0.17	0.11	0.05	0.02	0.00	2.62	0.26
90	0.00	0.01	0.04	0.08	0.13	0.19	0.24	0.26	0.26	0.26	0.26	0.29	0.25	0.17	0.11	0.05	0.02	0.00	2.62	0.26
80	0.00	0.04	0.13	0.27	0.45	0.64	0.82	0.94	0.89	0.83	0.81	0.81	0.69	0.49	0.31	0.15	0.05	0.01	8.32	7.60
70	0.01	0.07	0.24	0.51	0.83	1.17	1.48	1.69	1.62	1.50	1.44	1.40	1.17	0.85	0.54	0.26	0.08	0.01	14.9	14.6
60	0.01	0.11	0.36	0.75	1.20	1.67	2.11	2.42	2.34	2.15	2.06	1.97	1.63	1.19	0.76	0.38	0.12	0.01	21.2	21.1
50	0.02	0.15	0.48	0.96	1.54	2.14	2.68	3.08	3.04	2.76	2.66	2.50	2.04	1.50	0.95	0.48	0.16	0.02	27.2	27.1
40	0.02	0.18	0.57	1.15	1.84	2.54	3.18	3.65	3.81	3.43	3.23	2.96	2.40	1.76	1.12	0.57	0.19	0.02	32.6	32.6
30	0.02	0.21	0.65	1.30	2.07	2.87	3.58	4.11	4.40	3.91	3.72	3.33	2.69	1.96	1.25	0.64	0.22	0.03	37.0	36.9
20	0.02	0.23	0.71	1.40	2.23	3.08	3.85	4.43	4.73	4.20	4.08	3.59	2.88	2.11	1.36	0.70	0.24	0.03	39.9	39.8
10	0.02	0.24	0.73	1.45	2.30	3.18	3.99	4.59	4.90	4.47	4.33	3.81	3.09	2.26	1.44	0.74	0.25	0.03	41.8	41.8
0	0.02	0.23	0.70	1.38	2.18	2.98	3.68	4.20	4.35	4.85	4.55	3.94	3.16	2.29	1.45	0.74	0.25	0.03	41.0	40.9
-10	0.02	0.20	0.62	1.20	1.88	2.61	3.27	3.72	4.09	4.61	4.28	3.73	2.99	2.17	1.37	0.70	0.24	0.03	37.7	37.7
-20	0.02	0.17	0.51	1.01	1.64	2.29	2.85	3.24	4.14	4.26	3.89	3.39	2.72	1.97	1.25	0.64	0.21	0.02	34.2	34.1
-30	0.01	0.13	0.41	0.83	1.35	1.89	2.36	2.93	3.76	3.76	3.40	2.96	2.37	1.71	1.08	0.55	0.19	0.02	29.7	29.6
-40	0.01	0.09	0.30	0.63	1.04	1.46	1.90	2.60	3.14	3.12	2.81	2.44	1.96	1.41	0.88	0.45	0.15	0.02	24.4	24.2
-50	0.01	0.05	0.20	0.43	0.74	1.08	1.50	2.24	2.46	2.36	2.14	1.85	1.48	1.06	0.66	0.33	0.11	0.01	18.7	18.5
-60	0.00	0.02	0.11	0.27	0.47	0.76	1.14	1.81	1.74	1.53	1.40	1.21	0.97	0.69	0.43	0.21	0.07	0.01	12.8	12.3
-70	0.00	0.01	0.05	0.13	0.26	0.50	0.83	1.17	0.94	0.73	0.67	0.58	0.46	0.33	0.20	0.10	0.04	0.01	7.02	5.63
-80	0.00	0.01	0.02	0.06	0.13	0.25	0.45	0.63	0.33	0.13	0.12	0.11	0.09	0.07	0.04	0.03	0.01	0.00	2.47	0.93
-90	0.00	0.01	0.02	0.06	0.13	0.25	0.45	0.63	0.33	0.13	0.12	0.11	0.09	0.07	0.04	0.03	0.01	0.00	2.47	0.93
横 向 角 度 H (°)																				
Φ 总	0.23	2.17	6.82	13.8	22.3	31.3	39.9	47.7	50.9	48.9	45.8	40.9	33.0	24.0	15.2	7.73	2.61	0.31	434	---
Φ 有	0.00	1.66	6.32	13.2	21.7	30.8	39.5	47.5	50.5	48.4	45.4	40.4	32.6	23.6	14.8	7.28	2.11	0.01	---	426

半边峰角: U:38.5,D:48.6 , L:55.6,R:55.8 NEMA Beam Type: Type 7

H(β) 角度范围:-90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B) 角度范围:-90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

灯 具 等 光 强 曲 线


实测参数: U:221.8V I:0.1720A P:16.71W PF:0.4380 实检光通:433.534x1 lm		
灯具名称: 691212-4000K-120-9W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

锥面光通量(90度):

234.59 lm
%lum = 54.1%
%lamp = 54.1%

锥面光通量(120度):

341.86 lm
%lum = 78.8%
%lamp = 78.9%

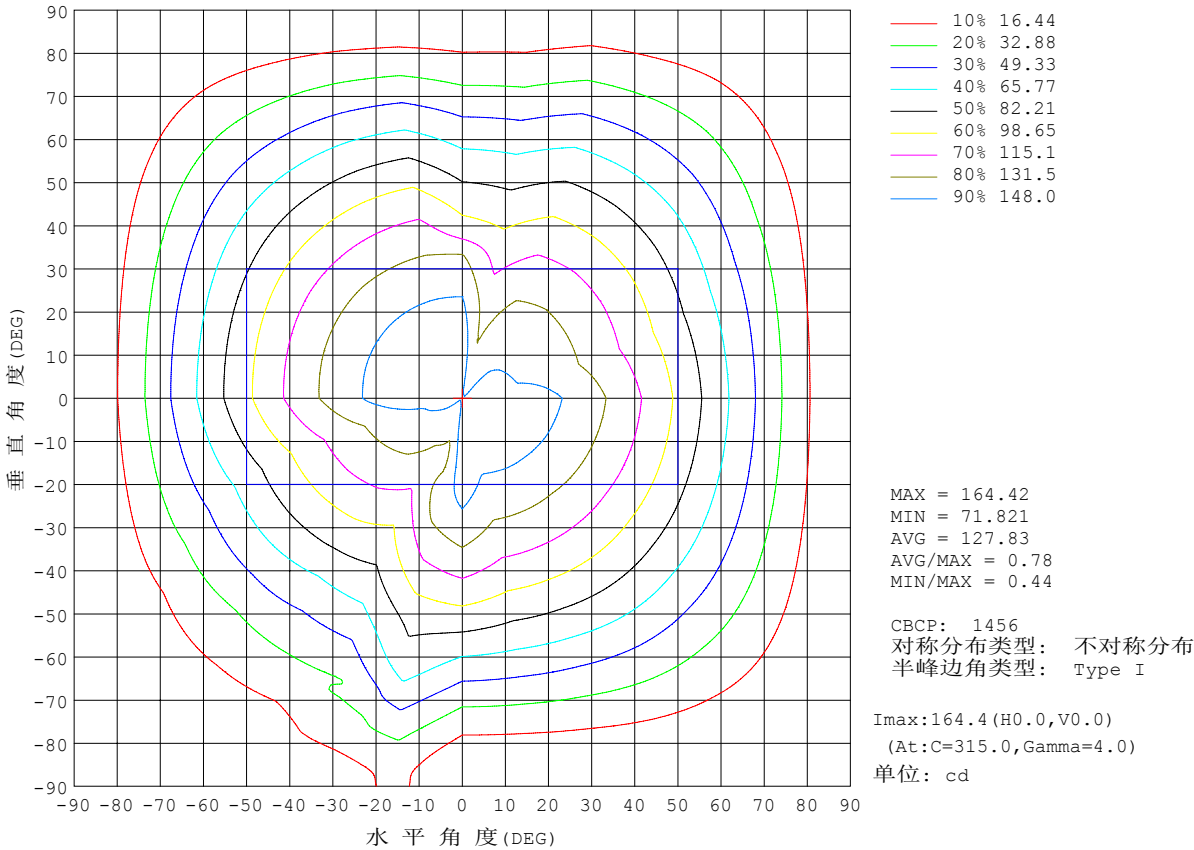


H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

平面等照度曲线


实测参数: U:221.8V I:0.1720A P:16.71W PF:0.4380 实检光通:433.534x1 lm		
灯具名称: 691212-4000K-120-9W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

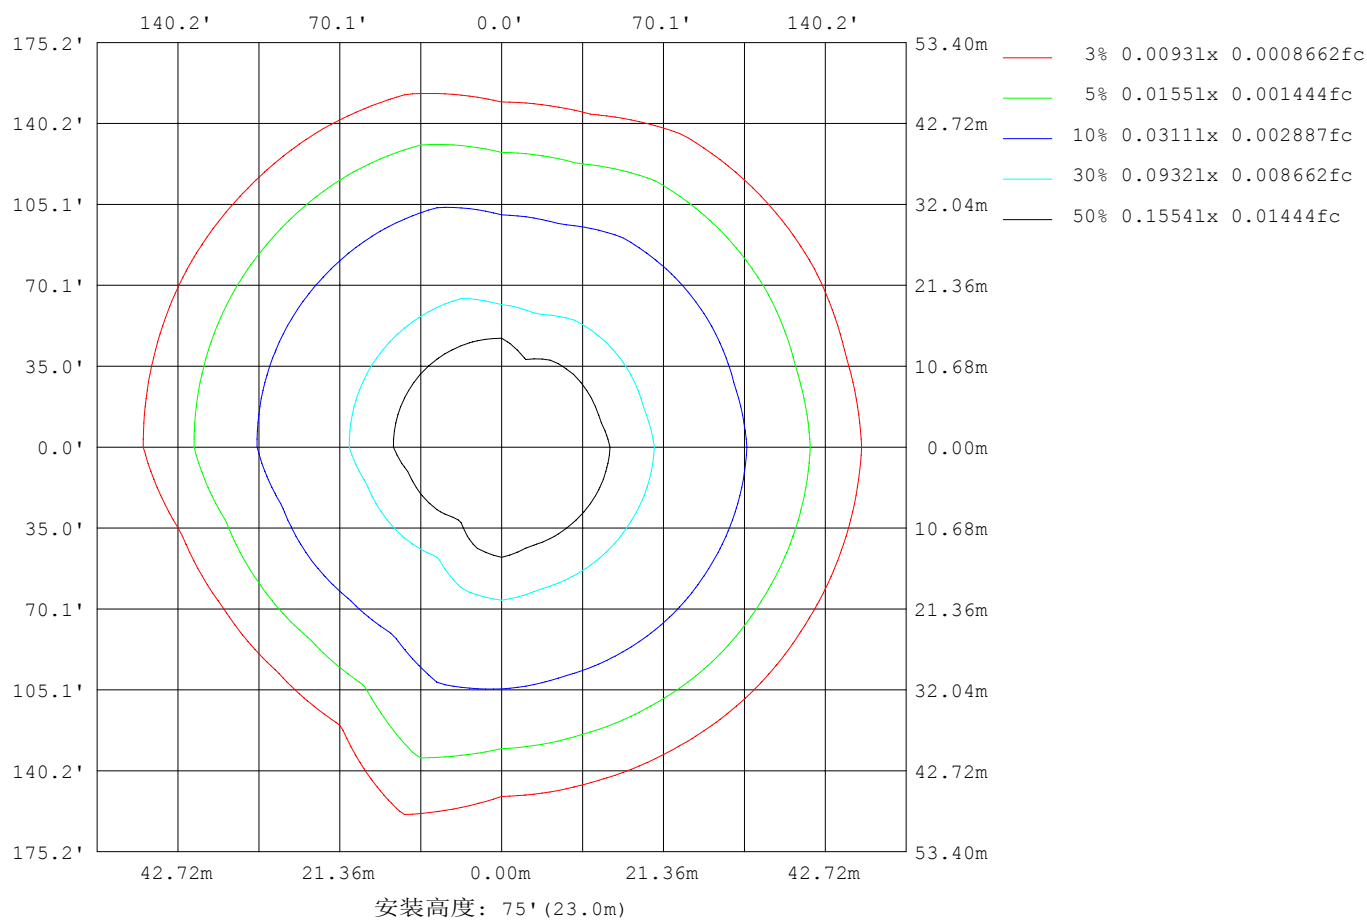

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

平面照度曲线

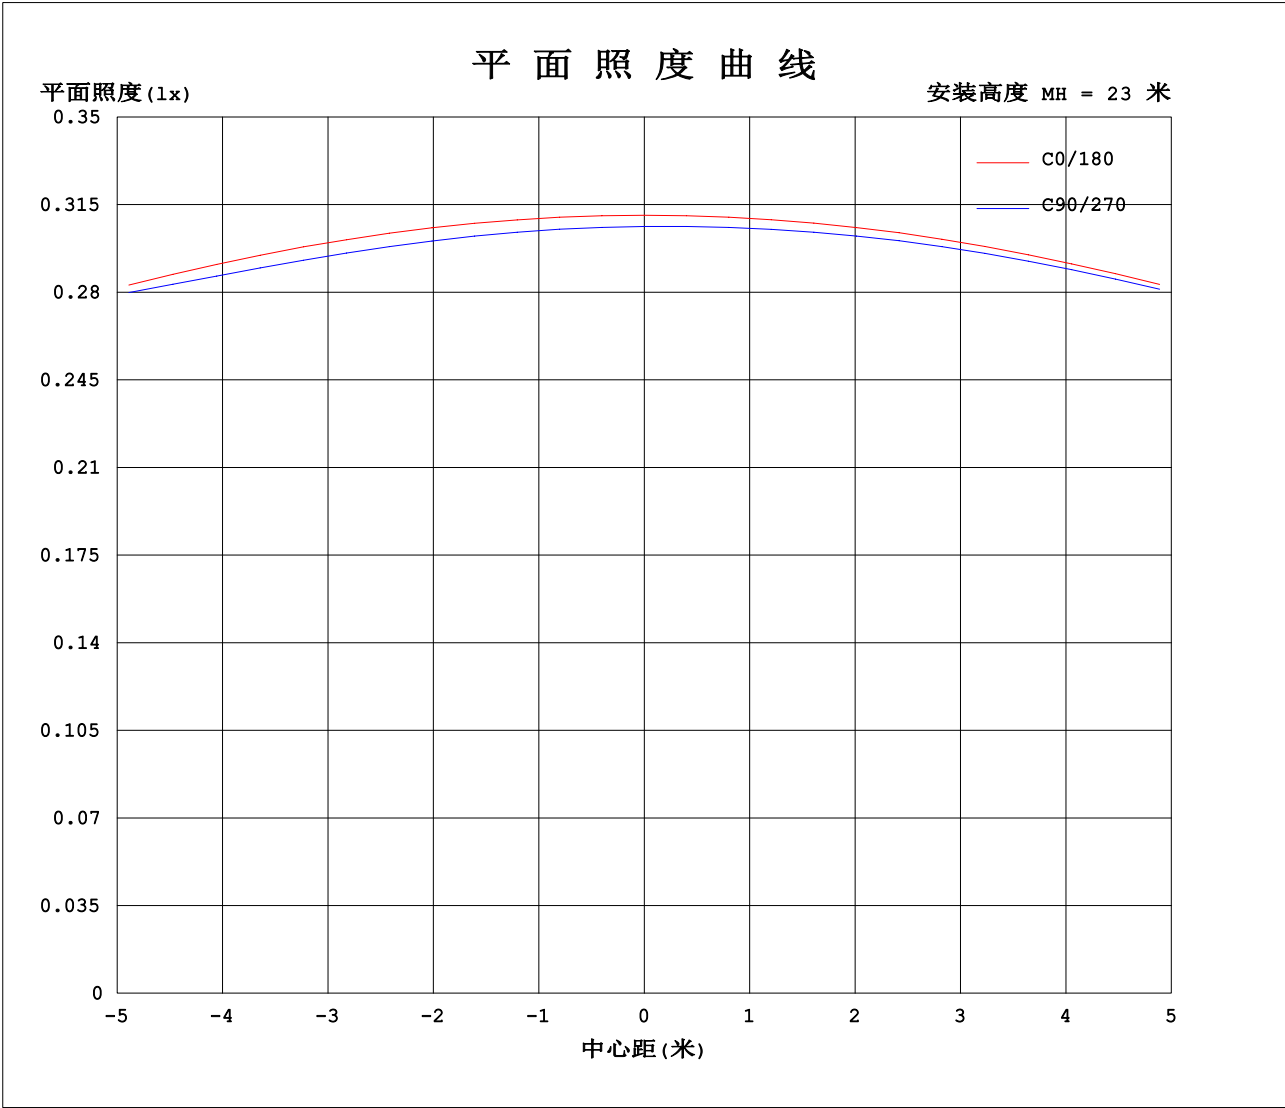


H(β) 角度范围: -90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-09-27

V(B) 角度范围: -90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.0.293
环境湿度: 65.0%
测试距离: 6.350米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:221.8V I:0.1720A P:16.71W PF:0.4380 实检光通:433.534x1 lm		
灯具名称: 691212-4000K-120-9W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

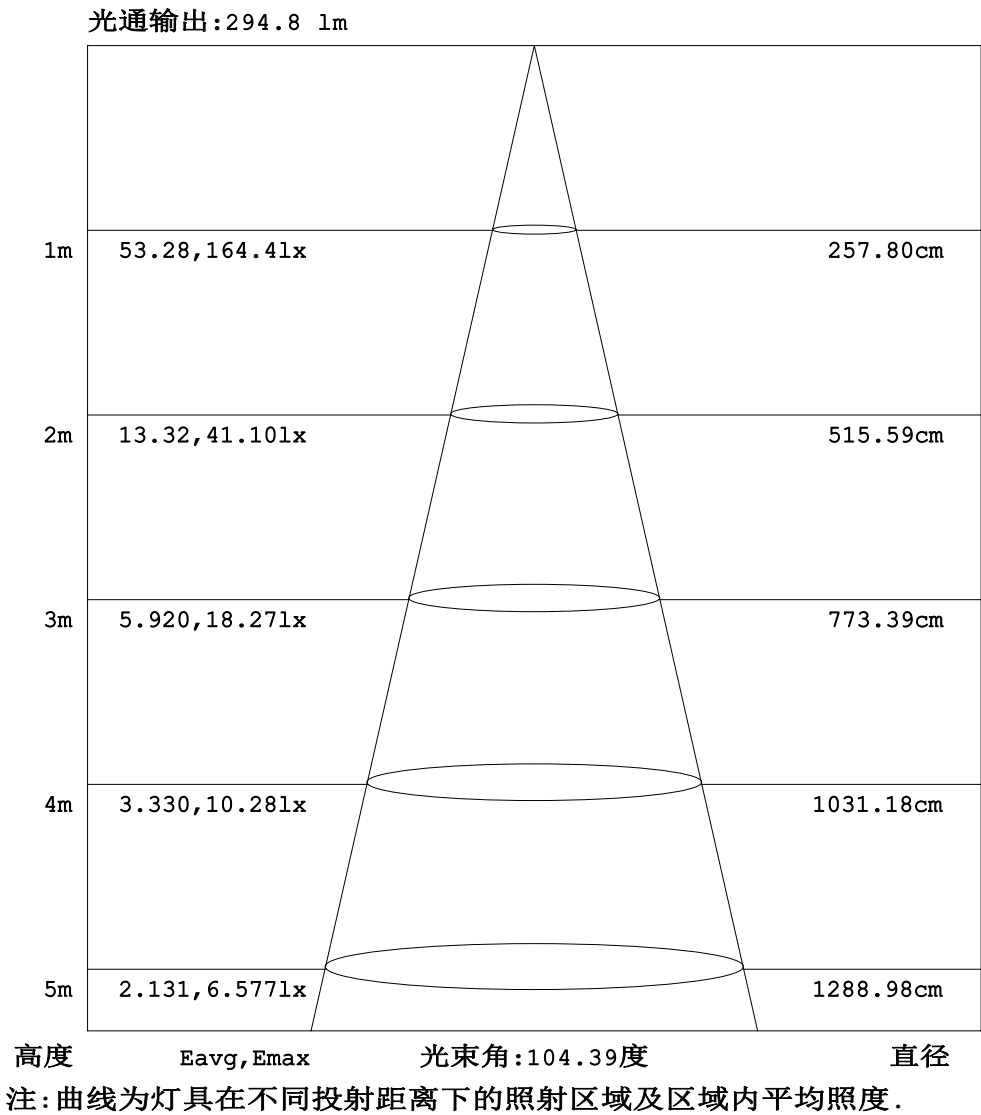

H(β) 角度范围:-90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B) 角度范围:-90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

表--1

光 强 分 布 数 据 表 格

单位: cd

H (DEG) V (DEG)	-90	-75	-60	-45	-30	-20	-15	-10	-9	-8	-7	-6	-5	-4	-3
-90		0.61	0.64	5.54	9.35	16.40	19.92	13.53	12.25	10.97	9.69	8.41	7.13	5.86	4.58
-75		1.12	5.07	11.73	25.33	35.56	42.16	37.24	35.97	34.69	33.39	32.08	30.77	29.44	28.09
-60		3.96	15.80	27.90	39.53	59.46	72.29	74.40	73.54	72.68	71.82	70.96	70.08	69.20	68.30
-45		10.16	29.51	48.42	63.60	76.16	88.67	99.94	100.8	101.6	102.3	103.1	103.8	104.6	105.2
-30		18.13	43.49	69.73	90.12	97.28	101.6	120	123.8	127.5	129.9	131.5	133.1	134.7	136.2
-20		22.69	53.57	81.61	105.9	116.2	117.7	121	124.4	127.6	130.6	133.3	136	139.6	143.4
-15		24.66	58.37	86.69	112.5	124.2	127.6	126.5	125.9	126.4	127.6	128.5	129	129.3	136.1
-10		26.39	62.75	94.30	117.9	130.7	134.8	136.5	136	135.2	134.3	133.1	132.6	132.1	131.4
-9		26.70	63.57	95.72	118.8	131.9	136.2	138	138	137.3	136.3	135.1	133.8	133.2	132.4
-8		27.00	64.37	97.12	120.9	133	137.5	139.5	139.6	139.4	138.4	137.2	135.6	134.4	133.4
-7		27.29	65.14	98.50	123	134	138.6	141.1	141.1	141	140.7	139.4	137.8	135.8	134.6
-6		27.57	65.89	99.83	125.2	135	139.8	142.6	142.8	142.7	142.4	141.9	140.2	138.1	136.1
-5		27.84	66.62	101.1	127.3	137.2	140.8	144	144.4	144.5	144.3	143.8	143	140.8	138.1
-4		28.09	67.32	102.4	129.3	140.3	142.2	145.2	145.6	146.1	146.2	145.8	145	143.9	141.1
-3		28.34	68.00	103.7	131.3	143.3	146	146.3	146.9	147.6	147.8	147.7	147.4	146.4	144.8
-2.5		28.46	68.33	104.3	132.3	144.9	148	147.7	147.5	148.3	148.7	148.7	148.4	147.8	146.3
-2		28.57	68.65	104.9	133.3	146.4	149.9	150.4	150.2	149.9	149.5	149.6	149.5	149.1	148.1
-1.5		28.68	68.97	105.4	134.3	147.9	151.8	153.1	153.1	153	152.3	151.2	150.5	150.3	149.7
-1		28.79	69.28	106	135.3	149.4	153.7	155.8	156.1	156.2	155.8	155.2	154	152.1	151.1
-0.5		28.90	69.59	106.6	136.2	150.9	155.6	158.6	159	159.3	159.4	159.3	158.8	158	156.3
0	0.05	29.00	69.88	107.1	137.1	152.4	157.5	161.4	162	162.5	163	163.4	163.7	164	164.1
0.5		29.00	69.89	107.2	137.2	152.3	157.5	161.3	161.9	162.4	162.8	163.2	163.5	163.7	163.8
1		29.00	69.89	107.2	137.2	152.3	157.5	161.2	161.8	162.3	162.7	163.1	163.3	163.5	163.5
1.5		29.00	69.89	107.2	137.2	152.3	157.4	161.1	161.7	162.1	162.6	162.9	163.1	163.3	163.3
2		29.00	69.88	107.2	137.2	152.2	157.4	161	161.6	162	162.4	162.7	163	163.1	163.1
2.5		28.99	69.86	107.2	137.2	152.1	157.3	160.9	161.4	161.9	162.3	162.6	162.8	162.9	162.9
3		28.98	69.84	107.1	137.2	152.1	157.2	160.8	161.3	161.8	162.2	162.5	162.7	162.8	162.7
4		28.95	69.77	107	137.1	151.8	157	160.6	161.1	161.6	161.9	162.2	162.3	162.4	162.4
5		28.90	69.67	106.9	137	151.6	156.7	160.4	160.9	161.3	161.6	161.9	162	162.1	162.1
6		28.85	69.55	106.7	136.8	151.3	156.5	160.1	160.5	160.9	161.3	161.5	161.7	161.8	161.8
7		28.78	69.40	106.5	136.5	151	156.2	159.7	160.1	160.5	160.8	161.1	161.3	161.5	161.5
8		28.70	69.23	106.3	136.3	150.7	155.8	159.2	159.6	160	160.4	160.7	160.9	161.1	161.1
9		28.61	69.03	106	135.9	150.3	155.4	158.6	159.1	159.5	159.9	160.2	160.5	160.5	160.6
10		28.50	68.80	105.7	135.4	149.9	154.8	158.1	158.6	159	159.4	159.7	159.9	160	160
15		27.79	67.28	103.5	132.4	146.1	151.2	154.7	155.3	155.7	156	156.2	156.4	156.5	156.7
20		26.79	65.07	100.3	128.3	141.8	146.4	150.1	150.5	150.9	151.2	151.5	151.7	151.9	152.1
30		23.95	58.91	91.21	116.7	128.7	133	136.1	136.6	137	137.4	137.6	137.9	138.1	138.2
45		18.07	45.90	71.66	92.12	101.9	105.3	106.7	105.5	104.3	103.1	101.8	100.5	99.17	97.76
60		11.08	29.59	47.21	61.66	68.32	70.66	69.40	68.68	67.94	67.16	66.36	65.53	64.67	63.79
75		4.45	12.43	20.66	27.97	31.15	32.30	31.17	30.85	30.53	30.18	29.83	29.46	29.07	28.68
90		0.59	0.37	0.73	1.18	1.41	1.53	1.56	1.57	1.58	1.58	1.59	1.60	1.61	1.61

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

表--2

光强分布数据表格

单位: cd

H (DEG) V (DEG)	-2.5	-2	-1.5	-1	-0.5	0	0.5	1	1.5	2	2.5	3	4	5	6
-90	3.94	3.30	2.66	2.02	1.38	0.74	0.73	0.73	0.72	0.72	0.71	0.70	0.69	0.68	0.67
-75	27.42	26.74	26.06	25.37	24.69	24.00	23.99	23.99	23.98	23.97	23.96	23.95	23.91	23.86	23.79
-60	67.84	67.38	66.91	66.44	65.96	65.47	65.38	65.29	65.19	65.08	64.97	64.85	64.59	64.30	63.99
-45	105.6	105.9	106.2	106.5	106.8	107	106.7	106.4	106	105.6	105.3	104.9	104.1	103.2	102.3
-30	136.9	137.7	138.4	139.1	139.8	140.5	139.8	139.1	138.3	137.6	136.8	136	134.5	132.8	131.2
-20	145.4	147.5	149.6	151.6	153.7	155.8	154.8	153.7	152.7	151.6	150.5	149.4	147.2	144.9	144.2
-15	139.7	143.3	147	150.8	154.5	158.3	157.5	156.8	156	155.2	154.4	153.5	151.8	151.5	151.3
-10	132.8	137.9	143	148.2	153.4	158.7	158.4	158	157.7	157.3	156.9	156.7	156.6	156.4	156.2
-9	131.9	136.2	141.8	147.5	153.3	159.1	158.8	158.5	158.2	157.9	157.6	157.6	157.4	157.2	157.1
-8	132.8	134	140.2	146.6	153	159.5	159.3	159	158.7	158.4	158.3	158.3	158.2	158.1	157.9
-7	133.8	133	138	145.2	152.6	160	159.8	159.5	159.2	159	159	159	158.9	158.9	158.7
-6	135.2	134.1	135	143.3	151.8	160.4	160.2	159.9	159.7	159.7	159.7	159.7	159.7	159.6	159.5
-5	136.9	135.6	134.2	140.4	150.5	160.8	160.6	160.4	160.2	160.3	160.3	160.3	160.4	160.3	160.1
-4	139.3	137.6	135.9	135.9	148.4	161.2	161	160.8	160.8	160.9	160.9	161	161.1	161	160.7
-3	142.9	140.7	138.3	135.7	144.5	161.5	161.3	161.2	161.3	161.5	161.6	161.7	161.7	161.6	161.4
-2.5	145.1	142.8	140	137	141.4	161.6	161.4	161.4	161.7	161.8	162	162.1	162	161.9	161.8
-2	146.9	145.5	142.5	138.8	136.7	161.8	161.5	161.7	162	162.2	162.3	162.4	162.4	162.3	162.1
-1.5	149.1	147.7	145.8	141.6	136.3	161.8	161.7	162	162.4	162.6	162.7	162.8	162.8	162.6	162.4
-1	150.7	150.2	148.9	146.1	139.3	161.9	162	162.6	162.8	163	163.2	163.2	163.2	163	162.7
-0.5	154.9	152.8	151.6	150.6	146.5	162	162.7	163.2	163.5	163.6	163.7	163.7	163.5	163.3	163
0	164.2	164.3	164.3	164.4	164.4	164.4	164.4	164.4	164.3	164.3	164.2	164.1	163.9	163.6	163.3
0.5	163.8	163.8	163.7	163.4	162.8	162.1	147	151.1	152	153.1	155.2	156.6	158.3	159.1	159.6
1	163.5	163.4	163.2	162.8	162.3	162.1	140.1	147.3	149.9	151.1	151.6	151.9	152.8	154.7	155.9
1.5	163.2	163.1	162.8	162.6	162.2	162.1	136.8	143.2	147.7	149.4	150.6	151.1	151.5	151.6	152.3
2	163	162.8	162.6	162.4	162.1	162.1	137.1	140.4	144.7	148	149.3	150.2	151	151.2	151.2
2.5	162.8	162.7	162.5	162.3	162.1	162.1	141.9	138.4	142.4	145.6	148.4	149.3	150.4	150.8	150.9
3	162.6	162.5	162.4	162.2	162.1	162.1	145.2	136.9	140.6	143.7	146.4	148.6	149.7	150.4	150.5
4	162.3	162.3	162.1	162	162	162	149.3	136.9	137.8	140.7	143.2	145.2	148.5	149.3	149.7
5	162.1	162	161.9	161.9	161.9	161.9	151.6	141.6	135.9	138.4	140.7	142.9	145.9	148.3	148.8
6	161.8	161.7	161.7	161.7	161.7	161.7	153.1	144.7	136.5	136.5	138.7	140.7	144	146.2	148
7	161.5	161.4	161.4	161.4	161.4	161.3	154	146.8	139.6	135	136.9	138.9	142.4	144.6	146.3
8	161	161	161	161	161	161	154.6	148.2	141.9	135.7	135.4	137.2	140.6	143.2	144.8
9	160.6	160.6	160.6	160.6	160.6	160.6	154.9	149.2	143.5	138	133.9	135.6	138.8	141.9	143.5
10	160	160.1	160.1	160.1	160.1	160.1	154.9	149.8	144.7	139.6	134.6	134.1	137.2	140.1	142.4
15	156.8	156.8	156.9	156.9	156.9	156.9	153.4	150	146.5	143	139.6	136.1	129.7	132.1	134.3
20	152.2	152.3	152.3	152.3	152.4	152.4	149.8	147.2	144.6	142	139.4	136.8	131.6	126.5	126.7
30	138.2	138.3	138.3	138.3	138.3	138.3	136.7	135.1	133.4	131.8	130.2	128.5	125.2	121.9	118.5
45	97.05	96.32	95.58	94.83	94.08	93.31	93.15	92.99	92.82	92.64	92.45	92.25	91.83	91.38	90.90
60	63.33	62.88	62.41	61.94	61.47	60.98	60.96	60.93	60.89	60.85	60.80	60.75	60.63	60.48	60.32
75	28.48	28.27	28.07	27.86	27.64	27.43	27.44	27.45	27.46	27.47	27.47	27.47	27.46	27.44	27.41
90	1.62	1.62	1.62	1.63	1.63	1.63	1.64	1.66	1.67	1.68	1.69	1.70	1.72	1.74	1.77

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

表--3

光强分布数据表格

单位: cd

H (DEG) V (DEG)	7	8	9	10	15	20	30	45	60	75	90				
-90	0.66	0.65	0.63	0.62	0.56	0.57	0.59	0.62	0.66	0.70					
-75	23.72	23.63	23.54	23.43	22.75	21.93	19.58	15.22	9.45	4.38					
-60	63.65	63.29	62.90	62.49	60.42	58.32	52.57	40.83	25.90	10.89					
-45	101.4	100.5	99.53	98.54	95.79	92.63	84.01	65.48	42.58	18.07					
-30	129.5	128.3	128	127.6	124.8	120.8	109.6	86.01	56.55	24.33					
-20	144	143.7	143.4	143	139.7	135.2	122.8	96.63	63.58	27.50					
-15	150.9	150.5	150.1	149.6	145.9	141.5	128.2	100.7	66.21	28.70					
-10	156	155.7	155.3	154.9	151.3	146.3	132.5	104	68.30	29.62					
-9	156.8	156.5	156.2	155.7	152.1	147.1	133.2	104.5	68.65	29.77					
-8	157.7	157.4	156.9	156.4	152.9	147.9	133.9	105	68.97	29.91					
-7	158.5	158.1	157.6	157.1	153.7	148.7	134.5	105.5	69.27	30.03					
-6	159.2	158.8	158.3	157.8	154.5	149.4	135.1	105.9	69.54	30.14					
-5	159.8	159.4	159	158.5	155.2	150.1	135.6	106.2	69.78	30.25					
-4	160.4	160.1	159.7	159.2	155.8	150.6	136.1	106.6	70.00	30.33					
-3	161.1	160.8	160.4	159.9	156.3	151.1	136.5	106.9	70.19	30.41					
-2.5	161.5	161.1	160.7	160.2	156.5	151.3	136.7	107	70.27	30.44					
-2	161.8	161.4	161	160.4	156.7	151.5	136.9	107.1	70.35	30.48					
-1.5	162.1	161.7	161.2	160.7	156.9	151.7	137.1	107.3	70.42	30.50					
-1	162.4	162	161.4	160.9	157.1	151.8	137.2	107.4	70.49	30.53					
-0.5	162.6	162.2	161.7	161.1	157.3	152	137.4	107.5	70.55	30.55					
0	162.8	162.4	161.8	161.3	157.4	152.1	137.5	107.6	70.60	30.57	0.89				
0.5	159.7	159.7	159.4	159.1	156.1	151.1	137	107.3	70.54	30.56					
1	156.5	156.9	157	156.9	154.7	150.2	136.5	107.1	70.48	30.56					
1.5	153.4	154.2	154.6	154.8	153.3	149.2	135.9	106.9	70.40	30.55					
2	151	151.5	152.3	152.7	152	148.3	135.3	106.7	70.33	30.53					
2.5	150.7	150.5	150.2	150.5	150.6	147.3	134.8	106.4	70.24	30.52					
3	150.5	150.3	150	149.6	149.2	146.3	134.2	106.1	70.15	30.50					
4	149.9	149.9	149.6	149.1	146.5	144.3	133	105.6	69.95	30.45					
5	149.1	149.3	149.1	148.6	145.8	142.2	131.8	105	69.72	30.39					
6	148.3	148.4	148.3	147.9	145.3	140.9	130.5	104.4	69.47	30.32					
7	147.5	147.7	147.5	147.2	144.8	140.4	129.2	103.8	69.19	30.23					
8	146.1	147	146.8	146.5	144.2	140	127.9	103.1	68.89	30.14					
9	144.7	145.6	146.1	145.9	143.6	139.5	126.7	102.4	68.57	30.03					
10	143.5	144.3	145	145.3	143	139	126.3	101.6	68.23	29.91					
15	136.4	138.3	139.5	139.8	139.6	135.7	123.7	97.62	66.16	29.14					
20	128.4	130.1	131.6	133	134.1	131.6	120.1	94.65	63.51	28.09					
30	115.2	113.5	114.6	115.7	119.9	118.6	109.5	86.87	57.21	25.24					
45	90.39	89.85	89.29	88.70	90.71	92.55	87.04	69.70	45.84	19.43					
60	60.14	59.93	59.71	59.47	59.37	60.87	59.82	47.72	30.93	12.49					
75	27.38	27.33	27.27	27.20	26.92	28.37	29.85	22.75	14.42	5.59					
90	1.79	1.81	1.83	1.86	1.97	2.75	4.32	2.76	1.87	1.41					

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: