

投光灯具参数概要:


报告中的参数折算为光源光通为1000lm条件下.

最大光强		1413.3 cd/1000lm.
(Luminaire orientation as tested.)		0.0 度 (垂直)
		0.0 度 (水平)
光束角	10% I _{max}	69.6V x 65.9H
	50% I _{max}	55.2V x 51.9H
	90% I _{max}	32.0V x 34.8H
光束内光通	总计	1000.2 lm/1000lm.
	至 10% I _{max}	910.2 lm/1000lm.
	至 50% I _{max}	723.6 lm/1000lm.
	至 90% I _{max}	133.4 lm/1000lm
上射 LOR		0.0 %
下射 LOR		100.0 %
灯具效率(光输出比)		100.0 %

H(β) 角度范围:-90度 - 90度	V(B) 角度范围:-90度 - 90度
H(β) 角度间隔: 0.5度	V(B) 角度间隔: 0.5度
测试速度: 快速	测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.293
环境温度:25.3℃	环境湿度:65.0%
测试人员:	测试距离:6.350米 [K=1.0000]
测试日期:2024-09-27	备注:

灯 具 光 度 数 据

实测参数: U:221.9V I:0.0717A P:5.052W PF:0.3178 实检光通:378.168x1 lm		
灯具名称: 691241-4000K-120-5W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

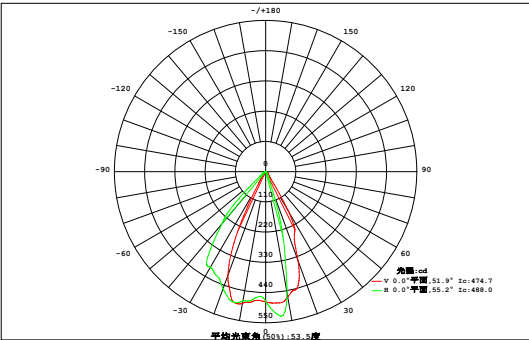

光源 数 据		光度数据 光效:74.86lm/W	
型号	691241-4000K-120-5W	峰值光强(cd)	534.5
标称功率(W)	5	有效效率(%)	91.1
额定电源电压(V)	220	有效光通(lm)	344.6
额定光通量(lm)	378.168	灯具效率(%)	100.0
灯具内光源数(只)	1	总光通量(lm)	378.2
实测电源电压(V)	220	50%光束角(H,V)	52°,55°

垂 直 角 度 V (°)	区 域 光 通 量																单 位 : lm		Φ总	Φ有
	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.48	0.00
45	0.02	0.02	0.03	0.03	0.04	0.06	0.07	0.07	0.08	0.08	0.08	0.07	0.06	0.05	0.03	0.03	0.02	0.02	0.85	0.00
40	0.02	0.03	0.04	0.06	0.07	0.08	0.09	0.10	0.10	0.10	0.10	0.10	0.09	0.08	0.06	0.04	0.03	0.02	1.23	0.00
35	0.03	0.04	0.06	0.08	0.09	0.11	0.13	0.14	0.15	0.15	0.14	0.13	0.12	0.10	0.09	0.07	0.05	0.03	1.69	0.00
30	0.04	0.06	0.08	0.10	0.13	0.16	0.21	0.26	0.31	0.34	0.32	0.25	0.18	0.14	0.11	0.09	0.07	0.04	2.88	0.45
25	0.05	0.07	0.10	0.13	0.20	0.39	0.76	1.09	1.17	1.28	1.30	0.98	0.55	0.28	0.15	0.10	0.07	0.05	8.74	7.30
20	0.06	0.09	0.12	0.21	0.47	1.18	1.94	2.35	2.50	2.61	2.53	2.12	1.50	0.77	0.25	0.12	0.08	0.06	18.9	17.9
15	0.07	0.10	0.17	0.38	1.11	2.17	3.06	3.62	3.82	3.88	3.68	2.95	2.05	1.38	0.57	0.21	0.11	0.07	29.4	28.5
10	0.08	0.12	0.23	0.78	1.95	2.92	3.58	3.81	3.77	3.88	3.83	3.39	2.56	1.81	1.20	0.46	0.14	0.08	34.6	33.9
5	0.09	0.14	0.32	1.16	2.47	3.31	3.63	3.58	3.50	3.54	3.52	3.26	2.88	2.20	1.58	0.74	0.19	0.09	36.2	35.5
0	0.09	0.15	0.36	1.35	2.60	3.43	3.65	3.61	3.58	3.63	3.54	3.16	2.81	2.42	1.74	0.95	0.23	0.10	37.4	36.7
-5	0.09	0.15	0.42	1.37	2.55	3.38	3.58	3.58	3.68	3.78	3.64	3.13	2.73	2.46	1.80	0.98	0.24	0.11	37.7	37.0
-10	0.09	0.15	0.41	1.28	2.39	3.30	3.49	3.44	3.52	3.63	3.44	2.96	2.63	2.32	1.73	0.95	0.26	0.10	36.1	35.5
-15	0.08	0.13	0.32	1.03	2.02	2.99	3.41	3.39	3.33	3.25	3.04	2.76	2.54	2.16	1.59	0.77	0.20	0.10	33.1	32.5
-20	0.08	0.12	0.26	0.78	1.58	2.53	3.19	3.33	3.21	3.02	2.80	2.64	2.35	1.89	1.33	0.50	0.16	0.09	29.8	29.1
-25	0.07	0.10	0.16	0.43	1.06	1.78	2.50	2.98	3.02	2.89	2.66	2.36	1.98	1.55	0.82	0.26	0.13	0.08	24.8	24.0
-30	0.06	0.09	0.13	0.22	0.56	1.07	1.56	1.99	2.22	2.25	2.13	1.91	1.52	0.88	0.35	0.16	0.10	0.07	17.3	16.2
-35	0.05	0.08	0.10	0.14	0.22	0.46	0.83	1.17	1.43	1.54	1.47	1.15	0.65	0.33	0.18	0.12	0.09	0.06	10.1	8.67
-40	0.05	0.08	0.10	0.14	0.22	0.46	0.83	1.17	1.43	1.54	1.47	1.15	0.65	0.33	0.18	0.12	0.09	0.06	10.1	8.67
-45	0.05	0.08	0.10	0.14	0.22	0.46	0.83	1.17	1.43	1.54	1.47	1.15	0.65	0.33	0.18	0.12	0.09	0.06	10.1	8.67
横 向 角 度 H (°)																				
Φ总	1.09	1.66	3.32	9.55	19.5	29.3	35.7	38.5	39.4	39.9	38.3	33.4	27.3	20.8	13.6	6.56	2.18	1.19	361	---
Φ有	0.00	0.00	1.25	8.31	18.6	28.6	35.1	38.0	38.8	39.3	37.7	32.8	26.6	20.0	12.5	5.26	0.30	0.00	---	343

半边峰角: U:9.3,D:9.1 , L:13.2,R:13.0 NEMA Beam Type: Type 4

H(β) 角度范围:-90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B) 角度范围:-90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

灯 具 等 光 强 曲 线


实测参数: U:221.9V I:0.0717A P:5.052W PF:0.3178 实检光通:378.168x1 lm		
灯具名称: 691241-4000K-120-5W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

锥面光通量(90度):

356.14 lm
%lum = 94.2%
%lamp = 94.2%

锥面光通量(120度):

370.64 lm
%lum = 98.0%
%lamp = 98.0%

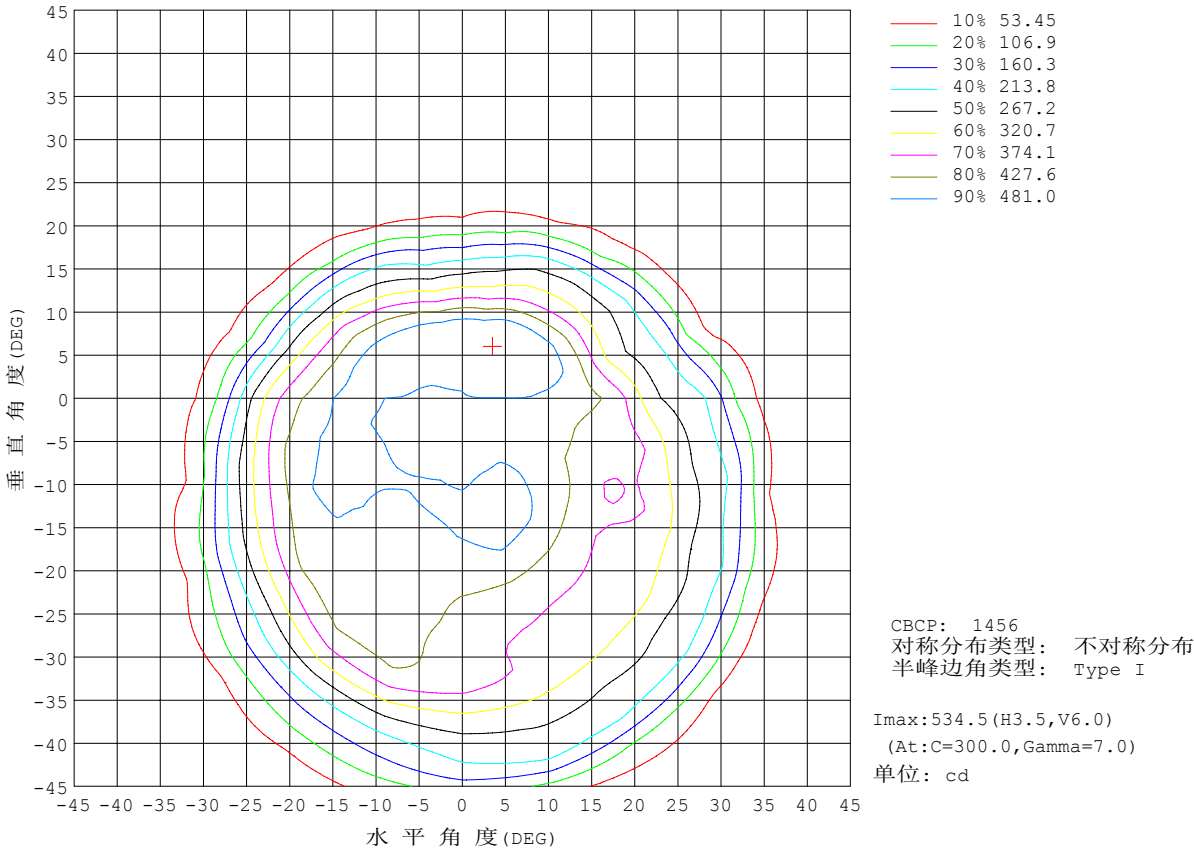


H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.293
环境湿度: 65.0%
测试距离: 6.350米 [K=1.0000]
备注:

平面等照度曲线


实测参数: U:221.9V I:0.0717A P:5.052W PF:0.3178 实检光通:378.168x1 lm		
灯具名称: 691241-4000K-120-5W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

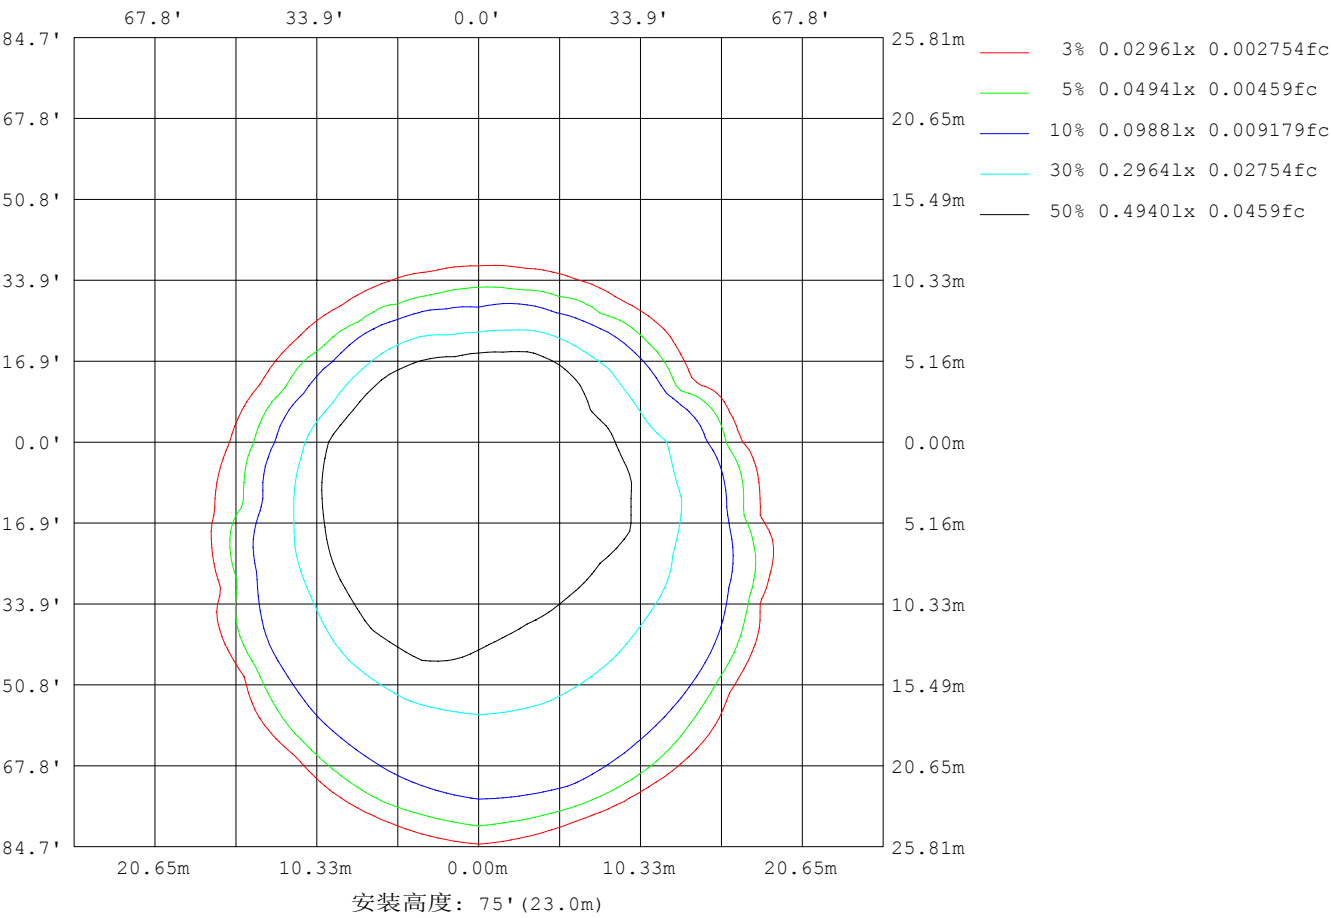

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

平面照度曲线

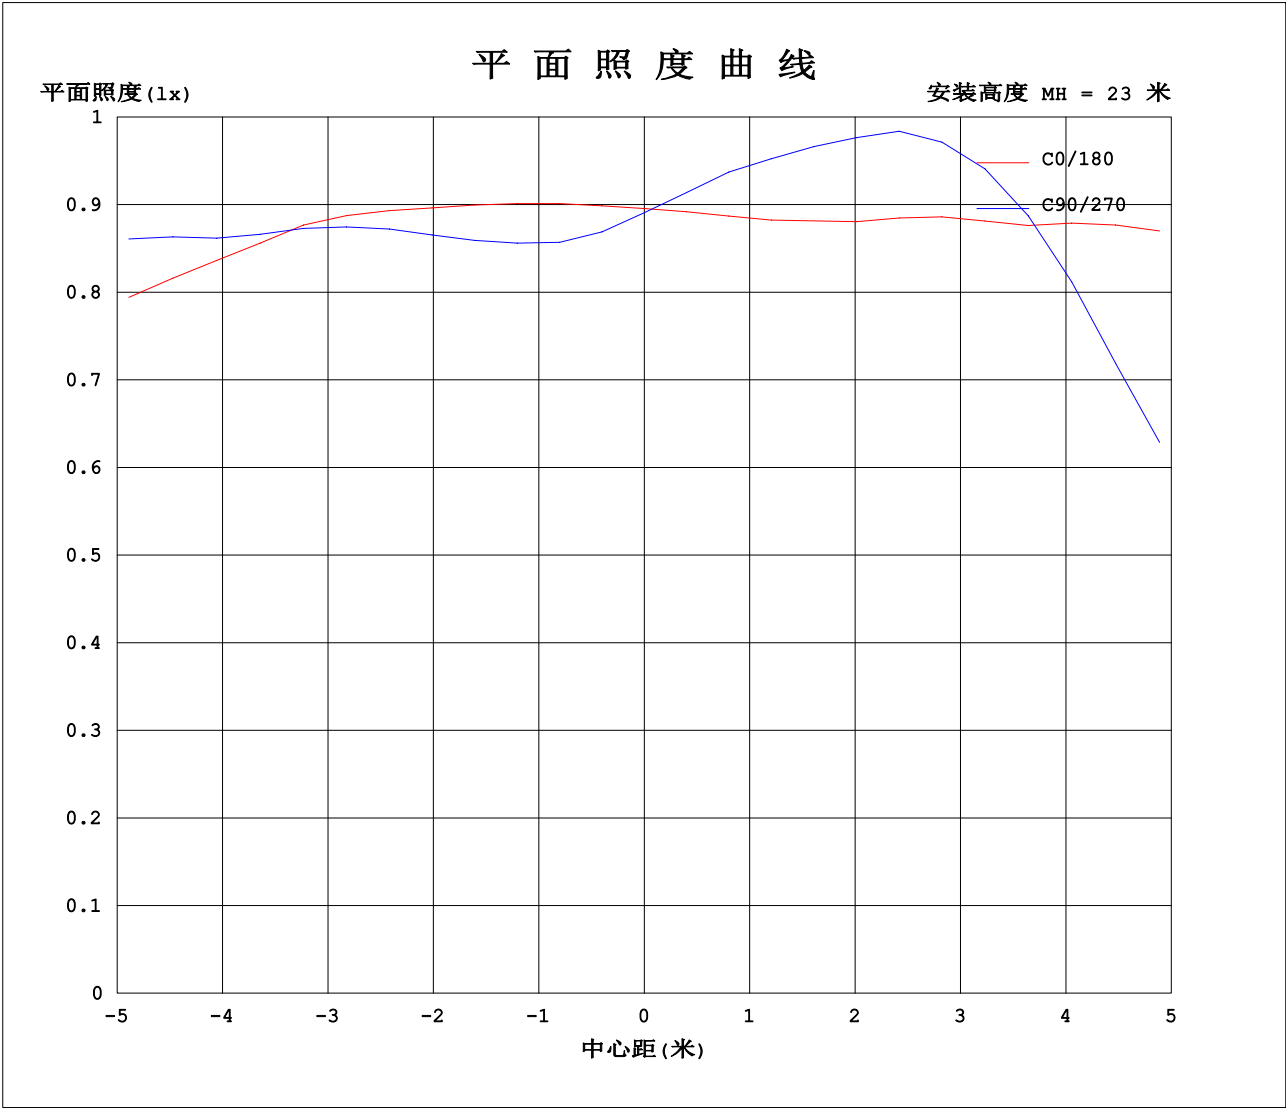


H(β) 角度范围:-90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B) 角度范围:-90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:221.9V I:0.0717A P:5.052W PF:0.3178 实检光通:378.168x1 lm		
灯具名称: 691241-4000K-120-5W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

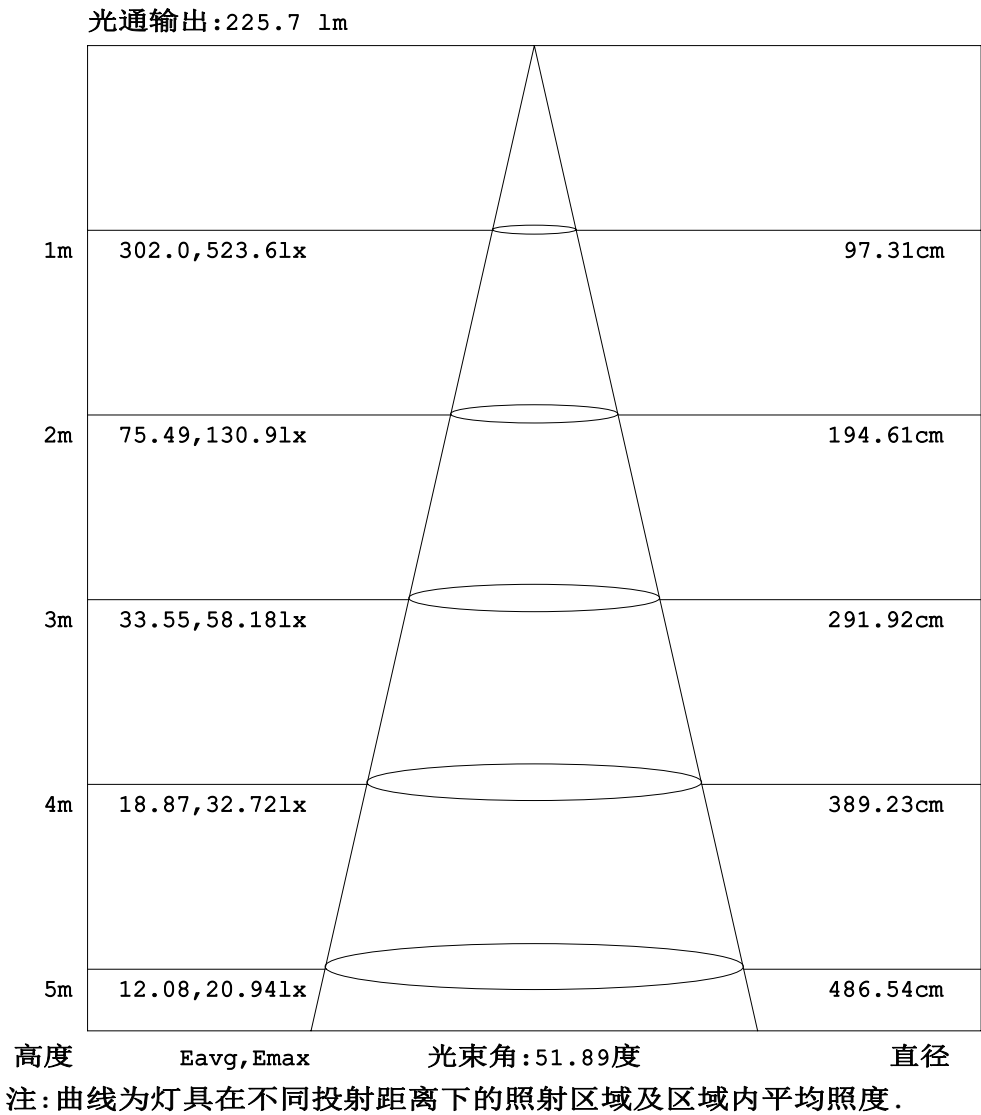

H(β) 角度范围:-90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B) 角度范围:-90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

表--1

光强分布数据表格

单位: cd

H (DEG) V (DEG)	-90	-75	-60	-45	-30	-20	-15	-10	-9	-8	-7	-6	-5	-4	-3
-90		1.06	1.27	1.89	2.75	2.15	1.85	1.80	1.79	1.78	1.77	1.76	1.75	1.74	1.73
-75		1.53	2.31	2.53	2.62	2.59	2.63	2.68	2.68	2.69	2.70	2.71	2.71	2.72	2.72
-60		3.03	3.31	3.51	4.97	8.41	10.56	11.89	12.05	12.20	12.33	12.44	12.55	12.63	12.71
-45		2.74	3.51	5.44	15.34	26.62	44.34	79.46	86.21	92.91	99.51	105.9	112.1	118	123.5
-30		2.59	3.33	11.71	49.38	243.4	358.2	425.2	432.8	438.8	438	433.7	428.9	423.7	418.3
-20		2.63	3.54	13.00	98.10	387.6	464.7	460.1	456.8	453.2	449.6	446.1	443.9	445.4	447.4
-15		2.67	3.65	13.26	119.6	419.3	480.1	465.2	462.5	461.5	463.3	465.4	468	470.7	475.3
-10		2.67	3.73	13.56	106.8	436	495.2	483.6	482.7	482.4	482.4	482.5	483.3	483.6	483.4
-9		2.67	3.74	13.55	102.2	438.6	498.8	485.6	484.3	483.3	482.2	481.4	480.7	479.6	478.7
-8		2.67	3.75	13.52	103.4	439.4	496.5	486.8	485	481.8	479.3	477.4	475.1	473.4	472.8
-7		2.67	3.76	13.46	104.8	439.9	492.7	487.7	484.2	479.6	474.2	470.9	468.6	467.1	467.2
-6		2.66	3.76	13.39	104	438.3	490.3	487.5	482.6	476.8	470.6	465.3	463.3	462.3	462.2
-5		2.66	3.77	13.30	101.3	433.3	488.7	484.6	480.1	474	468.2	463.4	459.3	458.3	457
-4		2.66	3.76	13.19	96.93	427.4	487.2	481.5	477.3	472.2	467.2	463.1	459.1	454.8	452.5
-3		2.65	3.76	13.07	91.05	421.6	484.9	479.3	476.1	473.4	470.4	465.6	459.4	454.9	452.2
-2.5		2.65	3.76	13.00	87.63	418.7	484	479.4	476	474.8	472.7	468.5	462.3	456.3	453.9
-2		2.65	3.76	12.93	83.93	415.7	483.3	480.7	476.9	476.3	475.4	471.9	466.5	460.3	456.5
-1.5		2.65	3.75	12.86	79.99	412.5	482.7	482.1	477.9	477.4	476.7	474.9	471.1	466.3	462.1
-1		2.64	3.75	12.78	75.84	409.2	482	483.6	478.9	478.3	477.6	475.2	472.3	471.9	471.2
-0.5		2.64	3.74	12.70	71.50	405.7	481.3	485.2	479.9	479.2	478.5	475.5	471.7	470.8	472.8
0	0.77	2.64	3.74	12.62	67.01	401.9	480.4	486.9	481.1	480.1	479.4	475.8	471.2	469.8	468.8
0.5		2.65	3.73	12.56	65.01	392.6	474.7	491.4	487.4	485.9	484.3	480.3	475.4	473.3	473.4
1		2.66	3.71	12.50	62.91	382.9	468.9	495.9	493.7	491.8	489.4	485	479.9	477.1	477.8
1.5		2.67	3.70	12.43	60.72	372.9	462.7	500.3	499.8	497.9	494.8	490	485	481.9	481.9
2		2.68	3.68	12.36	58.47	362.5	456.2	504.5	505.8	504.2	500.5	495.3	490.6	487.4	486.4
2.5		2.70	3.67	12.29	56.17	351.8	449.3	508.3	511	509.6	505.9	500.9	496.3	493.4	491.1
3		2.71	3.65	12.21	53.83	340.6	442.1	510.4	513.8	514.3	511.7	507	502	499.2	497.1
4		2.73	3.62	12.05	49.10	317	426.7	510.3	518.3	523.1	523.6	518.5	514.9	512.9	509
5		2.75	3.58	11.86	44.40	291.7	412.9	505	518.3	524.1	525.7	526.2	526	521.8	518.8
6		2.78	3.55	11.66	39.86	267	396.9	490.7	504.3	513.3	520.4	525.9	527.4	526.9	525.6
7		2.80	3.51	11.43	35.59	244.6	376.3	467.9	481.8	492.9	503.4	512.4	517.6	523.3	521.7
8		2.83	3.47	11.17	31.68	220.4	351.6	443.2	456.8	468	477.4	487.2	495.2	502.3	503.9
9		2.85	3.43	10.89	28.48	194.9	322.8	414.7	428.2	438.6	446.9	455.7	463.1	468.2	471.8
10		2.88	3.40	10.57	26.78	168	292.4	382	393.6	402.9	411.3	418.6	424.8	428.3	429.5
15		3.02	3.21	8.08	19.62	56.31	137.6	218.8	225.4	229.4	230.3	230.1	229.1	226.2	233
20		3.19	3.07	6.03	15.04	24.51	34.77	52.54	58.02	63.84	67.26	68.61	68.69	71.48	73.49
30		2.71	3.28	3.77	9.54	12.23	13.51	14.71	14.87	15.00	15.19	15.40	15.58	15.73	15.85
45		1.82	3.50	3.22	3.09	3.42	3.53	3.60	3.64	3.67	3.70	3.72	3.74	3.75	3.76
60		1.15	1.99	3.27	3.08	3.14	3.16	3.15	3.15	3.15	3.14	3.14	3.14	3.14	3.13
75		0.79	0.80	0.92	0.83	0.87	0.88	0.84	0.83	0.83	0.82	0.82	0.81	0.81	0.80
90		0.47	0.31	0.09	0.09	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.10

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

表--2

光强分布数据表格

单位: cd

H (DEG) V (DEG)	-2.5	-2	-1.5	-1	-0.5	0	0.5	1	1.5	2	2.5	3	4	5	6
-90	1.72	1.72	1.71	1.71	1.70	1.69	1.70	1.71	1.72	1.73	1.73	1.74	1.76	1.77	1.79
-75	2.72	2.73	2.73	2.73	2.73	2.73	2.72	2.72	2.71	2.70	2.70	2.69	2.67	2.66	2.64
-60	12.74	12.78	12.80	12.83	12.85	12.87	12.87	12.87	12.86	12.85	12.84	12.83	12.79	12.75	12.69
-45	126.1	128.5	130.9	133.1	135.1	137	136.5	135.7	134.9	133.8	132.6	131.2	127.9	123.9	119.2
-30	415.5	412.6	409.7	406.8	403.9	401	398.4	395.8	393.2	390.6	388.1	385.6	380.5	375.6	370.7
-20	448.4	449.5	450.6	451.7	452.7	453.6	454.1	454.3	454.5	454.5	454.3	453.9	452.4	450	442.5
-15	477.5	479.5	481.4	483.1	484.8	486.5	489.4	492.2	494.9	497.4	499.8	501.9	505.2	498.2	490.8
-10	482.9	481.6	480.4	479.3	478.2	477.3	479.3	481.5	483.8	486.2	488.8	490.2	491.8	493	491.4
-9	478.7	477.9	477.1	476.5	476	475.6	476.8	478.1	479.7	481.4	483.3	484.5	487	489.2	486.1
-8	472.8	472.9	473.1	473.7	474.6	475.6	475.7	476	476.5	477.3	478.4	479.7	482.6	483.4	480.1
-7	467.6	468.3	469.3	470.4	471.7	473.1	473.8	474.6	475.2	475.8	476.4	477.1	478.8	477.7	475.2
-6	462.6	463.1	463.9	465.3	467.1	469.1	469.9	470.8	472	472.9	474	475.3	475.5	473.4	471.3
-5	456.9	457.2	457.9	459.3	461	463.1	463.9	465	466.2	467.5	469	470.5	470.4	469.9	468.8
-4	452.2	452.6	453.5	454.6	456.2	457.9	459	460.3	461.5	462.8	463.9	464.8	465.9	467	466.8
-3	451.8	451.3	451.3	452.1	453.2	454.8	456.3	458	459.6	460.9	461.8	462.7	464.8	465.8	466.4
-2.5	453.2	452.6	451.3	452.4	453.4	454.5	456.4	458.1	459.6	461.2	462.3	463.3	464.9	466.2	467.1
-2	456	455	454.2	453.4	454.1	454.2	456.9	458.7	460.9	462.5	463.9	464.8	466	467.2	467.8
-1.5	459.7	459.2	457.8	456.6	457.5	457	459.6	460.7	463.1	465	466.3	467.1	467.8	468.3	469.2
-1	469.8	466.7	463.9	463.2	460.9	459.9	462.1	464.5	466.6	468.3	469.5	470.2	470.2	471.4	472.9
-0.5	475.9	480.3	480.2	473.9	469.5	465.6	467.2	469.3	471.3	472.6	473.5	474.3	474.8	475.5	476.6
0	469.4	470.1	471.1	472.1	472.9	473.7	474.7	475.6	476.6	477.7	478.2	478.7	479.4	479.6	480.4
0.5	474.3	475.4	476	476.5	476.6	477.5	483.6	489.5	498.4	501.3	498.5	496.8	493.8	492	490.2
1	478.6	479.5	480.5	481.5	482.2	483.7	486.5	491.2	493.1	497.5	502.8	506.5	508	504.1	499.8
1.5	482.7	484.1	485.9	486.6	489.6	490.2	493.9	495	499.3	500.1	501.1	505.1	510.5	512.4	509
2	487.6	489.1	490.3	492.3	496.1	496.7	500.6	500.7	503.2	506.3	506.8	507.8	511.6	513.7	512.7
2.5	492.5	493.6	495.1	497.6	500.1	501.3	505	506.7	508.3	510.5	512.5	513.1	514.1	515.5	514.9
3	496.7	497.9	499.9	502.7	504.4	505.9	509.5	512.2	513.5	515.1	516.8	517.9	518.2	518.2	517.4
4	508.7	509	510.6	512.9	513.6	514.9	517.9	521.1	522.2	523.4	524.6	525.1	527.1	525.6	523.6
5	518.8	519.4	520.6	521.2	521.7	522.6	524.2	526	527.6	528.7	530	531.2	531.7	532.4	529.9
6	525	525.4	526.5	527.3	528.2	529.1	529.7	530.1	530.4	530.8	531.5	532.8	533.7	533.4	533
7	521.5	521.8	523.2	524.5	525.2	525.5	526	526	525.8	525.7	526.6	527.7	530.6	528.2	524.8
8	504.2	505.1	508.1	510.3	511.8	512.5	513.4	513.5	512.9	511.5	511.6	512.6	516	512.7	505.9
9	473.1	477.5	481.7	484.6	486.4	487.1	487.9	487.7	486.5	484.4	482.3	483.7	485.4	483.9	474.6
10	431.4	437	441.7	445.5	448.2	449.8	450.6	450.3	448.9	446.5	443.1	443	444.6	443.3	436.2
15	236	238.6	240.8	242.5	243.7	244.4	247.8	250.7	253.1	255	256.3	257.1	257.5	261.6	264.5
20	74.17	74.64	74.87	74.87	74.63	74.14	76.45	78.50	80.30	81.84	83.13	84.17	85.50	85.85	87.74
30	15.90	15.94	15.97	15.99	16.01	16.01	16.04	16.06	16.07	16.07	16.07	16.05	16.00	15.92	15.80
45	3.76	3.76	3.75	3.75	3.75	3.74	3.75	3.75	3.75	3.75	3.75	3.75	3.74	3.73	3.71
60	3.13	3.13	3.13	3.13	3.13	3.13	3.11	3.09	3.07	3.05	3.03	3.01	2.98	2.94	2.91
75	0.80	0.80	0.79	0.79	0.79	0.78	0.78	0.77	0.77	0.77	0.76	0.76	0.75	0.74	0.73
90	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.09

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

表--3

光强分布数据表格

单位: cd

H (DEG) V (DEG)	7	8	9	10	15	20	30	45	60	75	90				
-90	1.80	1.82	1.84	1.85	1.93	1.83	1.62	2.17	3.19	1.07					
-75	2.63	2.61	2.59	2.57	2.47	2.33	2.11	2.11	1.67	3.43					
-60	12.63	12.55	12.47	12.38	11.49	9.74	6.18	3.17	2.93	1.92					
-45	113.8	107.7	100.8	93.23	52.13	34.57	17.48	7.54	2.54	1.71					
-30	365.8	362.5	361.1	358.2	325.2	274.1	101.5	13.16	3.22	1.97					
-20	432.9	422.9	412.9	403.8	367.8	344.5	213.1	14.89	3.50	2.04					
-15	482.8	474.7	463.6	449.7	381	367.8	219	14.98	3.57	2.07					
-10	484.5	476.3	467	457.1	391.8	374.9	228.8	15.08	3.57	2.06					
-9	480.3	473	463.8	454.1	392.3	375.7	230.3	15.03	3.56	2.05					
-8	475.7	469.5	461	450.9	397.2	378.5	224.5	14.95	3.55	2.04					
-7	471.1	465.8	457.9	448	400.3	383.3	216.9	14.85	3.54	2.03					
-6	468.2	463	455	444.9	401.8	388.6	209.7	14.73	3.52	2.02					
-5	466	460.9	454.3	448.4	402.6	384.6	202.8	14.58	3.50	2.01					
-4	464.6	461.9	457.4	452.1	404.2	375.8	195.9	14.42	3.47	2.00					
-3	465.8	463.4	459.4	454.7	413.7	368	188.8	14.24	3.45	1.99					
-2.5	466.5	464	460.1	456	418.3	364.2	185.2	14.15	3.43	1.99					
-2	467.2	465.4	462.1	457.6	422.8	360.4	181.4	14.05	3.42	1.98					
-1.5	469.9	468.5	464.2	459.2	427.2	356.6	177.4	13.95	3.40	1.97					
-1	473.4	471.6	466.2	460.6	431.4	352.7	173.3	13.84	3.38	1.97					
-0.5	476.8	474.6	468.2	462	435.6	348.5	169	13.73	3.37	1.96					
0	480.2	477.6	470	463.3	439.6	344	164.4	13.62	3.35	1.95	0.81				
0.5	488.2	485.3	478.5	471.8	434.6	336.3	156.6	13.51	3.33	1.95					
1	496.1	492.9	486.8	480	429.3	328.3	148.5	13.40	3.32	1.95					
1.5	504	500.5	495.1	488	423.5	320.1	140.3	13.28	3.30	1.95					
2	510.7	508.1	503.2	495.5	417.2	311.7	132	13.16	3.28	1.94					
2.5	513.6	512.6	510.5	502.5	410	303.1	123.5	13.04	3.26	1.94					
3	516.5	515.7	512.8	505.5	402	294.6	115	12.91	3.24	1.94					
4	522.7	522.1	516.3	505.1	382.8	277.6	98.16	12.63	3.21	1.93					
5	527.5	523.8	515.8	501.7	368.6	261.2	81.65	12.33	3.16	1.93					
6	527.2	518.7	506	492	354.3	249.9	65.86	12.00	3.12	1.92					
7	518	502.5	486.9	470.1	339.9	244.1	51.11	11.64	3.08	1.92					
8	493.1	478.6	461.5	442.5	325	236.4	37.69	11.24	3.03	1.91					
9	461.2	446.4	429.4	411.2	312.7	226.6	27.04	10.80	2.99	1.91					
10	424	410.3	395.3	378.5	297.4	213.3	26.09	10.31	2.94	1.90					
15	265.7	266.2	260.6	251.9	181	98.73	20.42	7.40	2.69	1.88					
20	87.56	84.51	78.22	70.92	49.28	29.69	16.30	5.52	2.47	1.87					
30	15.65	15.52	15.46	15.37	14.46	13.16	10.73	3.49	2.21	1.99					
45	3.69	3.66	3.63	3.60	3.53	3.40	3.04	2.22	1.98	2.50					
60	2.87	2.84	2.81	2.78	2.70	2.73	2.74	2.59	2.25	0.74					
75	0.71	0.70	0.69	0.68	0.62	0.62	0.57	0.42	0.23	0.78					
90	0.09	0.08	0.08	0.08	0.06	0.05	0.02	0.01	0.20	0.42					

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: