

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		9328.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	32.4V x 32.3H
	At 50% of Imax	15.5V x 15.5H
	At 90% of Imax	5.7V x 5.7H
Beam Flux	Total	1001.4 lumens per klm.
	To 10% of Imax	774.6 lumens per klm.
	To 50% of Imax	338.6 lumens per klm.
	To 90% of Imax	0.0 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.1 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.8V I:0.0621A P:3.708W PF:0.2693 Lamp Flux:31.953x1 lm		
NAME: 691261-4000K-10-5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

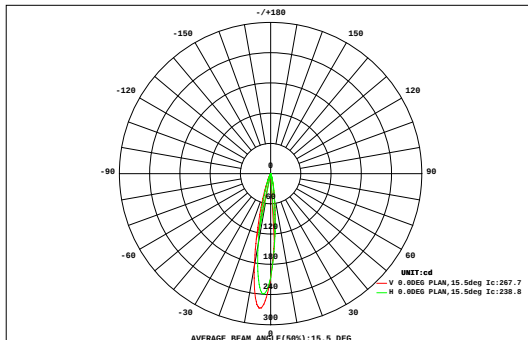

DATA OF LAMP		Eff:8.62lm/W	
MODEL	691261-4000K-10-5W	Imax(cd)	298.1
NOMINAL POWER(W)	5	AVAILABILITY(%)	79.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	25.25
NOMINAL FLUX(lm)	31.953	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	31.95
TEST VOLTAGE(V)	220	θ @50%(H,V)	16,15DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00
27	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.00
24	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.20	0.00
21	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.32	0.00
18	0.01	0.02	0.02	0.03	0.05	0.06	0.07	0.07	0.06	0.05	0.04	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.54	0.04
15	0.01	0.02	0.03	0.05	0.08	0.10	0.13	0.13	0.12	0.09	0.06	0.04	0.02	0.02	0.01	0.01	0.01	0.00	0.93	0.56
12	0.02	0.03	0.05	0.08	0.13	0.18	0.23	0.24	0.21	0.15	0.10	0.06	0.04	0.02	0.01	0.01	0.01	0.00	1.57	1.29
9	0.02	0.04	0.07	0.12	0.19	0.29	0.38	0.41	0.37	0.25	0.15	0.08	0.05	0.03	0.02	0.01	0.01	0.00	2.48	2.23
6	0.02	0.05	0.08	0.15	0.26	0.41	0.56	0.63	0.56	0.34	0.21	0.13	0.07	0.04	0.02	0.01	0.01	0.01	3.57	3.34
3	0.03	0.05	0.09	0.17	0.30	0.47	0.62	0.67	0.62	0.52	0.32	0.18	0.10	0.05	0.03	0.02	0.01	0.01	4.27	4.05
0	0.03	0.05	0.10	0.18	0.31	0.49	0.68	0.79	0.73	0.53	0.33	0.19	0.10	0.05	0.03	0.02	0.01	0.01	4.62	4.41
-3	0.03	0.05	0.09	0.16	0.29	0.46	0.63	0.70	0.62	0.45	0.28	0.17	0.09	0.05	0.03	0.02	0.01	0.01	4.12	3.89
-6	0.02	0.04	0.08	0.13	0.22	0.34	0.45	0.49	0.43	0.31	0.21	0.13	0.07	0.04	0.02	0.01	0.01	0.01	3.02	2.78
-9	0.02	0.03	0.06	0.10	0.15	0.22	0.27	0.29	0.26	0.20	0.14	0.09	0.05	0.03	0.02	0.01	0.01	0.01	1.95	1.68
-12	0.02	0.02	0.04	0.06	0.09	0.13	0.15	0.16	0.14	0.11	0.08	0.06	0.04	0.02	0.01	0.01	0.01	0.00	1.17	0.84
-15	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.08	0.08	0.06	0.05	0.04	0.02	0.02	0.01	0.01	0.01	0.00	0.68	0.16
-18	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.05	0.04	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.40	0.00
-21	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.24	0.00
-24	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	0.27	0.46	0.80	1.37	2.24	3.36	4.40	4.82	4.34	3.18	2.06	1.25	0.73	0.43	0.25	0.16	0.11	0.08	30	---
Φ a	0.00	0.00	0.35	1.07	1.98	3.11	4.17	4.60	4.09	2.92	1.78	0.91	0.29	0.00	0.00	0.00	0.00	0.00	---	25

one-half-peak spread: U:8.3,D:7.3 , L:7.4,R:8.2

NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-09-27

V(B) Range:-90 - 90DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293
 Humidity:65.0%
 Test Distance:6.350m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:221.8V I:0.0621A P:3.708W PF:0.2693 Lamp Flux:31.953x1 lm		
NAME: 691261-4000K-10-5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Conical surface Flux(90deg):

31.682 lm

%lum = 99.0%


%lamp = 99.2%

Conical surface Flux(120deg):

31.988 lm

%lum = 100.0%

%lamp = 100.1%

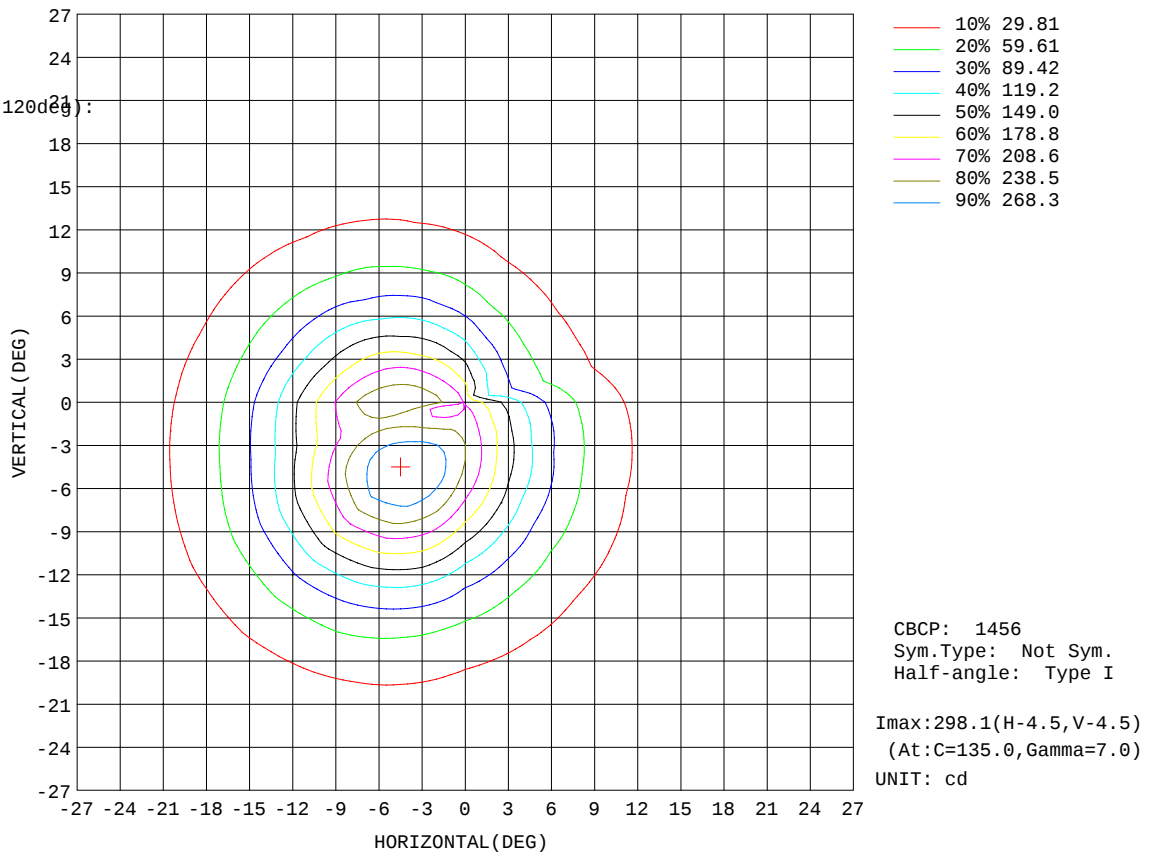H(β) Range:-90 - 90DEGH(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2024-09-27

V(B) Range:-90 - 90DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293


Humidity:65.0%

Test Distance:6.350m [K=1.0000]

Remarks:

ISOLUX DIAGRAM


Test:U:221.8V I:0.0621A P:3.708W PF:0.2693 Lamp Flux:31.953x1 lm		
NAME: 691261-4000K-10-5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

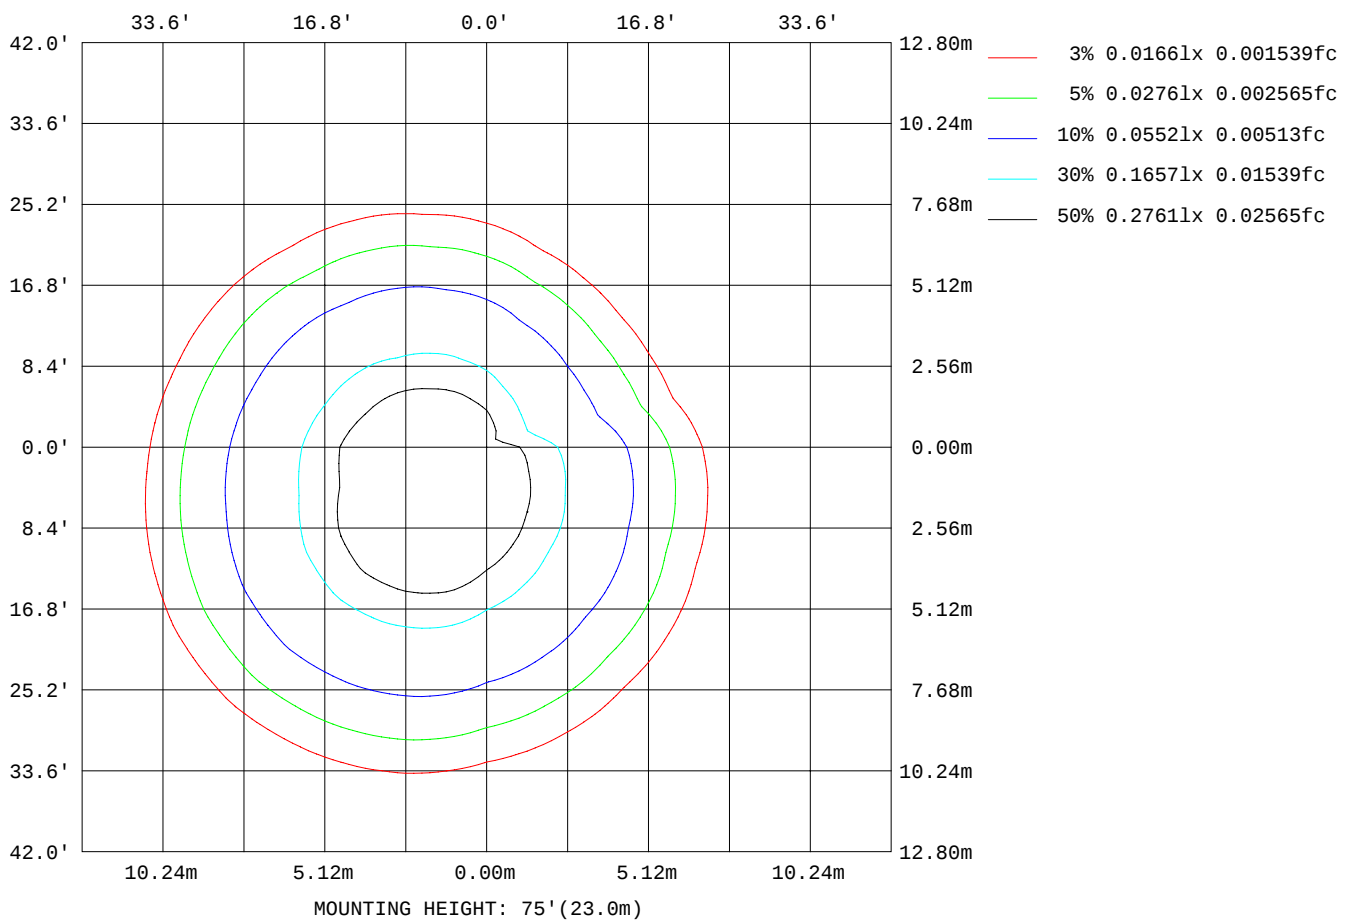

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

V(β) Range:-90 - 90DEG
V(β) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

Planar Illuminance Curve

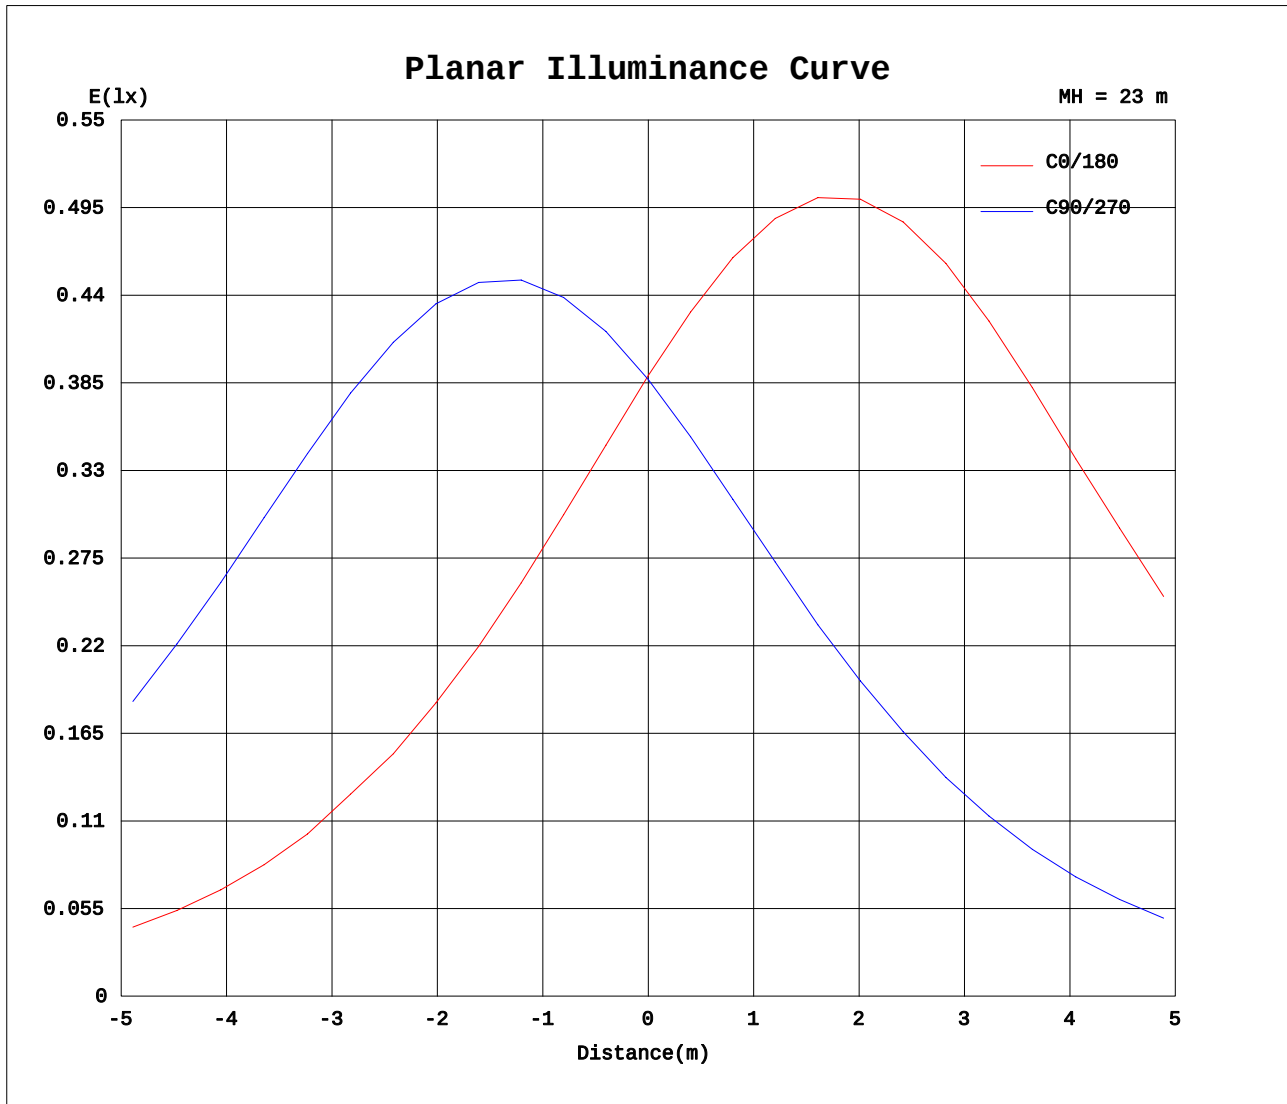


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

V(β) Range:-90 - 90DEG
V(β) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.8V I:0.0621A P:3.708W PF:0.2693 Lamp Flux:31.953x1 lm		
NAME: 691261-4000K-10-5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

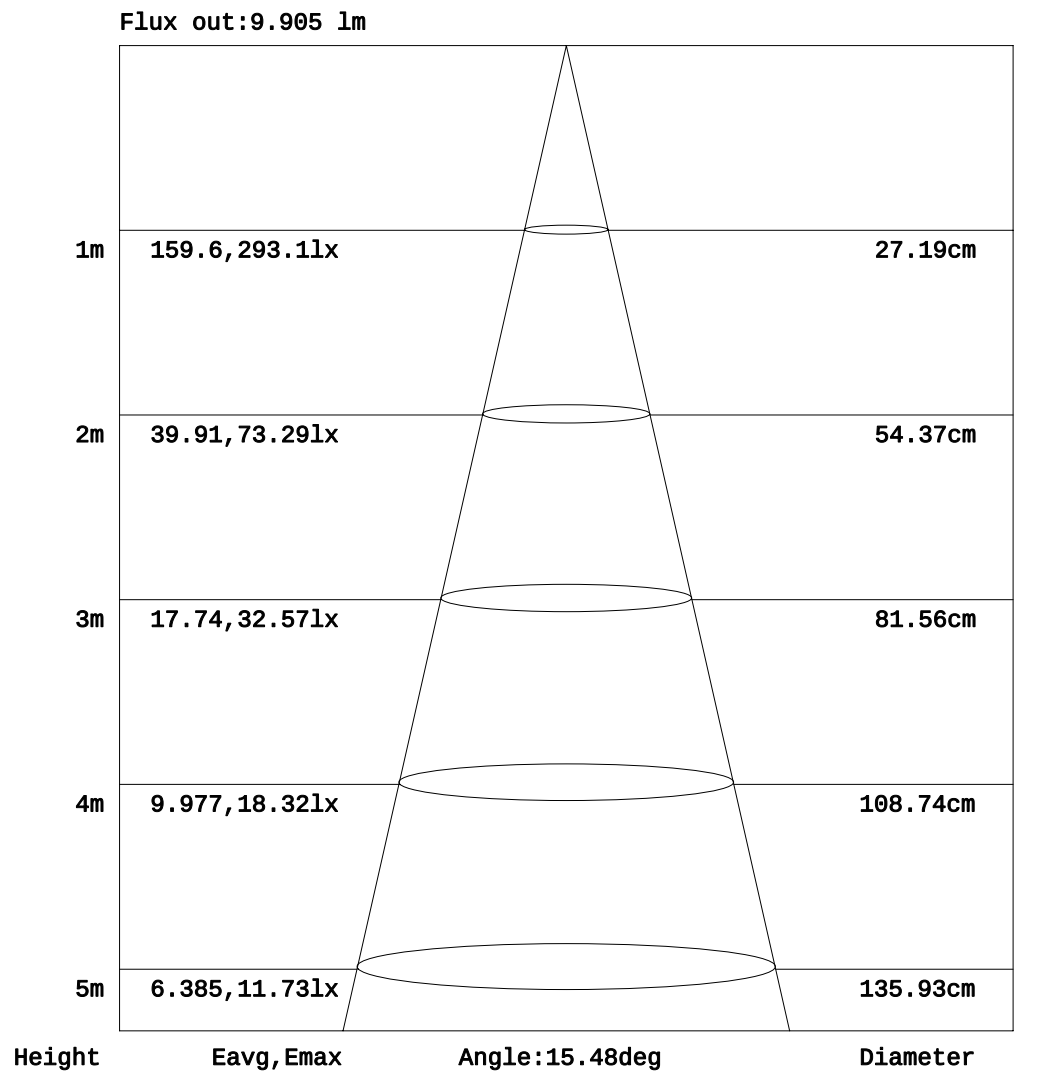

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-27

V(B) Range:-90 - 90DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293
Humidity:65.0%
Test Distance:6.350m [K=1.0000]
Remarks:

Table--1

LUMINOUS DISTRIBUTION INTENSITY DATA

UNIT: cd

H(°) \ V(°)	-90	-75	-60	-45	-30	-20	-15	-10	-9	-8	-7	-6	-5	-4	-3
-90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60		0.00	0.00	0.00	0.06	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.11	0.11
-45		0.00	0.00	0.14	0.55	0.77	0.82	0.84	0.84	0.84	0.84	0.84	0.84	0.83	0.83
-30		0.00	0.00	0.49	1.37	2.42	3.13	3.79	3.88	3.95	3.99	4.00	3.97	3.93	3.86
-20		0.00	0.02	0.76	2.58	8.96	16.00	24.12	25.35	26.46	27.17	27.67	27.84	27.44	26.63
-15		0.00	0.03	0.86	3.46	16.90	37.20	65.62	71.44	75.36	77.45	78.61	79.30	78.77	76.38
-10		0.00	0.04	0.91	4.35	27.11	69.48	146	159.9	171.8	182.3	190.8	194.1	192.9	188.1
-9		0.00	0.04	0.92	4.49	28.74	76.18	160.8	181.6	196.1	207.4	216.8	223	221	214.9
-8		0.00	0.04	0.92	4.59	30.28	80.20	174.2	196.8	218.9	232	242.4	249.1	249	241
-7		0.00	0.04	0.92	4.68	31.44	84.00	186.1	208.9	231.9	255.2	264.8	270.7	274.6	264.3
-6		0.00	0.04	0.92	4.75	32.37	86.34	195.3	218.3	241.5	262.9	282.5	287.5	289	283
-5		0.00	0.04	0.92	4.78	33.05	87.68	196.6	222.4	245.6	265.3	282.8	297.9	295.7	293.7
-4		0.00	0.04	0.92	4.78	33.36	87.89	193.1	217.4	241.2	262.7	276.6	286.7	294.5	289.4
-3		0.00	0.04	0.92	4.76	33.32	88.44	186	208.1	228.6	246.6	261.3	271.3	274.5	275.3
-2.5		0.00	0.04	0.92	4.74	33.16	88.32	184	202.2	221	237.4	250.1	258.6	262.3	261.4
-2		0.00	0.04	0.92	4.71	32.92	87.94	185.4	203.3	216.6	227.6	238.5	244.9	247.6	246.2
-1.5		0.00	0.04	0.91	4.68	32.59	87.29	186.4	205.5	220.4	230	231.3	231.2	231.9	229.8
-1		0.00	0.04	0.91	4.64	32.19	86.40	187	207.4	224.2	236.4	241	236.6	221.8	212.4
-0.5		0.00	0.04	0.91	4.60	31.71	85.25	187.2	208.8	227.8	242.8	251.2	251.9	243.7	225.1
0	0.00	0.00	0.04	0.90	4.55	31.16	83.85	186.9	209.8	230.9	248.9	261.4	267.7	267.1	259.4
0.5		0.00	0.04	0.90	4.50	30.47	81.49	179.5	201.2	221	238	249.7	255.8	255.6	249.1
1		0.00	0.04	0.90	4.45	29.73	78.91	171.6	192.1	210.6	226.5	237.5	243.5	243.8	238.2
1.5		0.00	0.04	0.89	4.40	28.93	76.13	163.4	182.5	199.7	214.6	224.9	230.9	231.4	226.2
2		0.00	0.04	0.89	4.34	28.07	73.18	154.8	172.5	188.5	202.5	212.8	218.4	218.8	213.2
2.5		0.00	0.04	0.89	4.27	27.17	70.07	145.9	162.5	178	191.3	200.8	205.8	205.6	199.4
3		0.00	0.04	0.88	4.20	26.22	66.82	137.7	153.4	167.8	179.9	188.7	192.9	191.7	184.8
4		0.00	0.04	0.87	4.06	24.24	59.99	121.9	134.9	147.1	156.8	163.3	165.3	162.7	160
5		0.00	0.04	0.86	3.89	22.15	53.51	106.2	116.7	126.3	133.6	137.8	138.4	138.9	135.5
6		0.00	0.04	0.85	3.72	20.09	47.34	91.05	99.59	106.2	111.6	114	116.8	116.4	113.1
7		0.00	0.04	0.83	3.54	18.22	41.60	77.20	84.03	88.95	91.33	95.45	97.25	96.20	93.99
8		0.00	0.04	0.82	3.34	16.44	35.93	64.24	69.71	73.65	76.98	78.86	79.98	79.45	77.66
9		0.00	0.03	0.80	3.16	14.66	31.03	52.81	56.45	60.96	63.89	65.18	65.30	64.71	62.90
10		0.00	0.03	0.78	3.00	13.04	26.41	42.97	46.42	49.58	52.03	52.94	53.17	52.44	50.26
15		0.00	0.02	0.68	2.22	6.78	11.15	16.41	17.24	17.79	18.32	18.44	18.29	17.76	17.50
20		0.00	0.00	0.54	1.62	3.43	4.98	6.40	6.58	6.72	6.75	6.72	6.66	6.64	6.55
30		0.00	0.00	0.25	0.88	1.27	1.44	1.55	1.56	1.55	1.56	1.57	1.57	1.56	1.55
45		0.00	0.00	0.00	0.14	0.24	0.28	0.31	0.32	0.32	0.32	0.32	0.32	0.32	0.32
60		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2024-09-27

V(B) Range:-90 - 90DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293

Humidity:65.0%

Test Distance:6.350m [K=1.0000]

Remarks:

Table--2

LUMINOUS DISTRIBUTION INTENSITY DATA

UNIT: cd

H(°) \ V(°)	-2.5	-2	-1.5	-1	-0.5	0	0.5	1	1.5	2	2.5	3	4	5	6
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.11	0.11	0.11	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.08	0.08	0.07	0.06
-45	0.82	0.82	0.82	0.81	0.81	0.80	0.80	0.79	0.79	0.78	0.78	0.77	0.76	0.74	0.72
-30	3.81	3.76	3.71	3.65	3.59	3.53	3.48	3.44	3.39	3.34	3.29	3.24	3.12	2.99	2.86
-20	26.10	25.47	24.78	24.01	23.17	22.29	21.74	21.14	20.51	19.84	19.14	18.42	16.91	15.36	13.89
-15	74.73	72.80	70.59	68.12	65.41	62.48	60.18	57.71	55.11	52.40	49.62	46.81	41.22	36.46	31.82
-10	183.9	177.4	170	162	153.2	143.8	137.4	130.5	123.2	115.7	108	100.9	87.25	74.15	62.21
-9	210.6	203.4	195	185.7	175.7	165	157.1	148.7	139.9	130.9	121.9	113.8	97.32	81.72	69.82
-8	235.9	229.2	219.5	209	197.6	185.6	176.4	166.6	156.5	145.9	136.1	126.4	107	90.21	76.36
-7	258.2	251.5	241.6	230.1	217.8	204.8	194.4	183.4	171.9	160.2	149	137.7	115.6	98.72	82.95
-6	275.7	268.2	259.5	247.2	234.3	220.8	209.1	196.8	184.1	171.7	159.1	146.4	124.4	105.6	88.05
-5	286.5	278	269.7	258.5	245.7	232.6	220	206.9	193.4	179.7	165.9	152.8	131.1	110.4	91.54
-4	286.5	279.9	271	262.4	250.5	238.8	225.7	212.1	198	183.5	169.9	158	134.3	112.6	92.61
-3	271.8	269.1	264.3	256.2	247.6	238.8	225.9	212.3	197.7	184.4	172	159	134.2	111.1	92.66
-2.5	260.9	257.9	257.5	249.7	242.6	235.6	223.4	210.3	196.5	184.3	171.3	158	132.6	111.1	92.75
-2	244.8	244.5	242.6	241.4	236.3	232.5	220.9	207.4	195.1	183.1	169	155.3	131.4	110.8	92.05
-1.5	228.5	226.2	226.1	228	226.5	226.7	216.1	204.3	192.9	178.5	164.4	152.6	130	109.4	90.58
-1	209.6	207.3	205.9	207.6	214.6	220.9	211.3	200.6	186.4	173.7	162.1	150.4	127.2	106.9	88.41
-0.5	210.7	192.4	183.8	182.5	188.8	212.8	206.6	193.1	181.9	170.2	157.6	145.5	122.8	103.2	85.49
0	252.6	245.7	236.5	227.3	216.7	206.2	194.6	183.1	171.7	160.2	149	137.9	117	98.62	81.89
0.5	243.5	238.2	230.1	221.5	211.9	195.3	152.1	133.3	120.8	114.1	113.9	110.2	98.90	86.39	73.13
1	233.2	227.1	219.7	210.9	200.8	185.9	159.1	135.4	121	109.8	101.1	92.88	80.68	73.81	64.09
1.5	221.9	214.9	207.8	199.7	188	175.6	152.5	137.3	119.4	108.3	98.13	90.23	76.23	64.49	55.00
2	208.2	202	195.6	187.5	176.1	165.3	144.6	132.6	118.5	105.1	95.84	87.32	73.28	61.93	51.58
2.5	194	189.7	183.7	174.8	164.9	155.1	138.1	125.2	113.5	102.4	91.97	83.90	70.15	58.98	49.50
3	181.9	177.3	170.9	162.4	153.9	144.8	130.5	117.7	107.9	98.15	88.59	80.19	67.47	55.93	47.09
4	156.7	152.1	145.7	138.2	131.9	124.3	113.8	102.6	94.98	87.55	80.17	73.36	60.51	50.82	42.49
5	132.3	128.1	122.5	117.5	112.2	105.9	98.07	89.71	82.17	76.51	70.52	64.47	54.23	44.81	37.99
6	110.3	106.4	102	98.54	94.30	89.34	83.64	77.45	70.88	65.79	61.02	56.21	47.61	40.02	33.35
7	91.47	88.04	85.08	82.00	78.41	74.34	69.79	64.89	59.74	54.98	51.61	48.10	40.93	35.09	29.53
8	75.76	73.46	71.22	68.47	65.26	61.65	58.14	54.37	50.41	46.35	43.38	40.73	35.17	30.25	25.69
9	61.34	59.99	58.29	56.12	53.55	50.65	48.03	45.21	42.23	39.13	36.21	34.17	29.89	25.84	22.31
10	48.93	48.00	46.77	45.27	43.52	41.55	39.54	37.37	35.09	32.72	30.31	28.50	25.29	22.07	19.14
15	17.27	16.97	16.60	16.17	15.69	15.16	14.64	14.09	13.50	12.89	12.25	11.60	10.28	9.39	8.48
20	6.47	6.38	6.27	6.14	6.01	5.86	5.72	5.57	5.41	5.24	5.07	4.89	4.52	4.14	3.85
30	1.54	1.53	1.52	1.51	1.50	1.49	1.47	1.46	1.45	1.43	1.42	1.40	1.37	1.33	1.29
45	0.31	0.31	0.31	0.31	0.31	0.30	0.30	0.30	0.30	0.30	0.29	0.29	0.29	0.28	0.27
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2024-09-27

V(B) Range:-90 - 90DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293

Humidity:65.0%

Test Distance:6.350m [K=1.0000]

Remarks:

Table--3

LUMINOUS DISTRIBUTION INTENSITY DATA

UNIT: cd

H(°) \ V(°)	7	8	9	10	15	20	30	45	60	75	90				
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
-60	0.06	0.05	0.04	0.04	0.01	0.00	0.00	0.00	0.00	0.00					
-45	0.71	0.69	0.67	0.65	0.53	0.40	0.19	0.00	0.00	0.00					
-30	2.72	2.58	2.45	2.32	1.74	1.34	0.76	0.12	0.00	0.00					
-20	12.48	11.15	9.86	8.68	4.70	2.63	1.16	0.20	0.00	0.00					
-15	27.55	23.46	20.21	17.39	7.92	3.70	1.33	0.23	0.00	0.00					
-10	52.79	44.49	37.16	30.77	11.65	4.81	1.46	0.27	0.00	0.00					
-9	58.90	48.93	40.53	33.50	12.26	5.02	1.48	0.28	0.00	0.00					
-8	64.22	53.05	43.74	35.83	12.95	5.21	1.50	0.28	0.00	0.00					
-7	68.73	56.77	46.46	37.70	13.66	5.35	1.52	0.29	0.00	0.00					
-6	72.92	59.29	48.15	38.84	14.13	5.47	1.53	0.29	0.00	0.00					
-5	75.34	61.20	49.30	40.34	14.49	5.56	1.54	0.29	0.00	0.00					
-4	75.19	62.57	50.92	41.43	14.67	5.59	1.54	0.29	0.00	0.00					
-3	76.72	63.09	51.44	41.71	14.68	5.58	1.54	0.29	0.00	0.00					
-2.5	76.64	62.74	51.06	41.49	14.59	5.55	1.53	0.29	0.00	0.00					
-2	75.95	62.04	50.51	41.07	14.45	5.51	1.53	0.29	0.00	0.00					
-1.5	74.88	61.03	49.67	40.39	14.25	5.45	1.52	0.29	0.00	0.00					
-1	73.34	59.59	48.52	39.48	14.00	5.39	1.52	0.29	0.00	0.00					
-0.5	71.27	57.74	47.08	38.35	13.70	5.31	1.51	0.29	0.00	0.00					
0	68.69	55.54	45.39	37.02	13.36	5.22	1.50	0.29	0.00	0.00	0.00				
0.5	62.15	51.03	42.14	34.64	12.83	5.09	1.49	0.29	0.00	0.00					
1	55.34	46.32	38.74	32.13	12.27	4.95	1.48	0.29	0.00	0.00					
1.5	48.48	41.52	35.24	29.55	11.68	4.80	1.46	0.28	0.00	0.00					
2	42.94	36.73	31.70	26.94	11.07	4.65	1.45	0.28	0.00	0.00					
2.5	41.34	34.38	28.53	24.33	10.44	4.49	1.43	0.28	0.00	0.00					
3	39.50	32.99	27.45	22.78	9.81	4.33	1.41	0.27	0.00	0.00					
4	35.31	29.75	24.96	20.92	8.54	3.99	1.38	0.26	0.00	0.00					
5	31.99	26.75	22.41	18.88	7.88	3.64	1.34	0.26	0.00	0.00					
6	28.31	23.81	20.14	16.90	7.27	3.36	1.30	0.25	0.00	0.00					
7	24.63	21.14	17.96	15.14	6.67	3.17	1.26	0.24	0.00	0.00					
8	21.88	18.42	15.70	13.47	6.04	3.00	1.21	0.23	0.00	0.00					
9	19.15	16.16	13.76	11.88	5.49	2.81	1.17	0.22	0.00	0.00					
10	16.54	14.22	12.16	10.33	4.98	2.63	1.14	0.21	0.00	0.00					
15	7.63	6.77	6.04	5.36	3.01	1.89	0.96	0.15	0.00	0.00					
20	3.58	3.32	3.06	2.83	1.93	1.40	0.75	0.10	0.00	0.00					
30	1.25	1.21	1.18	1.15	0.97	0.78	0.38	0.01	0.00	0.00					
45	0.26	0.26	0.25	0.24	0.18	0.13	0.03	0.00	0.00	0.00					
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2024-09-27

V(B) Range:-90 - 90DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.293

Humidity:65.0%

Test Distance:6.350m [K=1.0000]

Remarks: