

投光灯具参数概要:


报告中的参数折算为光源光通为1000lm条件下.

最大光强		1986.6 cd/1000lm.
(Luminaire orientation as tested.)		0.0 度 (垂直)
		0.0 度 (水平)
光束角	10% Imax	60.1V x 60.1H
	50% Imax	45.4V x 45.4H
	90% Imax	34.5V x 34.3H
光束内光通	总计	1000.3 lm/1000lm.
	至 10% Imax	948.0 lm/1000lm.
	至 50% Imax	763.5 lm/1000lm.
	至 90% Imax	436.4 lm/1000lm
上射 LOR		0.0 %
下射 LOR		100.0 %
灯具效率(光输出比)		100.0 %

H(β)角度范围:-90度 - 90度	V(B)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度	V(B)角度间隔: 0.5度
测试速度: 快速	测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境温度:25.3℃	环境湿度:65.0%
测试人员:	测试距离:6.350米 [K=1.0000]
测试日期:2024-09-27	备注:

灯 具 光 度 数 据

实测参数: U:221.8V I:0.0621A P:3.708W PF:0.2690 实检光通:92.9638x1 lm		
灯具名称: 691261-4000K-60-5W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

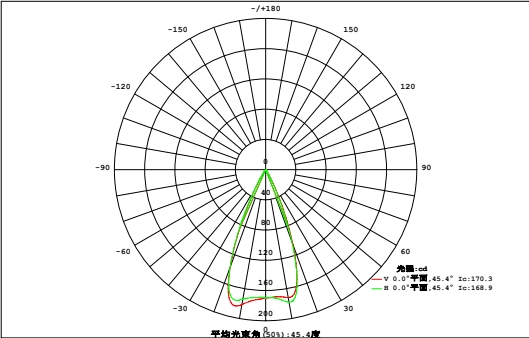

光源 数 据		光度数据 光效:25.07lm/W	
型号	691261-4000K-60-5W	峰值光强(cd)	184.7
标称功率(W)	5	有效效率(%)	94.8
额定电源电压(V)	220	有效光通(lm)	88.12
额定光通量(lm)	92.9638	灯具效率(%)	100.0
灯具内光源数(只)	1	总光通量(lm)	92.96
实测电源电压(V)	220	50%光束角(H,V)	45°,45°

45 40 35 30 25 20 15 10 5 0 -5 -10 -15 -20 -25 -30 -35 -40 -45	区 域 光 通 量																单位:lm		Φ总	Φ有	
	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.08	0.00	
	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.15	0.00	
	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.33	0.00	
	0.00	0.01	0.01	0.02	0.03	0.06	0.11	0.15	0.18	0.17	0.12	0.07	0.04	0.02	0.01	0.01	0.00	0.00	1.02	0.48	
	0.00	0.01	0.01	0.03	0.08	0.19	0.34	0.46	0.52	0.49	0.37	0.23	0.11	0.04	0.02	0.01	0.01	0.00	2.93	2.62	
	0.01	0.01	0.02	0.07	0.20	0.44	0.72	0.92	1.00	0.96	0.79	0.53	0.27	0.11	0.04	0.01	0.01	0.00	6.11	5.86	
	0.01	0.01	0.04	0.14	0.39	0.77	1.10	1.27	1.32	1.29	1.16	0.87	0.50	0.21	0.07	0.02	0.01	0.01	9.18	8.97	
	0.01	0.02	0.06	0.21	0.57	1.03	1.31	1.36	1.34	1.33	1.31	1.11	0.73	0.34	0.11	0.03	0.01	0.01	10.9	10.7	
	0.01	0.02	0.07	0.27	0.70	1.16	1.36	1.34	1.30	1.29	1.30	1.22	0.91	0.48	0.17	0.04	0.01	0.01	11.7	11.5	
	0.01	0.02	0.08	0.30	0.75	1.19	1.35	1.32	1.29	1.29	1.28	1.25	0.97	0.53	0.19	0.05	0.02	0.01	11.9	11.7	
	0.01	0.02	0.07	0.28	0.70	1.14	1.34	1.33	1.31	1.30	1.30	1.20	0.88	0.46	0.16	0.04	0.01	0.01	11.6	11.4	
	0.01	0.02	0.06	0.21	0.55	0.97	1.26	1.35	1.35	1.33	1.27	1.06	0.70	0.33	0.11	0.03	0.01	0.01	10.6	10.4	
	0.01	0.01	0.04	0.12	0.34	0.68	0.98	1.17	1.23	1.19	1.03	0.77	0.45	0.19	0.06	0.02	0.01	0.01	8.32	8.09	
	0.01	0.01	0.02	0.06	0.16	0.35	0.57	0.76	0.82	0.77	0.63	0.41	0.22	0.09	0.03	0.01	0.01	0.00	4.93	4.65	
	0.00	0.01	0.01	0.03	0.06	0.13	0.23	0.33	0.36	0.34	0.26	0.16	0.08	0.04	0.02	0.01	0.01	0.00	2.06	1.69	
	0.00	0.01	0.01	0.01	0.02	0.04	0.07	0.10	0.11	0.10	0.08	0.05	0.03	0.02	0.01	0.01	0.00	0.00	0.65	0.09	
	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.23	0.00	
	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.11	0.00	
	-45	-40	-35	-30	-25	-20	-15	-10	横 向 角 度H(°)				10	15	20	25	30	35	40	45	
Φ总	0.09	0.18	0.52	1.78	4.62	8.20	10.8	12.0	12.3	11.9	11.0	9.01	5.94	2.89	1.02	0.32	0.13	0.07	93	---	
Φ有	0.00	0.00	0.05	1.41	4.33	7.95	10.6	11.7	12.0	11.7	10.7	8.77	5.67	2.57	0.55	0.00	0.00	0.00	---	88	

半边峰角: U:11.2,D:10.3 , L:10.9,R:10.7 NEMA Beam Type: Type 4

H(β) 角度范围:-90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B) 角度范围:-90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

灯 具 等 光 强 曲 线


实测参数: U:221.8V I:0.0621A P:3.708W PF:0.2690 实检光通:92.9638x1 lm		
灯具名称: 691261-4000K-60-5W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

锥面光通量(90度):

92.544 lm
%lum = 99.5%
%lamp = 99.5%

锥面光通量(120度):

92.988 lm
%lum = 100.0%
%lamp = 100.0%

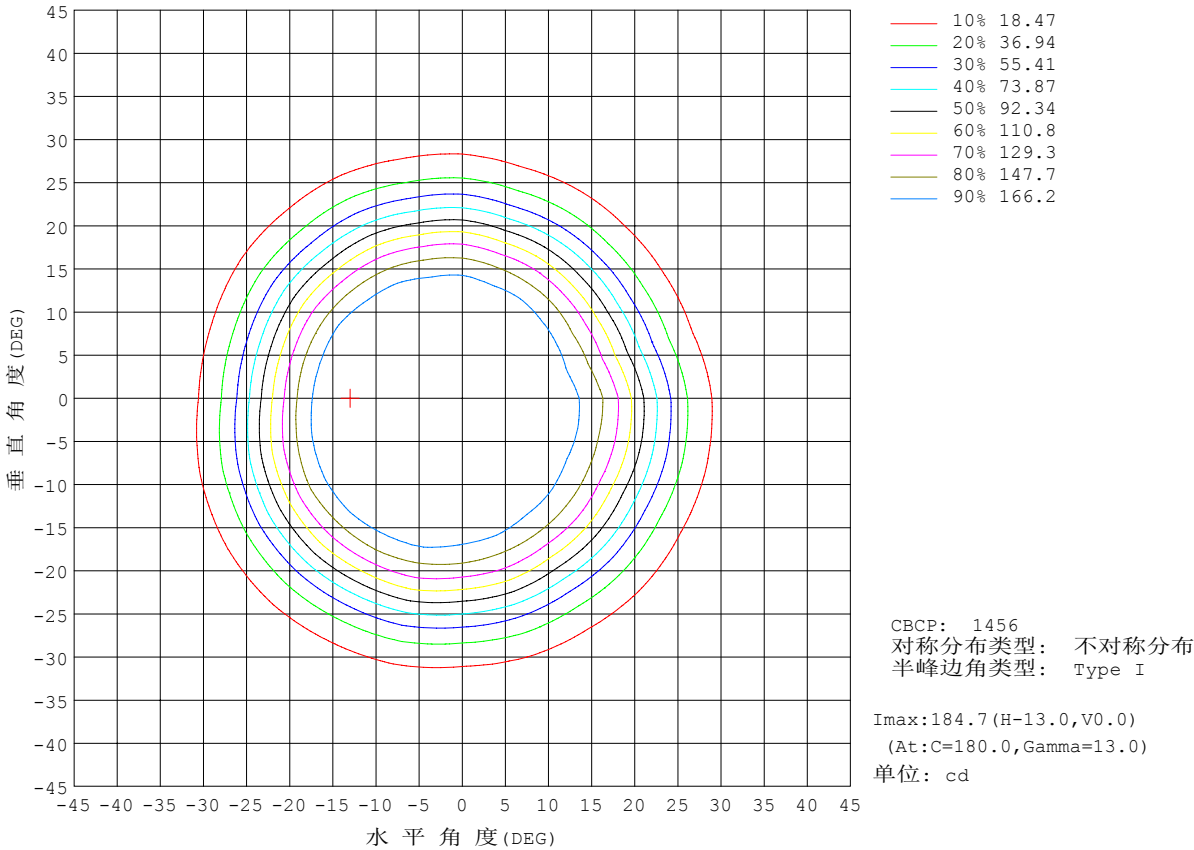


H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

平面等照度曲线


实测参数: U:221.8V I:0.0621A P:3.708W PF:0.2690 实检光通:92.9638x1 lm		
灯具名称: 691261-4000K-60-5W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

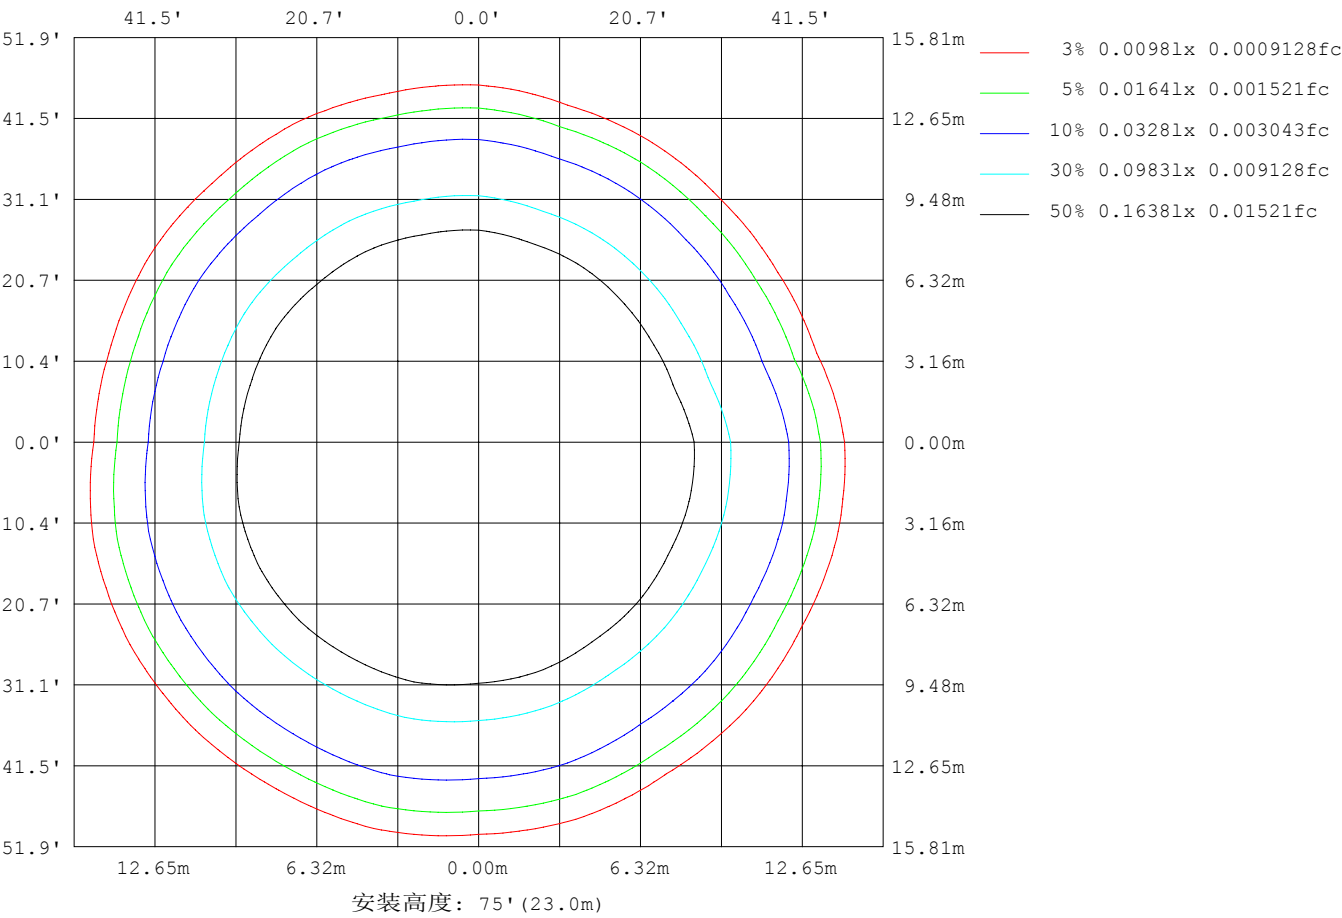

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:


平面照度曲线

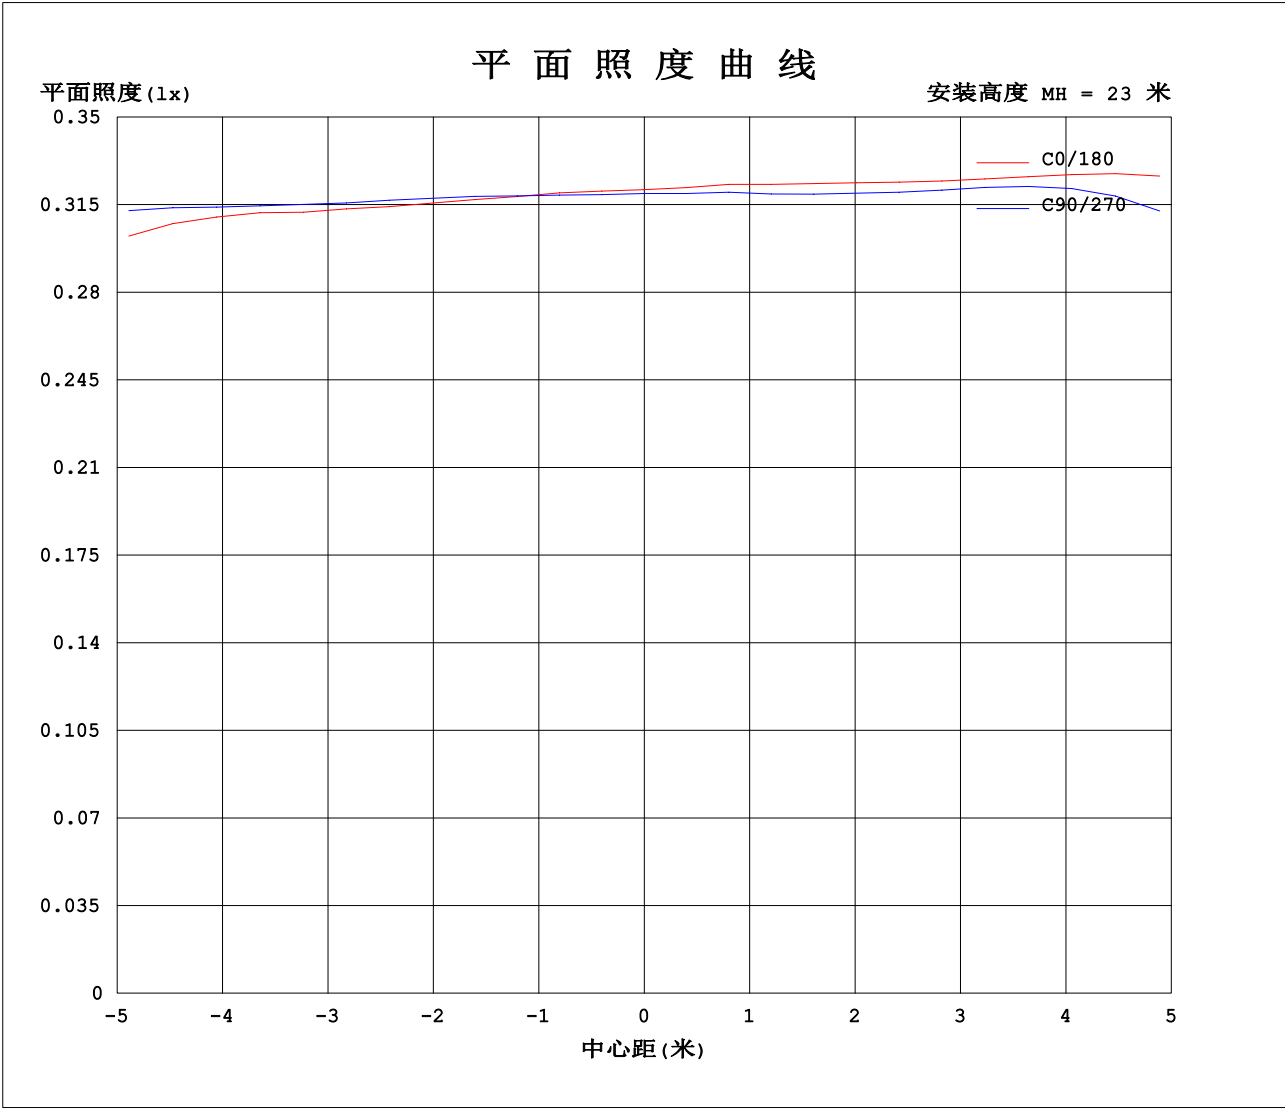

H(β) 角度范围: -90度 - 90度	V(B) 角度范围: -90度 - 90度
H(β) 角度间隔: 0.5度	V(B) 角度间隔: 0.5度
测试速度: 快速	测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.0.293
环境温度: 25.3℃	环境湿度: 65.0%
测试人员:	测试距离: 6.350米 [K=1.0000]
测试日期: 2024-09-27	备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:221.8V I:0.0621A P:3.708W PF:0.2690 实检光通:92.9638x1 lm		
灯具名称: 691261-4000K-60-5W	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商:	发光口面:	遮光角:

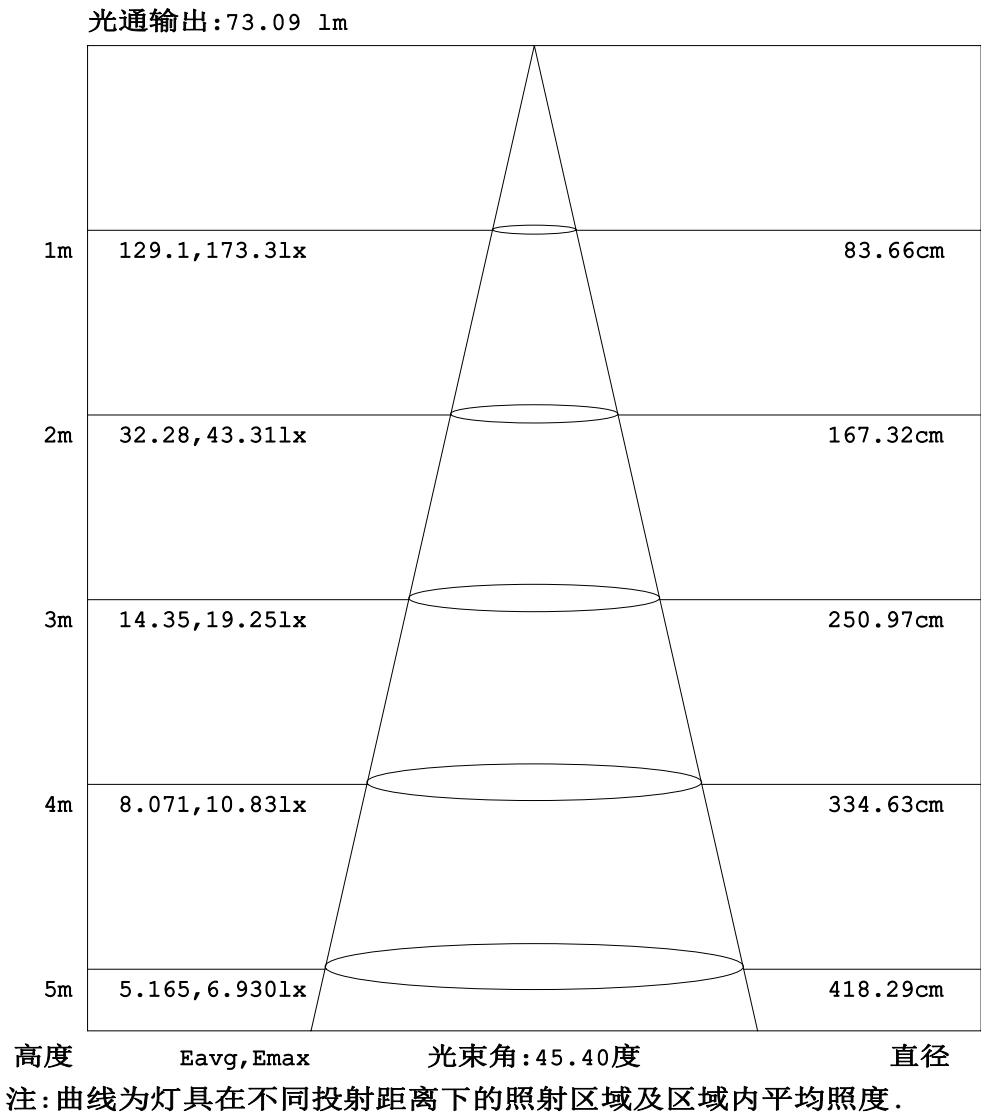

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

表--1

光强分布数据表格

单位: cd

H (DEG) V (DEG)	-90	-75	-60	-45	-30	-20	-15	-10	-9	-8	-7	-6	-5	-4	-3
-90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60		0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05
-45		0.00	0.00	0.06	0.44	0.84	1.00	1.12	1.13	1.14	1.15	1.16	1.16	1.16	1.16
-30		0.00	0.00	0.45	2.04	6.64	12.36	19.98	21.42	22.77	23.91	24.68	25.21	25.51	25.60
-20		0.00	0.00	0.84	6.74	49.78	88.22	121.1	126.2	130.4	134.2	137.1	139	139.6	140
-15		0.00	0.00	1.00	12.32	89.30	138.7	168.1	170.8	173.2	174.7	175.9	176.6	177	176.7
-10		0.00	0.01	1.09	19.06	122.8	169.7	181.1	180.6	179.9	178.8	177.7	176.6	175.7	174.9
-9		0.00	0.01	1.10	20.25	127.4	172.7	181	180.1	178.9	177.6	176.4	175.3	174.4	173.7
-8		0.00	0.01	1.11	21.07	131.3	175.1	180.6	179.3	177.8	176.4	175.2	174.2	173.3	172.7
-7		0.00	0.01	1.12	21.86	134.8	176.5	180	178.4	176.8	175.4	174.2	173.3	172.6	172
-6		0.00	0.01	1.12	22.42	137.3	177.8	179.4	177.7	176	174.6	173.5	172.6	171.9	171.4
-5		0.00	0.01	1.12	22.77	138.6	178.7	179	177	175.3	174	172.9	172	171.4	170.8
-4		0.00	0.00	1.12	22.89	139.3	179.2	178.7	176.6	174.9	173.5	172.5	171.6	171.1	170.6
-3		0.00	0.00	1.12	22.82	139.7	179.7	178.5	176.4	174.6	173.2	172.1	171.2	170.8	170.3
-2.5		0.00	0.00	1.12	22.70	139.7	180	178.6	176.3	174.5	173.1	172	171.1	170.6	170
-2		0.00	0.00	1.11	22.55	139.6	180.2	179	176.7	174.6	173.1	171.9	171	170.4	169.8
-1.5		0.00	0.00	1.11	22.34	139.4	180.4	179.4	177.2	175.2	173.5	171.9	171	170.3	169.7
-1		0.00	0.00	1.10	22.09	139	180.5	179.9	177.8	175.8	174.1	172.6	171.5	170.3	169.6
-0.5		0.00	0.00	1.10	21.80	138.5	180.7	180.5	178.4	176.5	174.8	173.4	172.3	171.3	170.3
0	0.00	0.00	0.00	1.09	21.47	137.9	180.7	181.1	179.1	177.2	175.5	174.3	173.2	172.4	171.6
0.5		0.00	0.00	1.09	21.33	137.3	180.4	181.2	179.2	177.2	175.5	174.3	173.2	172.3	171.6
1		0.00	0.00	1.09	21.15	136.6	180	181.3	179.3	177.3	175.6	174.3	173.1	172.3	171.6
1.5		0.00	0.00	1.09	20.93	135.8	179.5	181.5	179.4	177.5	175.7	174.4	173.2	172.2	171.5
2		0.00	0.00	1.08	20.67	134.7	178.9	181.7	179.7	177.7	175.8	174.4	173.1	172.1	171.5
2.5		0.00	0.00	1.08	20.38	133.6	178.3	181.9	179.9	177.9	175.9	174.4	173.1	172.1	171.4
3		0.00	0.00	1.07	20.05	132.2	177.5	182.1	180.1	178	176.1	174.5	173.2	172.2	171.5
4		0.00	0.00	1.06	19.30	129.1	175.7	182.4	180.6	178.6	176.6	175	173.8	172.8	171.7
5		0.00	0.00	1.05	18.40	125.3	173.8	182.6	181.1	179.3	177.6	176	174.7	173.4	172.4
6		0.00	0.00	1.03	17.39	121.1	171.2	182.7	181.7	180.3	178.7	177.2	175.7	174.4	173.5
7		0.00	0.00	1.01	16.25	116.3	167.8	182.4	182	181	179.9	178.4	177	175.7	175
8		0.00	0.00	0.99	15.01	110.9	163.9	181.3	181.8	181.4	180.5	179.5	178.2	177.3	176.7
9		0.00	0.00	0.97	13.89	105	158	179.3	180.5	181.1	180.7	180.1	179.3	178.7	178.1
10		0.00	0.00	0.94	12.82	98.58	150.8	176.4	178.2	179.5	180	180	179.7	179.3	178.9
15		0.00	0.00	0.79	7.66	60.93	105.4	141.2	145.9	149.8	153.1	155.7	157.3	158.1	159.5
20		0.00	0.00	0.61	4.18	27.52	54.50	81.73	85.74	89.31	92.29	94.71	96.79	98.98	100.5
30		0.00	0.00	0.25	1.55	3.68	6.07	8.82	9.27	9.66	10.19	10.67	11.05	11.34	11.53
45		0.00	0.00	0.00	0.24	0.55	0.68	0.79	0.81	0.82	0.84	0.85	0.85	0.86	0.86
60		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

表--2

光强分布数据表格

单位: cd

H (DEG) V (DEG)	-2.5	-2	-1.5	-1	-0.5	0	0.5	1	1.5	2	2.5	3	4	5	6
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04
-45	1.16	1.16	1.15	1.15	1.15	1.14	1.14	1.14	1.13	1.13	1.12	1.12	1.11	1.09	1.07
-30	25.57	25.49	25.35	25.17	24.95	24.68	24.55	24.38	24.16	23.90	23.61	23.27	22.48	21.53	20.43
-20	140	139.9	139.7	139.4	138.9	138.3	137.7	136.9	136	134.9	133.7	132.3	129.3	125.7	121
-15	176.5	176.3	176.1	175.8	175.5	175.1	174.7	174.3	173.8	173.2	172.6	171.8	170.2	167.7	164.7
-10	174.6	174.4	174.3	174.1	174	174	173.8	173.7	173.6	173.6	173.6	173.6	173.8	174	174
-9	173.4	173.2	173	172.9	172.8	172.7	172.6	172.5	172.4	172.4	172.4	172.4	172.7	173.1	173.2
-8	172.5	172.2	172	171.9	171.8	171.7	171.6	171.5	171.4	171.4	171.4	171.5	171.6	171.9	172.2
-7	171.7	171.5	171.3	171.1	170.9	170.8	170.6	170.5	170.4	170.4	170.6	170.7	170.8	170.9	171.2
-6	171.1	171	170.8	170.7	170.5	170.4	170.2	170.1	170	169.9	170	170.2	170.3	170.2	170.4
-5	170.7	170.5	170.4	170.2	170.1	169.9	169.8	169.7	169.6	169.6	169.6	169.6	169.5	169.5	169.9
-4	170.3	170.1	170	169.8	169.7	169.6	169.5	169.5	169.4	169.4	169.3	169.3	169	169.2	169.6
-3	170	169.8	169.6	169.3	169.2	169.2	169.1	169.1	169.1	169.1	169	168.9	168.8	168.8	169.2
-2.5	169.9	169.7	169.4	169.2	169.1	169.1	169	169	169.1	169	169	168.9	168.8	168.8	169
-2	169.7	169.5	169.3	169.1	169	169	169	169	169	169	168.9	168.8	168.7	168.7	168.8
-1.5	169.5	169.3	169.3	169	168.9	168.9	169	169	169	169	168.9	168.8	168.7	168.7	168.7
-1	169.4	169.2	169.1	169	168.8	168.8	169	169.1	169	169	169	168.9	168.7	168.7	168.8
-0.5	169.8	169.2	168.9	168.9	168.9	168.9	169.2	169.2	169.2	169.1	169.1	169	168.8	168.8	168.9
0	171.4	171.2	170.8	170.3	170.1	169.8	169.7	169.6	169.5	169.4	169.2	169	168.9	168.9	169
0.5	171.3	171	170.7	170.2	169.8	169	168.7	168.6	168.5	168.4	168.7	168.8	169	169.2	169.4
1	171.2	170.9	170.5	170.1	169.6	169.1	168.9	168.7	168.7	168.6	168.7	168.7	169.1	169.5	169.9
1.5	171.2	170.8	170.4	170	169.6	169.3	169.1	168.9	168.8	168.9	168.9	169.1	169.4	169.9	170.5
2	171.1	170.7	170.4	170	169.7	169.6	169.3	169.1	169	169	169.2	169.4	169.8	170.3	170.9
2.5	171.1	170.8	170.5	170.1	169.8	169.6	169.4	169.2	169.1	169.3	169.5	169.7	170.2	170.7	171.4
3	171.2	170.8	170.5	170.2	169.9	169.6	169.5	169.5	169.5	169.6	169.8	170.1	170.6	171.2	172
4	171.4	171.1	170.9	170.6	170.4	170.1	170.3	170.4	170.4	170.4	170.5	170.8	171.6	172.3	173.2
5	172.1	171.8	171.6	171.4	171.2	171	171.1	171.3	171.4	171.5	171.6	171.9	172.6	173.5	174.3
6	173.2	173	172.7	172.4	172.2	172.1	172.2	172.4	172.7	172.9	173.1	173.3	173.9	174.7	175.3
7	174.7	174.5	174.2	173.9	173.7	173.6	173.7	174	174.3	174.6	174.7	174.9	175.4	175.8	176
8	176.4	176.2	175.9	175.7	175.5	175.4	175.5	175.7	175.9	176.1	176.3	176.3	176.6	176.5	176.3
9	177.9	177.6	177.4	177.2	177.1	177	177	177.1	177.2	177.3	177.3	177.2	177.1	176.6	175.7
10	178.7	178.6	178.4	178.3	178.2	178.1	178	177.9	177.7	177.6	177.4	177.2	176.6	175.6	173.9
15	160.1	160.5	160.8	161	161	160.8	159.9	158.9	157.7	156.3	154.7	153.1	149.4	145.7	141.2
20	101.1	101.5	101.7	101.7	101.6	101.3	100.4	99.33	98.10	96.72	95.17	93.48	89.66	85.26	81.21
30	11.59	11.63	11.65	11.64	11.62	11.57	11.42	11.26	11.07	10.87	10.65	10.41	9.89	9.32	8.69
45	0.86	0.86	0.86	0.86	0.86	0.86	0.85	0.85	0.84	0.84	0.83	0.82	0.81	0.79	0.77
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注:

表--3

光 强 分 布 数 据 表 格

单位: cd

H (DEG) V (DEG)	7	8	9	10	15	20	30	45	60	75	90				
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
-60	0.04	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00					
-45	1.06	1.04	1.02	0.99	0.84	0.66	0.31	0.01	0.00	0.00					
-30	19.20	17.76	16.32	14.88	8.22	4.33	1.51	0.29	0.00	0.00					
-20	115.6	109.6	103.1	96.20	60.94	29.79	3.83	0.60	0.00	0.00					
-15	160.7	156.3	150.7	145	104.5	55.94	6.62	0.75	0.00	0.00					
-10	173.7	172.9	171.3	169	137.1	82.99	10.47	0.87	0.01	0.00					
-9	173.2	173.2	172.3	170.4	141.4	87.64	11.20	0.89	0.01	0.00					
-8	172.4	172.6	172.5	171.3	145.5	92.03	11.82	0.91	0.01	0.00					
-7	171.5	172	172.1	171.5	148.6	95.95	12.47	0.92	0.02	0.00					
-6	170.8	171.4	171.7	171.4	151.3	99.35	13.01	0.93	0.02	0.00					
-5	170.3	170.8	171.3	171.5	153.7	102	13.43	0.94	0.02	0.00					
-4	169.9	170.4	171	171.4	155.7	103.9	13.73	0.95	0.02	0.00					
-3	169.6	170	170.7	171.2	157.3	105.3	13.92	0.96	0.02	0.00					
-2.5	169.4	169.9	170.5	171.2	157.8	105.7	13.97	0.96	0.02	0.00					
-2	169.2	169.8	170.6	171.2	158.2	106.1	14.00	0.96	0.02	0.00					
-1.5	169.2	169.8	170.7	171.3	158.5	106.3	14.00	0.96	0.02	0.00					
-1	169.3	169.8	170.8	171.5	158.5	106.3	13.97	0.96	0.02	0.00					
-0.5	169.4	169.9	171	171.6	158.5	106.2	13.92	0.96	0.02	0.00					
0	169.5	170	171.2	171.7	158.3	105.9	13.84	0.96	0.02	0.00	0.00				
0.5	170	170.6	171.6	172	157	104.4	13.59	0.95	0.02	0.00					
1	170.5	171.2	172	172.2	155.7	102.7	13.32	0.95	0.02	0.00					
1.5	171.1	171.8	172.4	172.4	154.1	100.9	13.03	0.94	0.02	0.00					
2	171.7	172.5	172.8	172.5	152.4	98.92	12.71	0.93	0.02	0.00					
2.5	172.3	172.9	173.1	172.6	150.6	96.81	12.38	0.92	0.02	0.00					
3	172.8	173.3	173.4	172.6	148.6	94.56	12.02	0.91	0.02	0.00					
4	173.9	174.2	174	172.6	144.1	89.67	11.27	0.89	0.02	0.00					
5	174.7	174.8	174	172	140.5	84.27	10.47	0.87	0.02	0.00					
6	175.4	175.1	173.5	170.7	136.5	79.21	9.62	0.84	0.02	0.00					
7	175.7	174.5	172.2	168.8	131.5	74.95	8.74	0.82	0.01	0.00					
8	175.2	173.2	170.3	166	125.9	70.34	7.83	0.79	0.01	0.00					
9	173.8	171.2	167	161.9	119.3	65.26	7.06	0.76	0.01	0.00					
10	171.4	167.8	163	157.2	112.8	59.92	6.52	0.73	0.01	0.00					
15	136.2	130.8	124.1	116.6	73.52	34.05	4.01	0.56	0.00	0.00					
20	77.04	72.55	67.58	62.30	34.84	14.83	2.45	0.42	0.00	0.00					
30	8.03	7.38	6.90	6.40	4.06	2.51	1.13	0.16	0.00	0.00					
45	0.75	0.72	0.70	0.67	0.54	0.39	0.14	0.00	0.00	0.00					
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-09-27

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: