

投光灯具参数概要:


报告中的参数折算为光源光通为1000lm条件下.

最大光强		356.1 cd/1000lm.
(Luminaire orientation as tested.)		0.0 度 (垂直)
		0.0 度 (水平)
光束角	10% I _{max}	160.4V x 159.1H
	50% I _{max}	111.5V x 112.2H
	90% I _{max}	45.5V x 48.6H
光束内光通	总计	1000.0 lm/1000lm.
	至 10% I _{max}	986.2 lm/1000lm.
	至 50% I _{max}	736.0 lm/1000lm.
	至 90% I _{max}	187.3 lm/1000lm
	上射 LOR	0.0 %
	下射 LOR	100.0 %
灯具效率(光输出比)		100.0 %

H(β)角度范围:-90度 - 90度	V(B)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度	V(B)角度间隔: 0.5度
测试速度: 快速	测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.293
环境温度:25.3℃	环境湿度:65.0%
测试人员:XGZ	测试距离:6.350米 [K=1.0000]
测试日期:2024-03-15	备注: 118007-115 15W 4000K 60D

灯 具 光 度 数 据

实测参数: U:222.0V I:0.1347A P:14.93W PF:0.4993 实检光通:1164.53x1 lm		
灯具名称: 118007-115	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

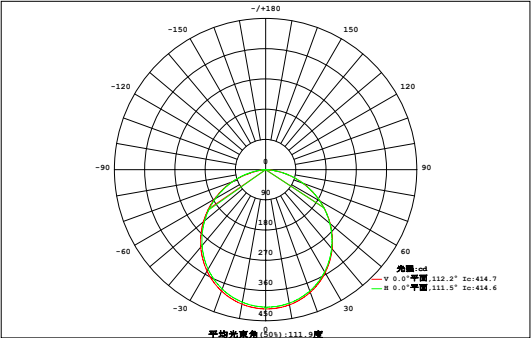

光源数据		光度数据 光效:78.01lm/W	
型号		峰值光强(cd)	414.7
标称功率(W)	15	有效效率(%)	98.6
额定电源电压(V)	220	有效光通(lm)	1148
额定光通量(lm)	1164.53	灯具效率(%)	100.0
灯具内光源数(只)	1	总光通量(lm)	1165
实测电源电压(V)	220	50%光束角(H,V)	112°,112°

垂 直 角 度 V (°)	区 域 光 通 量																单位:lm		Φ总	Φ有
	0.00	0.01	0.03	0.08	0.16	0.27	0.39	0.48	0.54	0.56	0.54	0.47	0.37	0.25	0.15	0.07	0.03	0.01	4.39	0.48
90	0.00	0.01	0.03	0.08	0.16	0.27	0.39	0.48	0.54	0.56	0.54	0.47	0.37	0.25	0.15	0.07	0.03	0.01	4.39	0.48
80	0.00	0.04	0.21	0.55	1.00	1.50	1.95	2.28	2.48	2.50	2.35	2.06	1.64	1.16	0.70	0.32	0.09	0.01	20.8	18.8
70	0.01	0.12	0.53	1.20	2.02	2.87	3.66	4.24	4.56	4.59	4.31	3.76	3.01	2.16	1.35	0.66	0.20	0.02	39.3	38.6
60	0.01	0.22	0.85	1.83	2.99	4.20	5.30	6.12	6.57	6.59	6.18	5.40	4.33	3.13	1.97	1.00	0.32	0.03	57.0	56.7
50	0.02	0.32	1.16	2.40	3.87	5.41	6.80	7.83	8.38	8.40	7.88	6.88	5.52	4.00	2.54	1.30	0.43	0.04	73.2	72.9
40	0.03	0.41	1.42	2.88	4.62	6.43	8.06	9.28	9.92	9.93	9.32	8.13	6.53	4.75	3.02	1.55	0.52	0.05	86.9	86.7
30	0.03	0.48	1.63	3.27	5.22	7.23	9.05	10.4	11.1	11.1	10.4	9.09	7.32	5.35	3.41	1.76	0.60	0.06	97.6	97.4
20	0.04	0.53	1.77	3.53	5.63	7.79	9.73	11.2	11.9	11.9	11.2	9.76	7.89	5.77	3.68	1.90	0.65	0.07	105	105
10	0.04	0.55	1.84	3.66	5.84	8.08	10.1	11.6	12.3	12.3	11.6	10.2	8.21	6.00	3.82	1.97	0.68	0.07	109	109
0	0.04	0.55	1.83	3.64	5.81	8.03	10.0	11.4	12.2	12.3	11.6	10.2	8.21	5.99	3.82	1.97	0.67	0.07	108	108
-10	0.04	0.52	1.74	3.48	5.54	7.64	9.50	10.9	11.7	11.8	11.1	9.77	7.88	5.75	3.66	1.89	0.64	0.07	104	104
-20	0.03	0.47	1.59	3.18	5.07	7.00	8.75	10.1	10.9	10.9	10.3	9.00	7.28	5.31	3.38	1.74	0.59	0.06	95.6	95.4
-30	0.03	0.39	1.37	2.77	4.43	6.16	7.71	8.91	9.59	9.65	9.06	7.94	6.42	4.69	2.98	1.53	0.51	0.05	84.2	84.0
-40	0.02	0.30	1.10	2.26	3.66	5.11	6.41	7.43	8.01	8.06	7.56	6.61	5.35	3.91	2.48	1.26	0.41	0.04	70.0	69.7
-50	0.01	0.21	0.79	1.69	2.77	3.89	4.91	5.71	6.17	6.21	5.83	5.09	4.11	3.00	1.90	0.95	0.29	0.03	53.6	53.2
-60	0.01	0.11	0.47	1.08	1.81	2.57	3.28	3.84	4.16	4.20	3.95	3.44	2.77	2.01	1.24	0.59	0.17	0.02	35.7	34.9
-70	0.00	0.04	0.17	0.45	0.83	1.23	1.61	1.93	2.12	2.15	2.02	1.76	1.39	0.97	0.56	0.25	0.07	0.01	17.6	14.3
-80	0.00	0.01	0.03	0.06	0.11	0.18	0.25	0.32	0.37	0.38	0.36	0.31	0.24	0.17	0.10	0.05	0.02	0.01	2.98	0.00
-90	0.00	0.01	0.03	0.06	0.11	0.18	0.25	0.32	0.37	0.38	0.36	0.31	0.24	0.17	0.10	0.05	0.02	0.01	2.98	0.00
横 向 角 度 H (°)																				
Φ总	0.36	5.28	18.5	38.0	61.4	85.6	107	124	133	134	126	110	88.5	64.4	40.8	20.8	6.89	0.69	1165	---
Φ有	0.00	3.92	17.5	37.1	60.5	84.7	107	123	132	133	125	109	87.6	63.5	39.8	19.8	5.85	0.07	---	1148

半边峰角: U:55.1,D:57.0 , L:56.7,R:56.2 NEMA Beam Type: Type 7

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-115 15W 4000K 60D

灯 具 等 光 强 曲 线


实测参数: U:222.0V I:0.1347A P:14.93W PF:0.4993 实检光通:1164.53x1 lm		
灯具名称: 118007-115	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

锥面光通量(90度):

629.34 lm
%lum = 54.0%
%lamp = 54.0%

锥面光通量(120度):

923.85 lm
%lum = 79.3%
%lamp = 79.3%

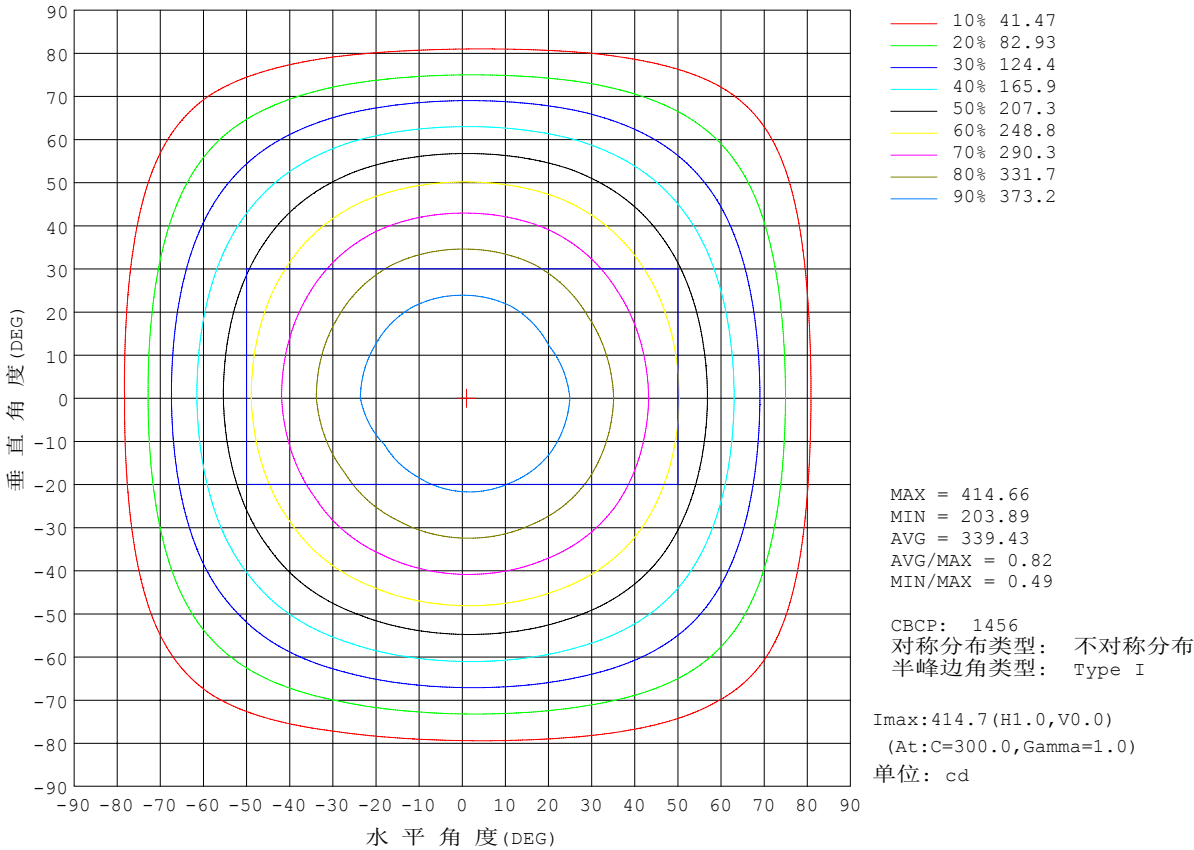


H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-115 15W 4000K 60D

平面等照度曲线


实测参数: U:222.0V I:0.1347A P:14.93W PF:0.4993 实检光通:1164.53x1 lm		
灯具名称: 118007-115	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

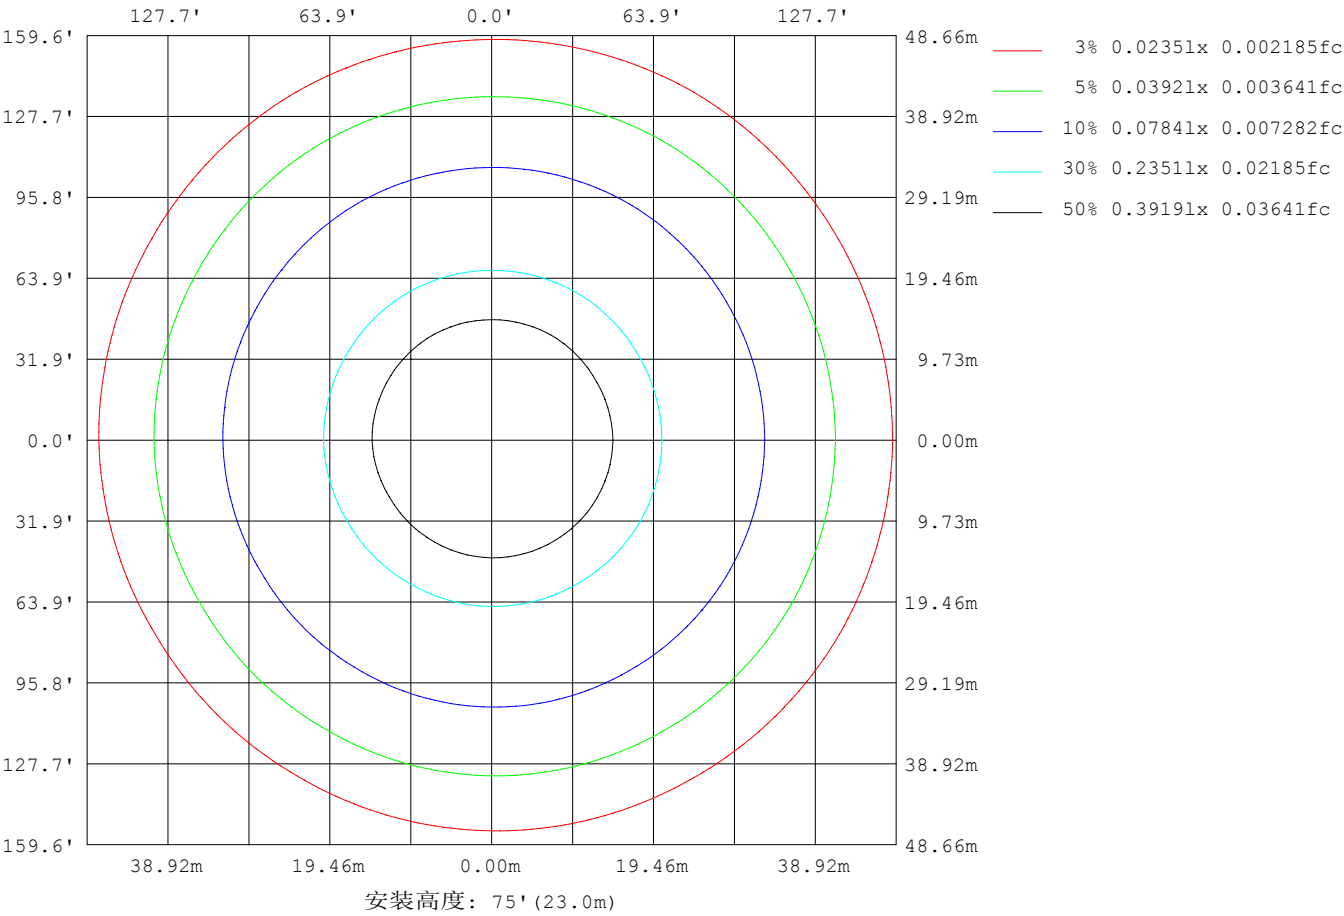

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-115 15W 4000K 60D

平面照度曲线

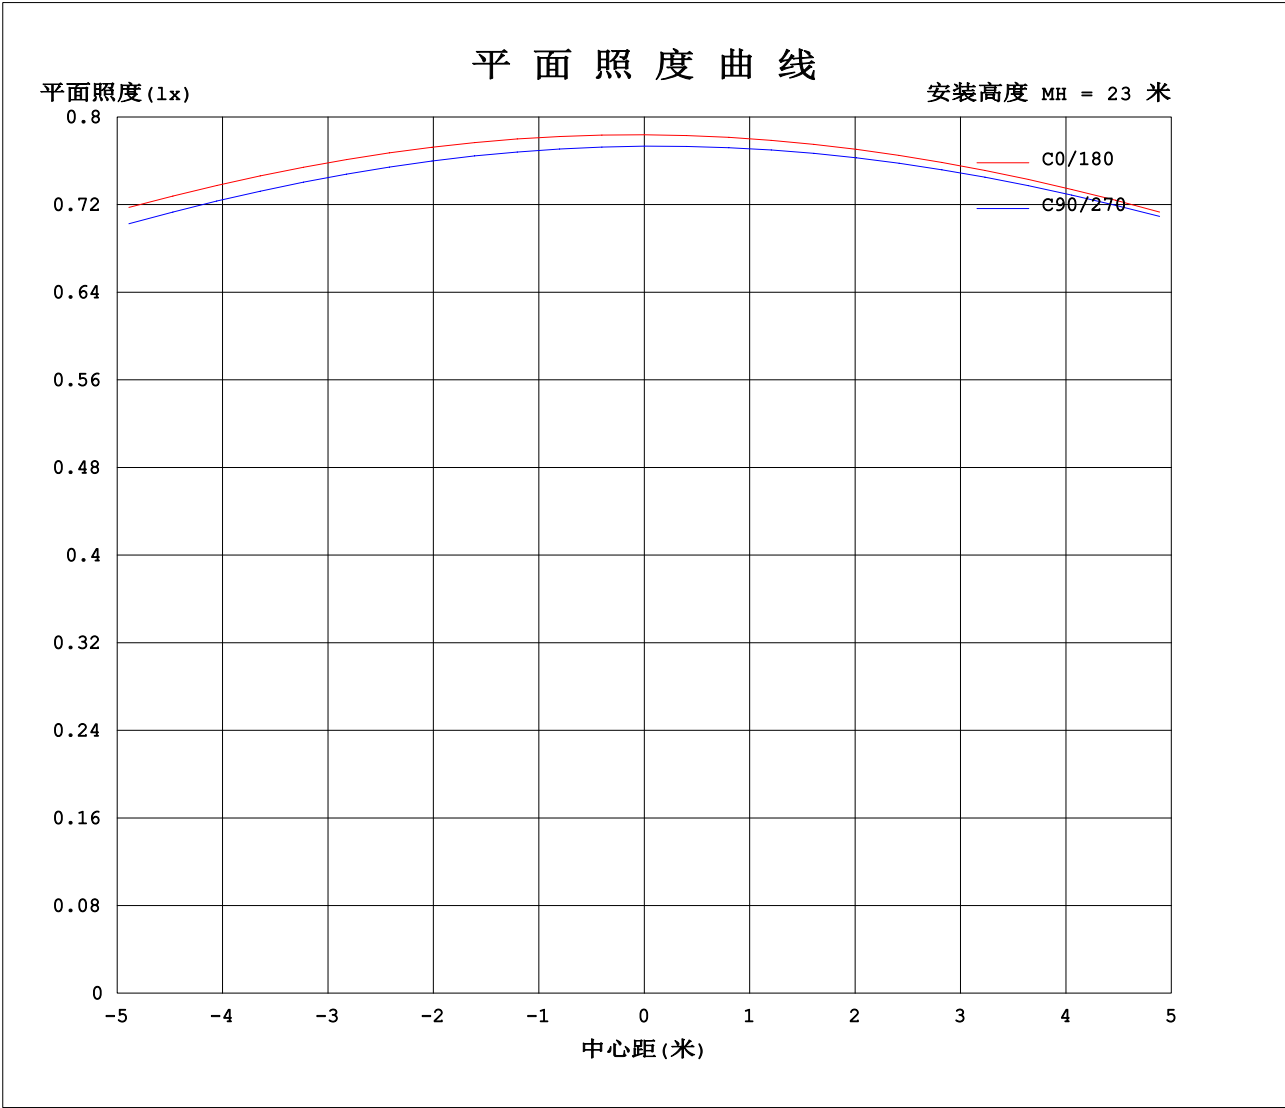


H(β) 角度范围: -90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: XGZ
测试日期: 2024-03-15

V(B) 角度范围: -90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.0.293
环境湿度: 65.0%
测试距离: 6.350米 [K=1.0000]
备注: 118007-115 15W 4000K 60D

灯 具 有 效 平 均 照 度 图

实测参数: U:222.0V I:0.1347A P:14.93W PF:0.4993 实检光通:1164.53x1 lm		
灯具名称: 118007-115	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

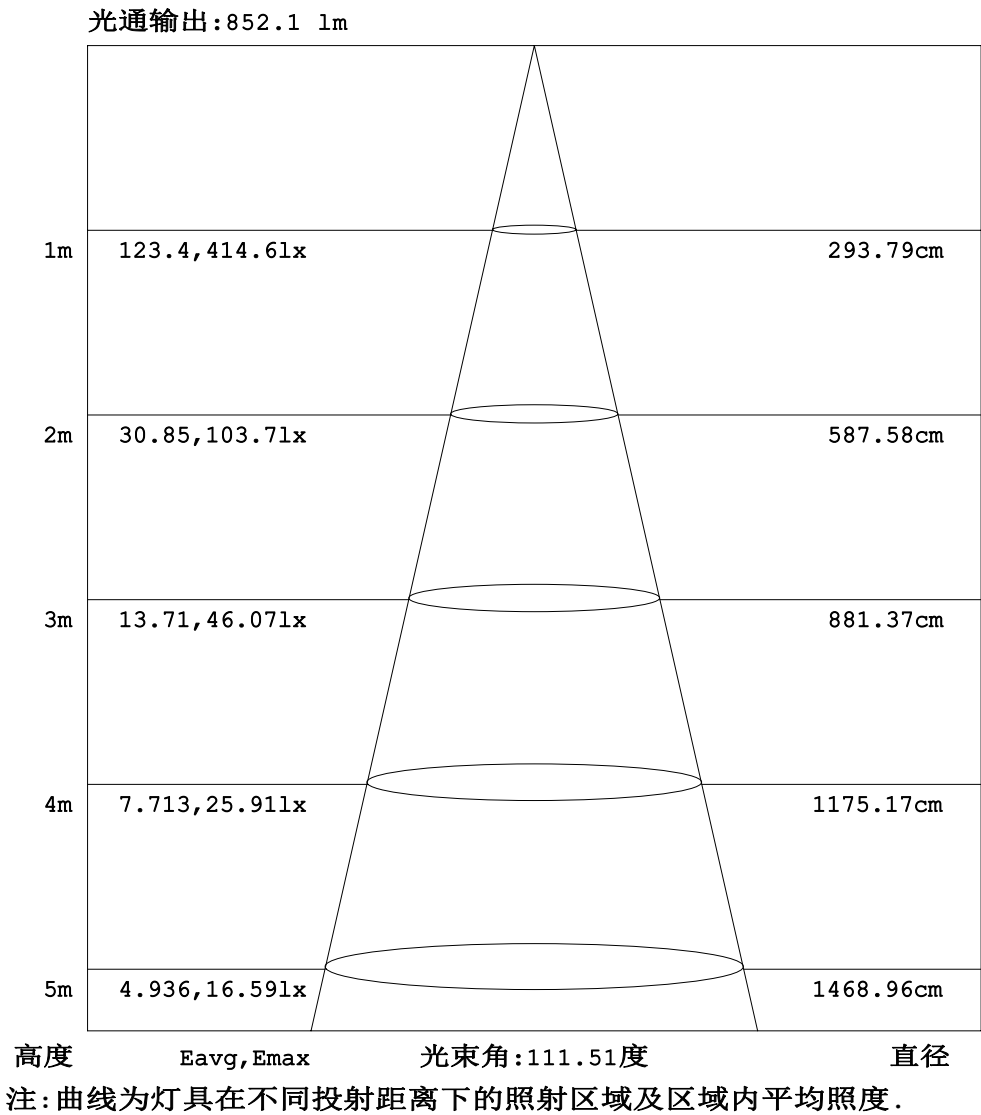

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-115 15W 4000K 60D

表--1

光强分布数据表格

单位: cd

H (DEG) V (DEG)	-90	-75	-60	-45	-30	-20	-15	-10	-9	-8	-7	-6	-5	-4	-3
-90		0.56	0.83	0.83	0.83	0.84	0.84	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.86
-75		3.86	18.69	38.19	53.98	62.48	65.72	68.21	68.61	68.99	69.34	69.65	69.93	70.18	70.40
-60		17.80	64.05	106.5	140.1	157	163.4	168.2	169	169.7	170.3	170.9	171.4	171.8	172.2
-45		35.90	107.8	170	220.1	244.1	253.4	260.5	261.6	262.6	263.5	264.3	265	265.6	266.1
-30		50.65	142.9	221.5	284.4	314.3	325.3	334.1	335.5	336.8	337.9	338.9	339.8	340.6	341.2
-20		58.54	160.6	247.5	314.9	348.1	360	369	370.5	371.9	373.2	374.4	375.4	376.2	377
-15		61.51	166.9	257.3	327.5	360.2	372.6	381.6	383	384.4	385.7	386.9	387.9	388.8	389.6
-10		63.64	171.7	264.8	337.5	370.2	381.5	390.8	392.2	393.6	394.8	395.9	396.9	397.9	398.8
-9		63.96	172.4	266	339.2	372.2	382.9	392.2	393.7	395.1	396.2	397.3	398.3	399.3	400.2
-8		64.25	173.1	267.1	340.8	374	384.8	393.4	395	396.3	397.5	398.6	399.6	400.5	401.5
-7		64.50	173.8	268.1	342.2	375.8	386.7	394.6	396	397.4	398.7	399.8	400.7	401.6	402.5
-6		64.71	174.3	269	343.5	377.4	388.6	395.5	397	398.4	399.6	400.7	401.7	402.6	403.5
-5		64.89	174.8	269.8	344.7	378.9	390.3	397.3	398.1	399.2	400.4	401.5	402.5	403.4	404.2
-4		65.03	175.2	270.6	345.8	380.3	391.9	399.3	400.2	400.8	401.1	402.1	403.2	404.1	404.9
-3		65.14	175.6	271.2	346.8	381.5	393.4	401.3	402.3	403	403.4	403.6	403.6	404.5	405.3
-2.5		65.17	175.7	271.5	347.2	382.1	394.1	402.2	403.3	404.1	404.6	404.9	404.7	404.6	405.5
-2		65.20	175.9	271.7	347.6	382.7	394.8	403.1	404.2	405.1	405.8	406.2	406.2	405.7	405.5
-1.5		65.22	176	271.9	348	383.2	395.5	404	405.2	406.2	407	407.5	407.7	407.5	406.5
-1		65.24	176.1	272.1	348.3	383.6	396.1	404.9	406.2	407.2	408.2	408.8	409.2	409.3	408.8
-0.5		65.24	176.2	272.3	348.6	384.1	396.7	405.7	407.1	408.3	409.3	410.2	410.8	411.2	411.2
0	0.28	65.23	176.3	272.4	348.9	384.5	397.2	406.5	407.9	409.2	410.4	411.4	412.3	413.1	413.7
0.5		65.27	176.3	272.5	348.8	384.5	397.1	406.3	407.8	409	410.2	411.1	411.9	412.6	413
1		65.30	176.3	272.4	348.8	384.4	397	406.1	407.6	408.8	409.9	410.8	411.5	412.1	412.4
1.5		65.32	176.2	272.4	348.7	384.3	396.8	405.9	407.3	408.5	409.6	410.4	411.1	411.6	411.7
2		65.33	176.2	272.3	348.6	384.1	396.6	405.6	407	408.2	409.2	410	410.7	411	411.2
2.5		65.33	176.2	272.2	348.5	383.9	396.4	405.4	406.7	407.8	408.8	409.6	410.2	410.6	410.8
3		65.32	176.1	272.1	348.3	383.7	396.2	405	406.3	407.5	408.4	409.2	409.8	410.2	410.4
4		65.28	175.9	271.8	347.9	383.2	395.5	404.3	405.6	406.7	407.6	408.4	409	409.4	409.6
5		65.20	175.6	271.4	347.3	382.5	394.8	403.4	404.7	405.8	406.8	407.6	408.2	408.6	408.8
6		65.09	175.3	270.9	346.6	381.7	393.9	402.5	403.8	405	405.9	406.7	407.4	407.8	408
7		64.93	174.9	270.3	345.8	380.8	392.9	401.6	402.8	404	405	405.8	406.4	406.9	407.1
8		64.74	174.4	269.5	344.9	379.7	391.8	400.5	401.8	402.9	403.9	404.7	405.3	405.8	406
9		64.52	173.9	268.7	343.8	378.6	390.5	399.3	400.6	401.8	402.7	403.5	404.2	404.6	404.9
10		64.26	173.3	267.8	342.6	377.3	389.3	398	399.3	400.4	401.5	402.3	402.9	403.3	403.6
15		62.42	169.3	261.8	334.9	369.1	381.2	389.8	391.1	392.2	393.1	393.9	394.5	395	395.4
20		59.72	163.7	253.3	324.3	358	369.9	378.3	379.6	380.6	381.5	382.3	383	383.5	383.9
30		52.30	147.6	229.7	295.3	326.6	337.7	345.2	346.4	347.4	348.3	349.1	349.7	350.3	350.7
45		37.99	113.8	179.7	233.1	258.5	267.2	273.4	274.4	275.3	276.1	276.7	277.3	277.8	278.2
60		19.68	70.15	116.5	153.9	171.2	177.3	181.8	182.5	183.1	183.7	184.2	184.6	185	185.3
75		4.20	22.89	46.55	65.83	74.62	77.83	80.26	80.66	81.02	81.35	81.64	81.91	82.14	82.34
90		0.29	0.31	0.29	0.27	0.40	0.47	0.53	0.55	0.56	0.57	0.59	0.60	0.61	0.63

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员: XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-115 15W 4000K 60D

表--2

光 强 分 布 数 据 表 格

单位: cd

H (DEG) V (DEG)	-2.5	-2	-1.5	-1	-0.5	0	0.5	1	1.5	2	2.5	3	4	5	6
-90	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86
-75	70.50	70.59	70.68	70.75	70.82	70.88	70.93	70.97	71.00	71.03	71.05	71.06	71.06	71.02	70.96
-60	172.4	172.5	172.7	172.8	172.9	172.9	173	173	173	173	173	173	172.9	172.7	172.5
-45	266.3	266.5	266.7	266.8	266.9	267	267.1	267.1	267.1	267.1	267.1	267	266.8	266.5	266.2
-30	341.5	341.8	342	342.1	342.3	342.4	342.5	342.5	342.5	342.5	342.5	342.4	342.1	341.7	341.2
-20	377.3	377.5	377.8	378	378.2	378.3	378.4	378.5	378.5	378.5	378.4	378.4	378.1	377.7	377.1
-15	390	390.3	390.5	390.8	391	391.1	391.3	391.3	391.4	391.4	391.3	391.3	391	390.6	390.1
-10	399.2	399.6	399.9	400.2	400.4	400.6	400.8	400.9	401	401	401	401	400.8	400.4	400
-9	400.6	401	401.3	401.6	401.9	402.1	402.2	402.4	402.5	402.5	402.5	402.5	402.4	402	401.6
-8	401.9	402.3	402.6	402.9	403.2	403.4	403.6	403.8	403.9	404	404	404	403.8	403.6	403.3
-7	403	403.4	403.8	404.1	404.4	404.6	404.9	405	405.2	405.2	405.3	405.3	405.2	405	404.7
-6	403.9	404.3	404.7	405.1	405.4	405.7	405.9	406.1	406.3	406.4	406.5	406.5	406.5	406.4	406.1
-5	404.7	405.1	405.5	405.9	406.3	406.6	406.9	407.1	407.3	407.5	407.6	407.6	407.8	407.7	407.4
-4	405.3	405.7	406.1	406.6	407	407.4	407.8	408.1	408.3	408.5	408.7	408.9	409	408.9	408.6
-3	405.7	406.1	406.5	407	407.5	408	408.5	408.9	409.2	409.6	409.9	410.1	410.3	410.1	409.8
-2.5	405.9	406.3	406.6	407.2	407.7	408.3	408.8	409.3	409.7	410.2	410.5	410.7	410.8	410.7	410.3
-2	405.9	406.3	406.7	407.2	407.9	408.5	409.2	409.8	410.4	410.8	411.1	411.3	411.4	411.2	410.8
-1.5	405.9	406.3	406.7	407.2	407.9	408.7	409.6	410.4	411.1	411.5	411.8	412	412	411.8	411.3
-1	408.1	407.1	406.5	407	407.7	408.9	410.2	411.3	412	412.4	412.7	412.8	412.7	412.3	411.8
-0.5	411	410.5	409.5	407.6	407.3	409	411.4	412.6	413.2	413.4	413.5	413.6	413.3	412.9	412.2
0	413.9	414.2	414.3	414.4	414.5	414.6	414.6	414.7	414.6	414.5	414.4	414.4	413.9	413.3	412.7
0.5	413.1	413.2	413	412.5	411.5	409.2	407.6	408	410	411	411.6	412	412.1	412	411.5
1	412.4	412.2	411.9	411.4	410.4	409.2	408.2	407.6	407.2	407.9	409	409.7	410.4	410.6	410.4
1.5	411.7	411.5	411.2	410.7	410	409.2	408.5	408	407.6	407.2	407	407.7	408.8	409.2	409.2
2	411.2	411	410.7	410.3	409.8	409.1	408.6	408.2	407.8	407.5	407.2	406.9	407.2	407.9	408.1
2.5	410.7	410.6	410.3	410	409.6	409.1	408.7	408.3	407.9	407.6	407.3	407	406.3	406.6	406.9
3	410.3	410.2	410	409.7	409.4	409	408.6	408.3	408	407.7	407.4	407	406.4	405.7	405.9
4	409.6	409.5	409.4	409.2	408.9	408.6	408.4	408.1	407.9	407.6	407.3	407	406.3	405.6	404.8
5	408.8	408.8	408.7	408.6	408.4	408.2	408	407.8	407.6	407.3	407	406.8	406.1	405.4	404.5
6	408	408	407.9	407.9	407.7	407.6	407.4	407.2	407	406.8	406.6	406.3	405.7	405	404.1
7	407.1	407.1	407.1	407	406.9	406.8	406.7	406.5	406.3	406.2	405.9	405.7	405.2	404.4	403.5
8	406.1	406.1	406.1	406.1	406	405.9	405.8	405.7	405.5	405.3	405.1	404.9	404.4	403.7	402.8
9	405	405	405	405	405	404.9	404.8	404.7	404.5	404.4	404.2	403.9	403.4	402.8	401.9
10	403.7	403.8	403.8	403.8	403.7	403.7	403.6	403.5	403.4	403.2	403	402.8	402.3	401.7	400.9
15	395.5	395.6	395.7	395.7	395.7	395.7	395.7	395.6	395.5	395.4	395.2	395.1	394.6	394	393.3
20	384.1	384.2	384.3	384.4	384.4	384.4	384.4	384.3	384.3	384.1	384	383.8	383.4	382.9	382.2
30	350.9	351	351.1	351.2	351.2	351.2	351.3	351.2	351.2	351.1	351	350.8	350.5	350	349.3
45	278.4	278.5	278.6	278.7	278.7	278.8	278.8	278.8	278.8	278.7	278.6	278.5	278.2	277.9	277.4
60	185.4	185.5	185.6	185.7	185.7	185.8	185.8	185.8	185.8	185.8	185.8	185.7	185.6	185.3	185.1
75	82.43	82.51	82.58	82.64	82.70	82.74	82.78	82.80	82.82	82.82	82.82	82.81	82.77	82.70	82.59
90	0.64	0.64	0.65	0.66	0.66	0.67	0.68	0.69	0.69	0.70	0.71	0.72	0.74	0.76	0.77

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-115 15W 4000K 60D

表--3

光 强 分 布 数 据 表 格

单位: cd

H (DEG) V (DEG)	7	8	9	10	15	20	30	45	60	75	90				
-90	0.86	0.86	0.86	0.86	0.86	0.86	0.86	1.07	1.28	1.53					
-75	70.86	70.74	70.58	70.39	68.98	66.80	60.22	44.77	24.89	8.10					
-60	172.2	171.8	171.3	170.8	167.3	162.2	147.6	116.6	75.33	27.85					
-45	265.7	265.1	264.4	263.6	258	250.1	228.5	181.5	119.7	49.19					
-30	340.6	339.8	338.9	337.8	330.8	321.4	294.1	233.5	155	66.92					
-20	376.4	375.6	374.7	373.6	366.5	356.3	325.9	258.3	171.7	75.29					
-15	389.4	388.6	387.7	386.8	379.8	369.3	337.4	267.4	177.8	78.31					
-10	399.5	398.8	398	397	389.9	378.9	346	274.2	182.3	80.53					
-9	401.2	400.6	399.7	398.7	391.6	380.4	347.4	275.2	183	80.88					
-8	402.8	402.1	401.3	400.3	393	381.8	348.6	276.2	183.7	81.19					
-7	404.3	403.6	402.8	401.8	394.3	383.1	349.7	277	184.3	81.47					
-6	405.6	405	404.1	403.1	395.5	384.2	350.7	277.8	184.8	81.72					
-5	406.9	406.2	405.4	404.3	396.6	385.2	351.6	278.5	185.2	81.94					
-4	408.1	407.4	406.5	405.4	397.6	386.1	352.4	279.1	185.6	82.12					
-3	409.2	408.4	407.5	406.3	398.4	386.9	353	279.6	185.9	82.27					
-2.5	409.7	408.9	407.9	406.8	398.8	387.2	353.3	279.8	186	82.33					
-2	410.2	409.3	408.3	407.2	399.1	387.5	353.6	280	186.2	82.39					
-1.5	410.6	409.8	408.7	407.6	399.5	387.8	353.8	280.1	186.2	82.43					
-1	411	410.2	409.1	407.9	399.7	388	354	280.2	186.3	82.47					
-0.5	411.4	410.5	409.4	408.2	400	388.2	354.1	280.3	186.4	82.50					
0	411.8	410.9	409.8	408.5	400.2	388.4	354.2	280.4	186.4	82.52	1.77				
0.5	410.9	410	409	407.9	399.8	388.1	354.1	280.4	186.4	82.52					
1	409.9	409.2	408.3	407.2	399.3	387.8	353.9	280.3	186.4	82.51					
1.5	408.9	408.3	407.5	406.5	398.9	387.5	353.7	280.2	186.3	82.50					
2	407.9	407.4	406.7	405.7	398.4	387.1	353.5	280.1	186.3	82.47					
2.5	406.9	406.5	405.9	405	397.8	386.7	353.2	279.9	186.2	82.44					
3	405.9	405.6	405	404.2	397.3	386.3	352.9	279.7	186.1	82.40					
4	403.9	403.8	403.4	402.7	396.1	385.3	352.3	279.3	185.8	82.29					
5	403.6	402.5	401.7	401.1	394.8	384.3	351.5	278.7	185.5	82.15					
6	403.2	402.1	400.9	399.6	393.5	383.1	350.5	278.1	185.1	81.98					
7	402.6	401.5	400.3	399	392	381.8	349.5	277.4	184.7	81.78					
8	401.8	400.8	399.6	398.2	390.5	380.4	348.4	276.6	184.1	81.54					
9	401	399.9	398.7	397.4	388.9	378.9	347.1	275.6	183.6	81.27					
10	400	398.9	397.7	396.4	387.9	377.3	345.7	274.6	182.9	80.97					
15	392.5	391.6	390.5	389.1	380.7	369	337.2	268.2	178.7	78.97					
20	381.4	380.5	379.5	378.3	370.1	358.4	326.2	259.4	172.8	76.20					
30	348.6	347.8	346.8	345.7	338.6	327.9	298.1	235.6	156.7	68.41					
45	276.8	276.1	275.4	274.5	268.9	260.8	236.9	186	122.6	51.87					
60	184.7	184.3	183.8	183.3	179.5	174.2	158.5	123.2	79.77	31.16					
75	82.45	82.28	82.08	81.85	80.21	77.82	70.70	53.63	32.28	9.86					
90	0.79	0.81	0.83	0.84	0.93	1.02	1.20	1.27	1.34	1.56					

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-115 15W 4000K 60D