

投光灯具参数概要:


报告中的参数折算为光源光通为1000lm条件下.

最大光强		349.1 cd/1000lm.
(Luminaire orientation as tested.)		0.0 度 (垂直)
		0.0 度 (水平)
光束角	10% I _{max}	162.4V x 162.1H
	50% I _{max}	112.5V x 113.6H
	90% I _{max}	45.6V x 49.3H
光束内光通	总计	1000.0 lm/1000lm.
	至 10% I _{max}	984.7 lm/1000lm.
	至 50% I _{max}	735.9 lm/1000lm.
	至 90% I _{max}	187.5 lm/1000lm
上射 LOR		0.0 %
下射 LOR		100.0 %
灯具效率(光输出比)		100.0 %

H(β)角度范围:-90度 - 90度	V(B)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度	V(B)角度间隔: 0.5度
测试速度: 快速	测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境温度:25.3℃	环境湿度:65.0%
测试人员:XGZ	测试距离:6.350米 [K=1.0000]
测试日期:2024-03-15	备注: 118007-145 20W 4000K 120D

灯 具 光 度 数 据

实测参数: U:222.0V I:0.1792A P:19.80W PF:0.4975 实检光通:1504.62x1 lm		
灯具名称: 118007-145	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

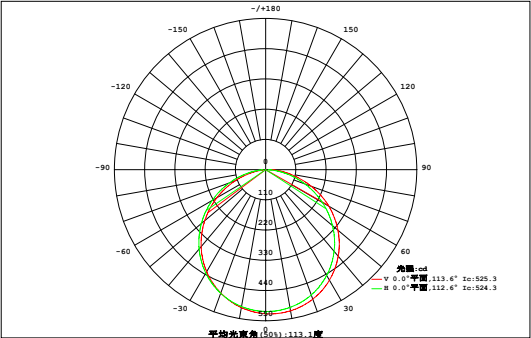

光源数据		光度数据 光效:76.00lm/W	
型号		峰值光强(cd)	525.3
标称功率(W)	20	有效效率(%)	98.4
额定电源电压(V)	220	有效光通(lm)	1481
额定光通量(lm)	1504.62	灯具效率(%)	100.0
灯具内光源数(只)	1	总光通量(lm)	1505
实测电源电压(V)	220	50%光束角(H,V)	114°,113°

垂 直 角 度 V (°)	区 域 光 通 量																单位:lm		Φ总	Φ有
	0.03	0.08	0.13	0.19	0.29	0.43	0.60	0.78	0.92	1.03	1.08	1.06	0.94	0.75	0.55	0.35	0.18	0.05	9.43	2.29
90	0.03	0.08	0.22	0.54	1.07	1.71	2.33	2.85	3.21	3.37	3.31	3.03	2.52	1.88	1.26	0.73	0.32	0.07	28.5	26.2
80	0.03	0.13	0.52	1.27	2.28	3.38	4.42	5.26	5.80	5.96	5.75	5.17	4.21	3.08	2.01	1.12	0.47	0.09	50.9	50.1
70	0.03	0.23	0.91	2.04	3.47	5.03	6.47	7.62	8.31	8.48	8.11	7.24	5.89	4.32	2.77	1.51	0.61	0.11	73.1	72.7
60	0.03	0.34	1.28	2.74	4.57	6.53	8.34	9.75	10.6	10.7	10.2	9.09	7.43	5.48	3.54	1.90	0.74	0.12	93.4	93.1
50	0.04	0.45	1.59	3.35	5.51	7.81	9.92	11.6	12.5	12.7	12.0	10.6	8.71	6.47	4.21	2.25	0.85	0.14	111	110
40	0.04	0.53	1.84	3.84	6.26	8.81	11.2	13.0	14.0	14.1	13.4	11.8	9.70	7.25	4.74	2.53	0.95	0.15	124	124
30	0.05	0.59	2.01	4.17	6.79	9.52	12.0	13.9	15.0	15.1	14.3	12.7	10.4	7.78	5.11	2.74	1.02	0.16	133	133
20	0.05	0.62	2.10	4.33	7.05	9.89	12.5	14.4	15.5	15.6	14.8	13.2	10.8	8.09	5.31	2.85	1.06	0.16	138	138
10	0.05	0.62	2.09	4.32	7.01	9.82	12.4	14.3	15.3	15.6	14.9	13.2	10.9	8.09	5.31	2.86	1.06	0.16	138	138
0	0.05	0.59	1.99	4.12	6.68	9.34	11.7	13.6	14.7	15.0	14.3	12.7	10.4	7.79	5.11	2.75	1.03	0.16	132	132
-10	0.04	0.52	1.81	3.75	6.10	8.55	10.8	12.6	13.7	13.9	13.2	11.8	9.71	7.24	4.75	2.56	0.96	0.15	122	122
-20	0.04	0.44	1.55	3.24	5.31	7.52	9.55	11.2	12.2	12.4	11.8	10.5	8.63	6.47	4.25	2.29	0.86	0.14	108	108
-30	0.03	0.33	1.23	2.61	4.35	6.22	7.94	9.33	10.2	10.4	9.91	8.82	7.28	5.47	3.61	1.95	0.75	0.12	90.6	90.3
-40	0.03	0.22	0.87	1.91	3.26	4.71	6.06	7.20	7.91	8.10	7.75	6.92	5.72	4.32	2.88	1.56	0.61	0.11	70.1	69.7
-50	0.03	0.13	0.49	1.18	2.08	3.08	4.04	4.86	5.40	5.58	5.38	4.83	4.03	3.07	2.07	1.15	0.46	0.09	47.9	47.0
-60	0.03	0.08	0.20	0.48	0.93	1.46	2.00	2.50	2.85	3.01	2.96	2.72	2.31	1.80	1.25	0.72	0.31	0.07	25.7	22.9
-70	0.03	0.08	0.13	0.19	0.26	0.36	0.48	0.62	0.74	0.82	0.86	0.84	0.76	0.65	0.50	0.33	0.17	0.05	7.86	0.67
-80	0.03	0.08	0.13	0.19	0.26	0.36	0.48	0.62	0.74	0.82	0.86	0.84	0.76	0.65	0.50	0.33	0.17	0.05	7.86	0.67
-90	0.03	0.08	0.13	0.19	0.26	0.36	0.48	0.62	0.74	0.82	0.86	0.84	0.76	0.65	0.50	0.33	0.17	0.05	7.86	0.67
横 向 角 度 H (°)																				
Φ总	0.62	6.05	21.0	44.3	73.3	104	133	155	169	172	164	146	120	90.0	59.2	32.2	12.4	2.10	1505	---
Φ有	0.00	3.93	19.3	42.7	71.7	103	131	154	167	171	163	145	119	88.8	58.1	31.0	11.3	1.06	---	1481

半边峰角: U:55.8,D:57.4 , L:56.6,R:57.6 NEMA Beam Type: Type 7

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-145 20W 4000K 120D

灯 具 等 光 强 曲 线


实测参数: U:222.0V I:0.1792A P:19.80W PF:0.4975 实检光通:1504.62x1 lm		
灯具名称: 118007-145	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

锥面光通量(90度):

798.39 lm
%lum = 53.1%
%lamp = 53.1%

锥面光通量(120度):

1176.3 lm
%lum = 78.2%
%lamp = 78.2%

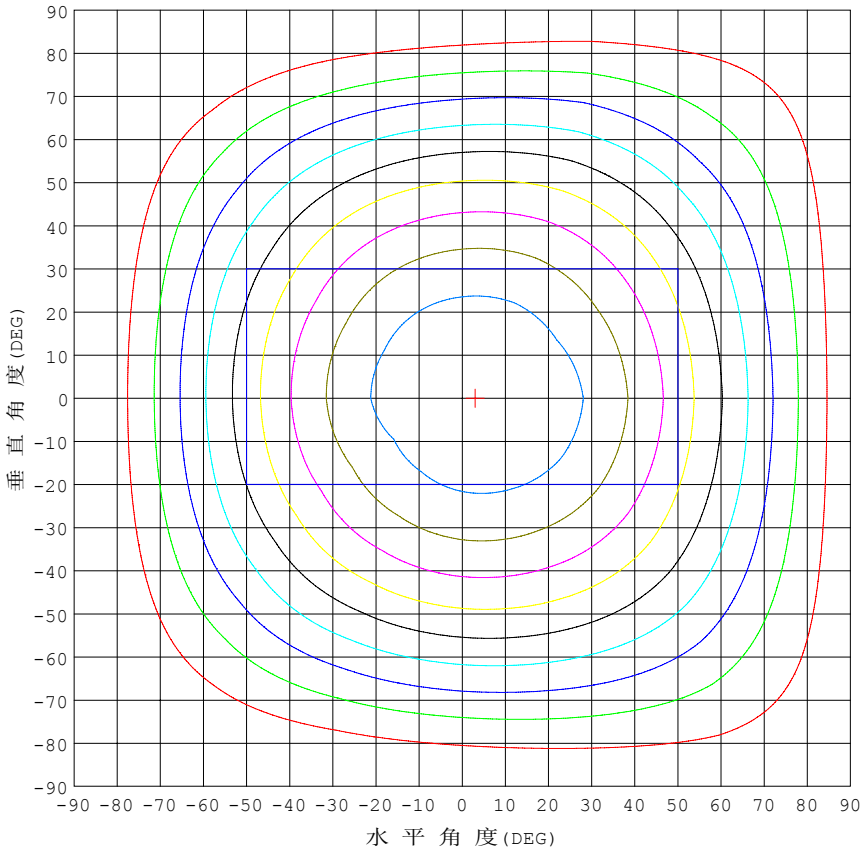


H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-145 20W 4000K 120D

平面等照度曲线


实测参数: U:222.0V I:0.1792A P:19.80W PF:0.4975 实检光通:1504.62x1 lm		
灯具名称: 118007-145	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

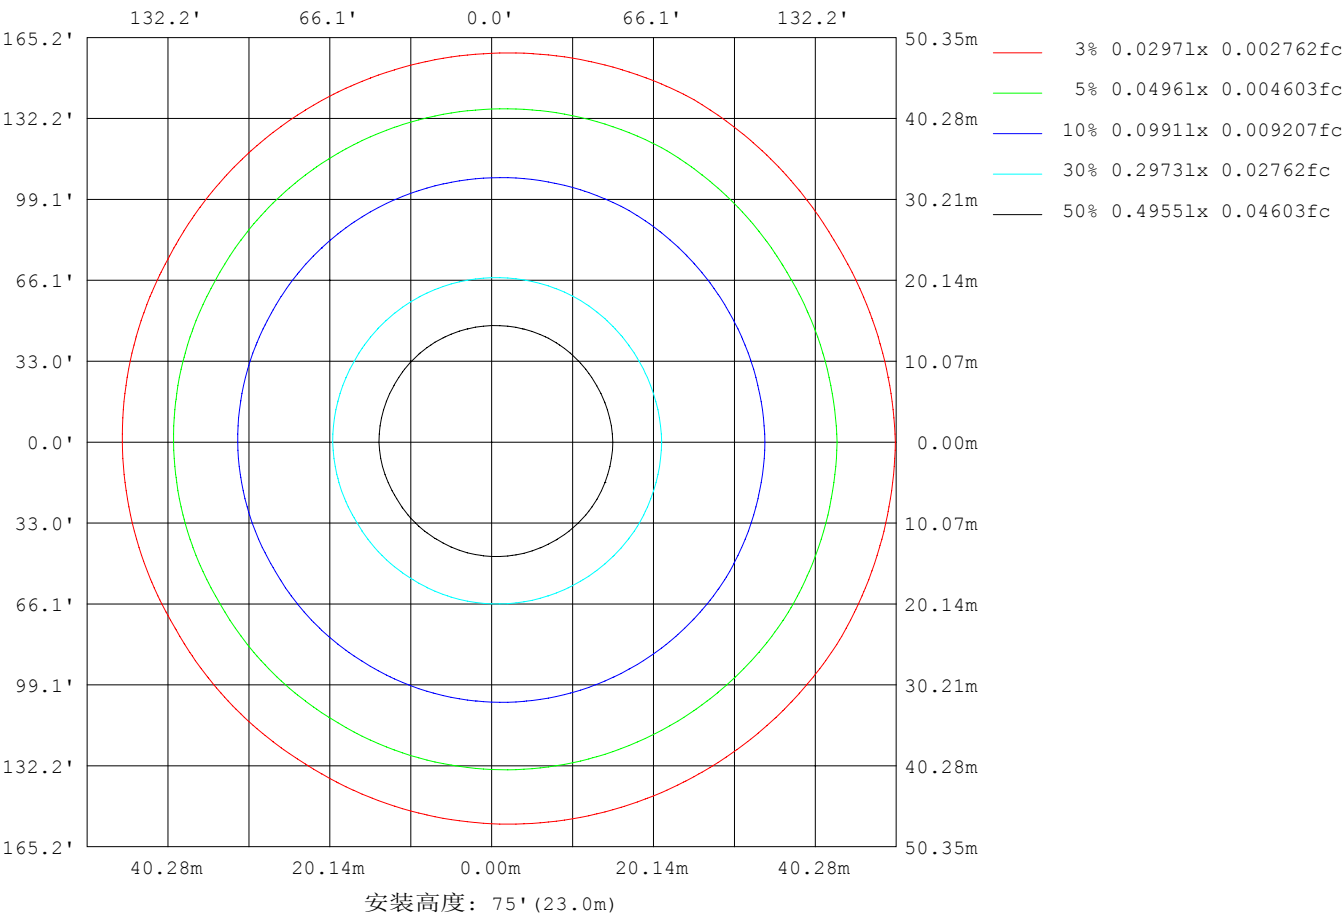

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-145 20W 4000K 120D

平面照度曲线

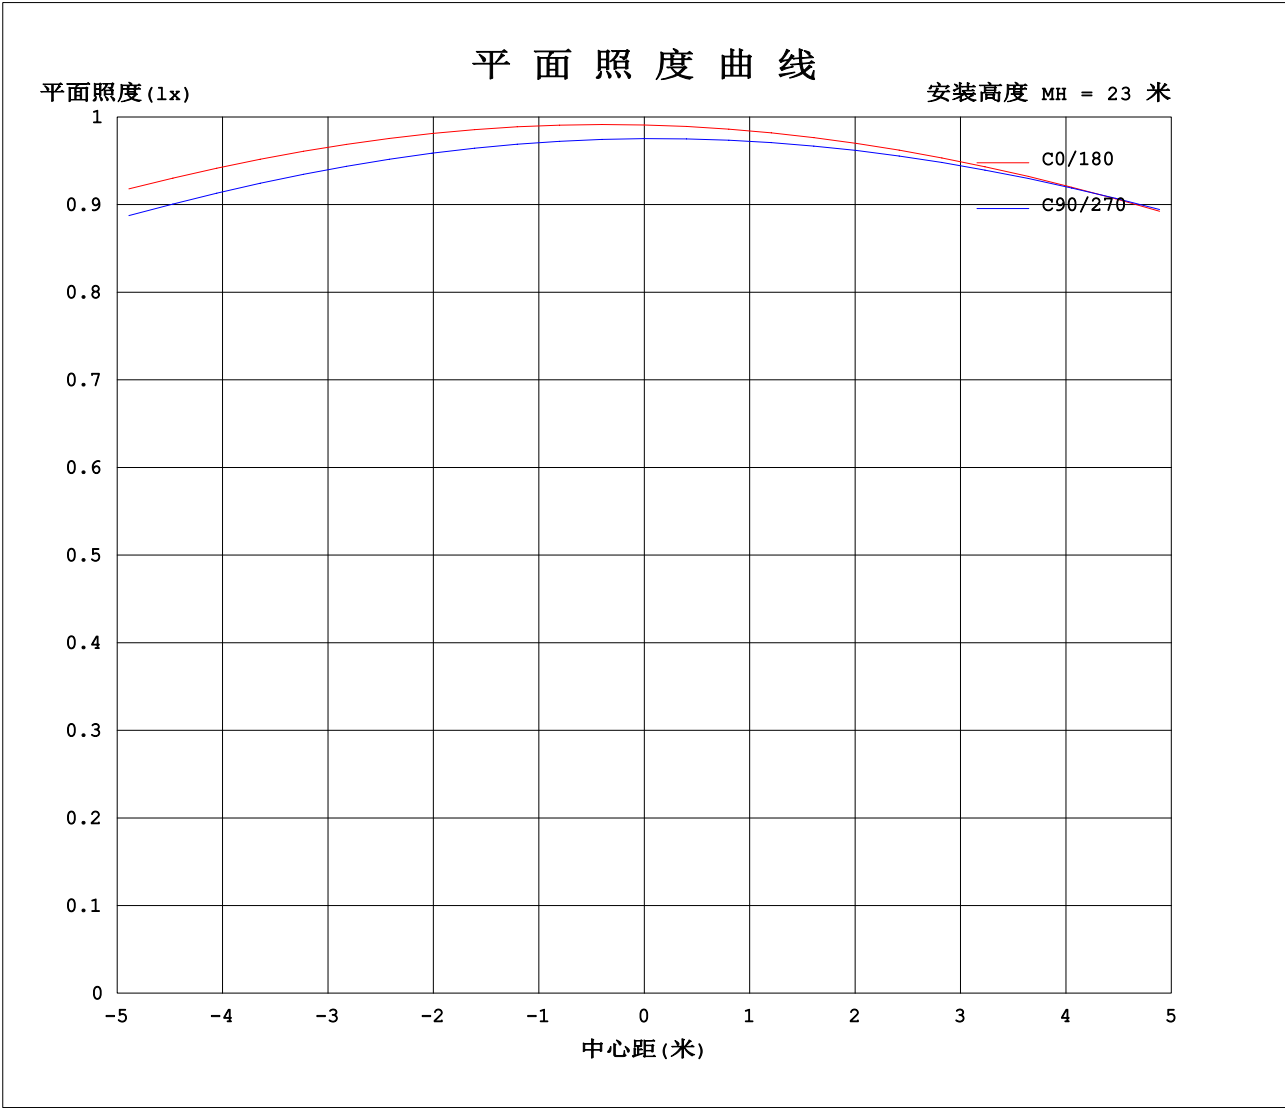


H(β) 角度范围:-90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B) 角度范围:-90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-145 20W 4000K 120D

灯 具 有 效 平 均 照 度 图

实测参数: U:222.0V I:0.1792A P:19.80W PF:0.4975 实检光通:1504.62x1 lm		
灯具名称: 118007-145	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

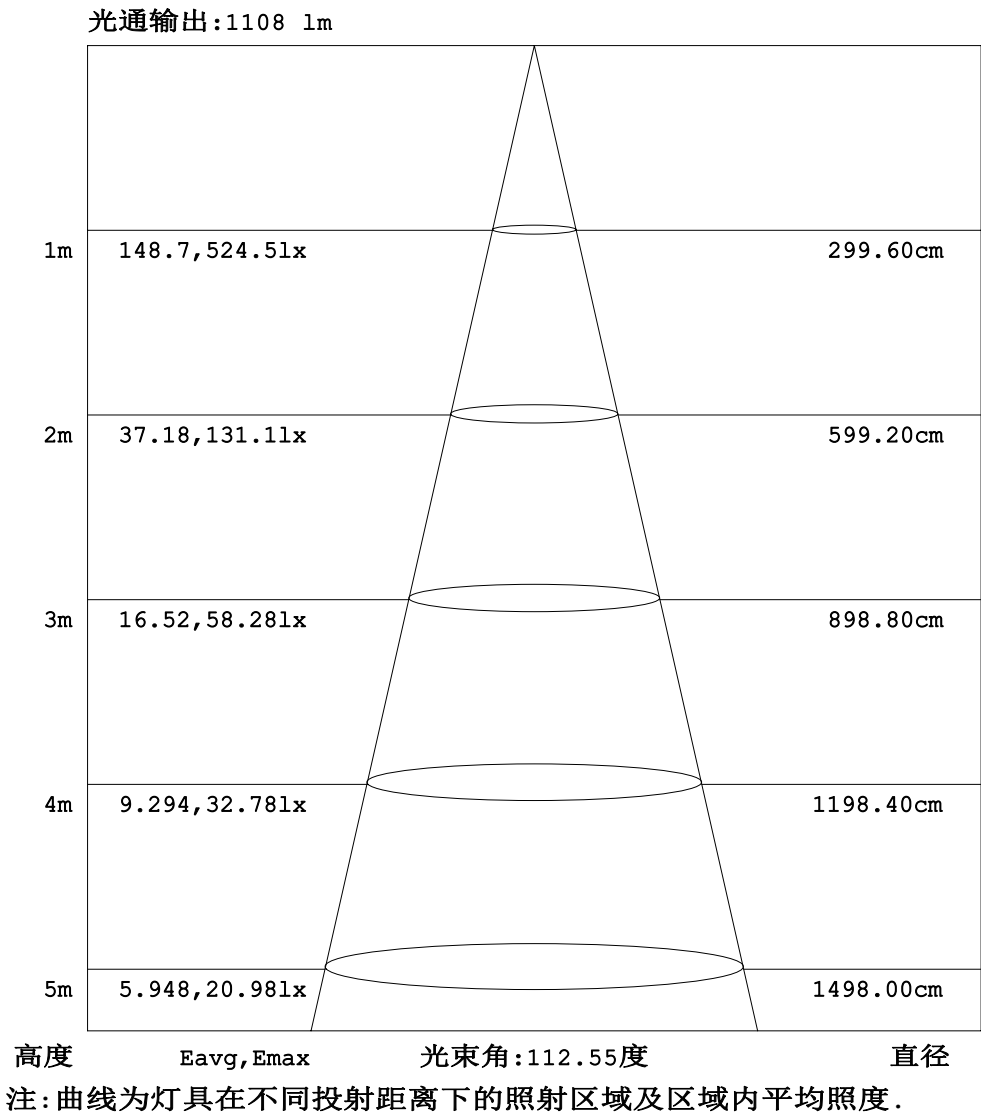

H(β) 角度范围:-90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B) 角度范围:-90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-145 20W 4000K 120D

表--1

光强分布数据表格

单位: cd

H (DEG) V (DEG)	-90	-75	-60	-45	-30	-20	-15	-10	-9	-8	-7	-6	-5	-4	-3
-90		10.09	10.52	10.47	10.42	10.37	10.34	10.32	10.31	10.31	10.30	10.29	10.29	10.28	10.28
-75		10.02	18.56	42.61	64.98	79.01	84.89	89.88	90.77	91.62	92.43	93.21	93.95	94.65	95.31
-60		18.18	69.64	124	170.7	196	206.2	214.5	216	217.3	218.6	219.7	220.8	221.9	222.8
-45		38.53	121.6	202.2	270.3	304.4	318.4	329.6	331.4	333.1	334.7	336.2	337.5	338.8	339.9
-30		57.02	165.3	265.9	349.7	391	406.7	420.1	422.3	424.4	426.3	428.1	429.7	431.1	432.4
-20		66.46	186.5	298.4	386.6	432.1	449	462.2	464.7	466.9	469	470.9	472.6	474.2	475.6
-15		69.91	194.2	310.6	402.5	446.6	464.2	477.5	479.6	481.9	484	486	487.8	489.5	490.9
-10		72.43	200	319.8	415.1	459	474.8	488.7	490.9	493	494.9	496.6	498.5	500.3	501.9
-9		72.81	200.9	321.3	417.3	461.6	476.3	490.3	492.6	494.7	496.6	498.4	500.1	501.9	503.6
-8		73.16	201.7	322.6	419.2	464	478.9	491.7	494.1	496.2	498.2	500	501.6	503.3	505
-7		73.47	202.5	323.9	421	466.3	481.6	493	495.3	497.5	499.5	501.3	503	504.5	506.3
-6		73.74	203.1	325	422.6	468.5	484.1	494	496.3	498.6	500.6	502.4	504.2	505.7	507.3
-5		73.97	203.7	325.9	424.1	470.4	486.4	496.5	497.7	499.3	501.4	503.3	505.1	506.7	508.1
-4		74.16	204.2	326.8	425.4	472.2	488.6	499.3	500.7	501.7	502.2	504	505.7	507.4	509
-3		74.31	204.5	327.5	426.5	473.9	490.7	502.1	503.6	504.8	505.6	506	506.1	507.9	509.4
-2.5		74.37	204.7	327.8	427.1	474.6	491.6	503.4	505.1	506.4	507.3	507.9	507.8	507.9	509.5
-2		74.42	204.8	328.1	427.5	475.3	492.5	504.7	506.5	507.9	509.1	509.8	510	509.5	509.5
-1.5		74.45	205	328.3	428	476	493.4	506	507.9	509.5	510.8	511.7	512.2	512.1	510.9
-1		74.48	205.1	328.5	428.4	476.6	494.2	507.2	509.3	511	512.5	513.7	514.5	514.8	514.3
-0.5		74.50	205.1	328.7	428.7	477.2	495	508.4	510.6	512.5	514.2	515.6	516.8	517.6	517.9
0	9.65	74.51	205.2	328.9	429	477.7	495.7	509.5	511.8	513.9	515.8	517.5	519.1	520.4	521.6
0.5		74.53	205.2	328.9	429	477.7	495.6	509.3	511.6	513.6	515.4	517.1	518.5	519.7	520.7
1		74.54	205.2	328.9	429	477.6	495.5	509	511.3	513.2	515	516.6	517.9	519	519.7
1.5		74.54	205.2	328.8	428.9	477.5	495.3	508.7	510.9	512.8	514.5	516	517.3	518.2	518.7
2		74.53	205.2	328.8	428.8	477.3	495	508.3	510.5	512.4	514	515.4	516.6	517.4	517.9
2.5		74.51	205.1	328.7	428.6	477	494.7	507.9	510	511.9	513.5	514.8	515.9	516.7	517.3
3		74.48	205	328.5	428.4	476.7	494.4	507.4	509.5	511.3	512.9	514.2	515.2	516.2	516.8
4		74.38	204.8	328.2	427.9	476	493.6	506.4	508.3	510.1	511.6	513	514.2	515.1	515.7
5		74.25	204.5	327.6	427.1	475.1	492.6	505.1	507	508.8	510.5	512	513.2	514	514.6
6		74.07	204.1	327	426.3	474	491.4	503.8	505.9	507.8	509.4	510.8	512	512.9	513.5
7		73.86	203.6	326.2	425.2	472.8	489.9	502.6	504.7	506.5	508.2	509.6	510.7	511.6	512.3
8		73.60	203	325.3	424	471.3	488.4	501.3	503.4	505.2	506.8	508.2	509.3	510.3	510.9
9		73.30	202.4	324.3	422.7	469.7	486.7	499.8	501.9	503.7	505.3	506.7	507.8	508.8	509.5
10		72.97	201.7	323.1	421.1	467.9	485.1	498.2	500.2	502	503.7	505	506.2	507.1	507.9
15		70.68	196.7	315.6	411	457.4	475	487.8	489.8	491.6	493.1	494.5	495.7	496.7	497.6
20		67.41	189.6	304.7	397.3	443.7	460.7	473.3	475.3	477	478.6	480.1	481.3	482.4	483.3
30		57.84	169.6	274.6	361.7	404.4	420.3	432.1	434	435.8	437.4	438.8	440.1	441.2	442.2
45		39.31	127.2	211.9	284.1	319.4	332.7	342.9	344.5	346.1	347.6	348.9	350.1	351.1	352.1
60		19.40	74.81	133.8	184.6	210.3	220.2	228.1	229.5	230.7	231.9	233	234	234.9	235.8
75		10.18	21.30	48.98	76.53	90.90	96.78	101.8	102.6	103.5	104.3	105.1	105.8	106.5	107.1
90		9.61	9.56	9.47	9.37	9.59	9.70	9.81	9.83	9.85	9.87	9.89	9.91	9.94	9.96

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员: XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-145 20W 4000K 120D

表--2

光 强 分 布 数 据 表 格

单位: cd

H (DEG) V (DEG)	-2.5	-2	-1.5	-1	-0.5	0	0.5	1	1.5	2	2.5	3	4	5	6
-90	10.28	10.27	10.27	10.27	10.26	10.26	10.29	10.31	10.34	10.37	10.39	10.42	10.47	10.53	10.58
-75	95.63	95.94	96.24	96.53	96.81	97.08	97.34	97.60	97.84	98.08	98.30	98.52	98.92	99.29	99.62
-60	223.2	223.6	224	224.4	224.7	225	225.3	225.6	225.8	226.1	226.3	226.4	226.7	227	227.1
-45	340.4	340.8	341.3	341.7	342.1	342.4	342.7	343	343.2	343.5	343.6	343.8	344	344.1	344.1
-30	433	433.6	434.1	434.6	435	435.4	435.7	436	436.2	436.4	436.6	436.7	436.9	436.8	436.7
-20	476.2	476.8	477.4	477.9	478.4	478.8	479.1	479.5	479.7	480	480.2	480.3	480.5	480.5	480.3
-15	491.6	492.3	492.8	493.4	493.9	494.3	494.7	495.1	495.4	495.7	495.9	496.1	496.3	496.3	496.2
-10	502.7	503.4	504.1	504.7	505.3	505.8	506.2	506.7	507	507.4	507.7	507.9	508.2	508.3	508.3
-9	504.4	505.1	505.8	506.4	507	507.5	508	508.5	508.9	509.2	509.5	509.8	510.2	510.4	510.4
-8	505.8	506.6	507.3	508	508.6	509.1	509.7	510.2	510.6	511	511.3	511.6	512	512.2	512.4
-7	507.1	507.9	508.6	509.3	510	510.6	511.2	511.7	512.1	512.5	512.9	513.2	513.7	514	514.2
-6	508.2	509	509.8	510.5	511.2	511.9	512.5	513.1	513.6	514	514.4	514.7	515.3	515.8	515.9
-5	509	509.9	510.7	511.5	512.3	513	513.7	514.3	514.9	515.4	515.8	516.2	516.9	517.4	517.6
-4	509.6	510.5	511.4	512.3	513.1	514	514.7	515.5	516.1	516.7	517.2	517.7	518.5	519	519.2
-3	510.2	510.9	511.7	512.7	513.8	514.7	515.7	516.6	517.3	518.1	518.8	519.3	520.1	520.6	520.7
-2.5	510.2	511	511.8	512.8	513.9	515	516.1	517.1	518	518.9	519.6	520.1	520.9	521.3	521.3
-2	510.2	511	511.8	512.8	514	515.3	516.6	517.8	518.8	519.7	520.4	521	521.7	522	522
-1.5	510.1	510.9	511.7	512.6	513.9	515.5	517.2	518.6	519.8	520.7	521.4	521.9	522.6	522.8	522.7
-1	513.5	512.1	511.4	512.3	513.6	515.7	518	519.8	521.1	521.9	522.5	523	523.4	523.6	523.4
-0.5	517.7	517.2	515.9	513.1	512.8	515.9	519.7	521.7	522.8	523.4	523.8	524.1	524.3	524.3	524.1
0	522.2	522.7	523.1	523.6	523.9	524.3	524.5	524.8	524.9	525.1	525.2	525.3	525.3	525.1	524.7
0.5	521	521.2	521.1	520.6	519.3	516	513.6	514.5	517.8	519.7	520.8	521.6	522.5	522.9	522.9
1	519.8	519.8	519.5	519	517.8	516.1	514.6	513.9	513.6	514.9	516.8	518.1	519.8	520.7	521
1.5	518.8	518.8	518.6	518	517.1	516	515.1	514.4	514.1	513.8	513.7	515	517.3	518.6	519.2
2	518.1	518.1	517.8	517.3	516.7	516	515.3	514.8	514.4	514.2	514	513.8	514.9	516.6	517.5
2.5	517.4	517.4	517.2	516.9	516.4	515.8	515.4	515	514.6	514.4	514.1	514	513.6	514.7	515.8
3	516.9	516.9	516.7	516.5	516.1	515.7	515.4	515	514.7	514.5	514.3	514.1	513.7	513.2	514.2
4	515.8	515.8	515.8	515.7	515.5	515.3	515.1	514.9	514.7	514.5	514.3	514.1	513.6	513.1	512.6
5	514.8	514.9	514.9	514.9	514.8	514.7	514.6	514.5	514.3	514.2	514.1	513.9	513.4	512.9	512.3
6	513.7	513.8	513.9	514	514	513.9	513.9	513.8	513.7	513.6	513.5	513.4	513	512.4	511.8
7	512.5	512.7	512.8	512.9	513	512.9	513	512.9	512.9	512.8	512.7	512.6	512.4	511.8	511.1
8	511.2	511.4	511.6	511.7	511.8	511.8	511.8	511.9	511.9	511.8	511.7	511.6	511.4	510.9	510.3
9	509.8	510	510.2	510.4	510.5	510.6	510.6	510.7	510.7	510.6	510.6	510.5	510.2	509.9	509.2
10	508.2	508.4	508.6	508.8	508.9	509	509.1	509.2	509.2	509.2	509.2	509.1	508.9	508.5	508
15	498	498.3	498.6	498.8	499	499.2	499.3	499.5	499.5	499.6	499.6	499.6	499.4	499.2	498.8
20	483.8	484.1	484.4	484.7	485	485.2	485.4	485.5	485.7	485.7	485.8	485.8	485.7	485.4	485.1
30	442.6	443	443.3	443.7	443.9	444.2	444.4	444.6	444.8	444.9	445	445.1	445.1	445	444.7
45	352.5	352.9	353.3	353.6	353.9	354.2	354.5	354.7	354.9	355.1	355.2	355.4	355.5	355.5	355.4
60	236.1	236.5	236.8	237.2	237.5	237.7	238	238.3	238.5	238.7	238.9	239.1	239.4	239.6	239.7
75	107.4	107.7	108	108.3	108.6	108.8	109.1	109.4	109.6	109.8	110.1	110.3	110.7	111	111.3
90	9.97	9.98	9.99	10.00	10.01	10.02	10.07	10.12	10.17	10.22	10.27	10.33	10.43	10.53	10.63

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-145 20W 4000K 120D

表--3

光 强 分 布 数 据 表 格

单位: cd

H (DEG) V (DEG)	7	8	9	10	15	20	30	45	60	75	90				
-90	10.63	10.68	10.74	10.79	11.05	11.32	11.84	13.00	14.15	15.43					
-75	99.90	100.2	100.4	100.5	100.8	100.1	95.97	83.36	64.30	38.39					
-60	227.1	227.1	227	226.7	224.4	220.3	205.9	171.9	123.9	66.22					
-45	343.9	343.7	343.3	342.8	338.1	330.8	307.9	254.4	179.2	91.49					
-30	436.3	435.9	435.3	434.5	428.4	418.9	389.7	320.1	223.9	112.1					
-20	480	479.5	478.9	478.1	471.9	461.8	429.5	350.7	245.6	122					
-15	495.9	495.5	494.9	494.2	488.1	477.8	443.3	362	253.5	125.7					
-10	508.2	507.9	507.4	506.7	500.7	489.6	453.7	370.6	259.4	128.4					
-9	510.3	510.1	509.5	508.8	502.7	491.4	455.4	371.9	260.4	128.8					
-8	512.3	512	511.6	510.8	504.5	493	456.9	373.1	261.2	129.2					
-7	514.2	513.9	513.4	512.7	506	494.5	458.3	374.2	262	129.5					
-6	515.9	515.7	515.1	514.5	507.5	495.9	459.5	375.2	262.7	129.8					
-5	517.6	517.3	516.8	515.9	508.8	497.2	460.7	376.1	263.3	130					
-4	519.1	518.7	518.1	517.2	510	498.3	461.7	376.9	263.8	130.3					
-3	520.5	520	519.3	518.4	511.1	499.3	462.5	377.5	264.3	130.4					
-2.5	521.1	520.6	519.9	519	511.6	499.7	462.9	377.8	264.5	130.5					
-2	521.8	521.2	520.5	519.6	512.1	500.1	463.3	378.1	264.6	130.6					
-1.5	522.4	521.8	521.1	520.1	512.5	500.5	463.6	378.3	264.8	130.6					
-1	523	522.4	521.6	520.6	512.9	500.9	463.8	378.5	264.9	130.6					
-0.5	523.6	523	522.1	521.1	513.3	501.2	464.1	378.6	265	130.7					
0	524.2	523.5	522.6	521.5	513.7	501.5	464.3	378.8	265.1	130.7	16.71				
0.5	522.6	522.1	521.4	520.4	513	501	464	378.6	265	130.6					
1	521	520.7	520.1	519.3	512.2	500.4	463.7	378.5	264.9	130.6					
1.5	519.5	519.3	518.9	518.2	511.4	499.8	463.3	378.3	264.7	130.5					
2	517.9	518	517.6	517	510.6	499.2	462.9	378	264.5	130.4					
2.5	516.4	516.6	516.4	515.9	509.8	498.6	462.5	377.8	264.3	130.4					
3	514.9	515.2	515.1	514.7	509	497.9	462	377.5	264.1	130.3					
4	512.1	512.6	512.7	512.5	507.2	496.5	461	376.8	263.6	130					
5	511.6	510.8	510.3	510.2	505.3	495	459.8	376	263.1	129.8					
6	511.1	510.2	509.2	508.1	503.4	493.3	458.5	375.1	262.4	129.5					
7	510.4	509.5	508.5	507.3	501.5	491.6	457.1	374.1	261.7	129.1					
8	509.5	508.6	507.6	506.4	499.4	489.7	455.6	373	260.8	128.7					
9	508.4	507.5	506.4	505.3	497.4	487.8	453.9	371.7	259.9	128.3					
10	507.2	506.3	505.2	504	496	485.7	452.1	370.4	258.9	127.8					
15	498.2	497.6	496.5	495.3	487.1	475.2	441.3	361.9	252.7	124.9					
20	484.6	483.9	483.2	482.2	474.2	462.3	427.6	350.7	244.3	121					
30	444.3	443.8	443.1	442.2	436	425	392.3	320.7	221.5	110.8					
45	355.2	354.8	354.4	353.8	349.3	341.8	316.1	254.6	174.1	90.53					
60	239.7	239.7	239.5	239.3	237	232.6	216.3	172.1	118.6	66.26					
75	111.6	111.8	112	112.2	112.4	111.7	106.9	87.18	64.39	39.78					
90	10.73	10.83	10.93	11.03	11.54	12.04	13.05	13.77	14.50	15.60					

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员: XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-145 20W 4000K 120D