

投光灯具参数概要:


报告中的参数折算为光源光通为1000lm条件下.

最大光强 (Luminaire orientation as tested.)		352.8 cd/1000lm.
		0.0 度 (垂直)
		0.0 度 (水平)
光束角	10% Imax	161.2V x 160.6H
	50% Imax	112.2V x 112.9H
	90% Imax	45.6V x 48.9H
光束内光通	总计	1000.0 lm/1000lm.
	至 10% Imax	986.2 lm/1000lm.
	至 50% Imax	738.8 lm/1000lm.
	至 90% Imax	189.4 lm/1000lm
	上射 LOR	0.0 %
	下射 LOR	100.0 %
灯具效率(光输出比)		100.0 %

H(β)角度范围:-90度 - 90度	V(B)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度	V(B)角度间隔: 0.5度
测试速度: 快速	测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境温度:25.3℃	环境湿度:65.0%
测试人员:XGZ	测试距离:6.350米 [K=1.0000]
测试日期:2024-03-15	备注: 118007-180 30W 4000K 120D

灯 具 光 度 数 据

实测参数: U:221.9V I:0.2985A P:29.88W PF:0.4510 实检光通:2646.8x1 lm		
灯具名称: 118007-180	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

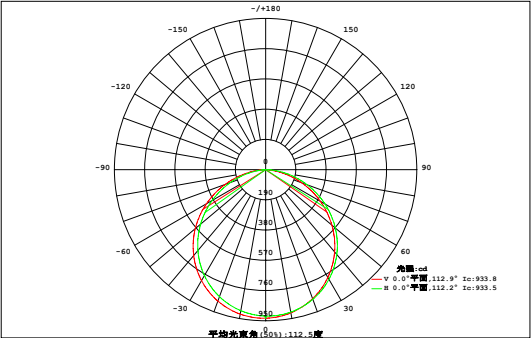

光源数据		光度数据 光效:88.60lm/W	
型号		峰值光强(cd)	933.8
标称功率(W)	30	有效效率(%)	98.6
额定电源电压(V)	220	有效光通(lm)	2610
额定光通量(lm)	2646.8	灯具效率(%)	100.0
灯具内光源数(只)	1	总光通量(lm)	2647
实测电源电压(V)	220	50%光束角(H,V)	113°,112°

垂 直 角 度 V (°)	区 域 光 通 量																单位:lm		Φ总	Φ有
	0.01	0.08	0.24	0.49	0.80	1.15	1.43	1.59	1.64	1.56	1.35	1.06	0.75	0.44	0.20	0.07	0.03	0.01	12.9	2.93
90	0.01	0.08	0.24	0.49	0.80	1.15	1.43	1.59	1.64	1.56	1.35	1.06	0.75	0.44	0.20	0.07	0.03	0.01	12.9	2.93
80	0.03	0.28	0.89	1.82	2.93	4.10	5.10	5.76	6.06	5.94	5.40	4.53	3.45	2.30	1.27	0.50	0.10	0.01	50.5	46.4
70	0.06	0.53	1.64	3.28	5.21	7.21	8.95	10.1	10.7	10.6	9.78	8.38	6.54	4.55	2.69	1.22	0.31	0.02	91.8	90.4
60	0.09	0.79	2.38	4.69	7.41	10.2	12.6	14.3	15.2	15.1	14.0	12.0	9.49	6.71	4.07	1.95	0.55	0.03	132	131
50	0.11	1.02	3.06	5.99	9.42	12.9	16.0	18.1	19.2	19.1	17.7	15.3	12.1	8.65	5.34	2.63	0.79	0.05	168	167
40	0.14	1.23	3.64	7.09	11.1	15.2	18.7	21.4	22.6	22.5	20.9	18.1	14.4	10.3	6.44	3.21	1.00	0.07	198	198
30	0.16	1.39	4.10	7.95	12.4	16.9	20.9	23.8	25.2	25.0	23.3	20.2	16.1	11.6	7.31	3.66	1.16	0.09	221	221
20	0.17	1.50	4.41	8.54	13.3	18.2	22.4	25.5	27.0	26.7	24.8	21.6	17.3	12.6	7.91	3.98	1.27	0.10	237	237
10	0.17	1.56	4.56	8.83	13.8	18.8	23.2	26.3	27.9	27.5	25.8	22.5	18.1	13.1	8.22	4.13	1.33	0.11	246	246
0	0.17	1.55	4.53	8.78	13.7	18.6	22.9	26.0	27.5	27.6	25.9	22.5	18.1	13.1	8.20	4.12	1.32	0.11	245	244
-10	0.17	1.48	4.33	8.38	13.1	17.7	21.8	24.8	26.4	26.4	24.8	21.6	17.3	12.5	7.86	3.94	1.26	0.10	234	234
-20	0.15	1.35	3.98	7.70	12.0	16.3	20.1	22.9	24.5	24.4	22.8	19.9	15.9	11.5	7.22	3.61	1.14	0.09	216	215
-30	0.13	1.17	3.48	6.76	10.6	14.4	17.8	20.3	21.7	21.6	20.1	17.5	14.0	10.1	6.31	3.13	0.97	0.07	190	190
-40	0.11	0.95	2.87	5.60	8.79	12.0	14.8	17.0	18.1	18.0	16.8	14.5	11.6	8.34	5.17	2.53	0.75	0.05	158	157
-50	0.08	0.70	2.16	4.27	6.75	9.25	11.4	13.1	14.0	13.9	12.9	11.1	8.82	6.30	3.86	1.84	0.51	0.03	121	120
-60	0.05	0.46	1.39	2.83	4.53	6.25	7.75	8.88	9.45	9.36	8.64	7.37	5.80	4.08	2.43	1.10	0.26	0.02	80.6	78.9
-70	0.03	0.23	0.69	1.37	2.26	3.18	3.99	4.55	4.81	4.71	4.28	3.56	2.71	1.83	1.00	0.38	0.08	0.01	39.7	32.1
-80	0.01	0.06	0.16	0.30	0.45	0.60	0.73	0.82	0.84	0.79	0.67	0.51	0.35	0.22	0.12	0.06	0.03	0.01	6.71	0.00
-90	-90	-80	-70	-60	-50	-40	-30	-20	横 向 角 度 H (°)	20	30	40	50	60	70	80	90			
Φ总	1.83	16.3	48.5	94.6	149	203	251	285	303	301	280	242	193	138	85.6	42.1	12.9	0.98	2647	---
Φ有	0.23	13.9	46.3	92.5	146	201	249	283	301	299	278	240	191	136	83.5	39.9	10.2	0.00	---	2610

半边峰角: U:55.0,D:57.8 , L:56.9,R:56.6 NEMA Beam Type: Type 7

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-180 30W 4000K 120D

灯 具 等 光 强 曲 线


实测参数: U:221.9V I:0.2985A P:29.88W PF:0.4510 实检光通:2646.8x1 lm		
灯具名称: 118007-180	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

锥面光通量(90度):

1419.8 lm
%lum = 53.6%
%lamp = 53.6%

锥面光通量(120度):

2089.2 lm
%lum = 78.9%
%lamp = 78.9%

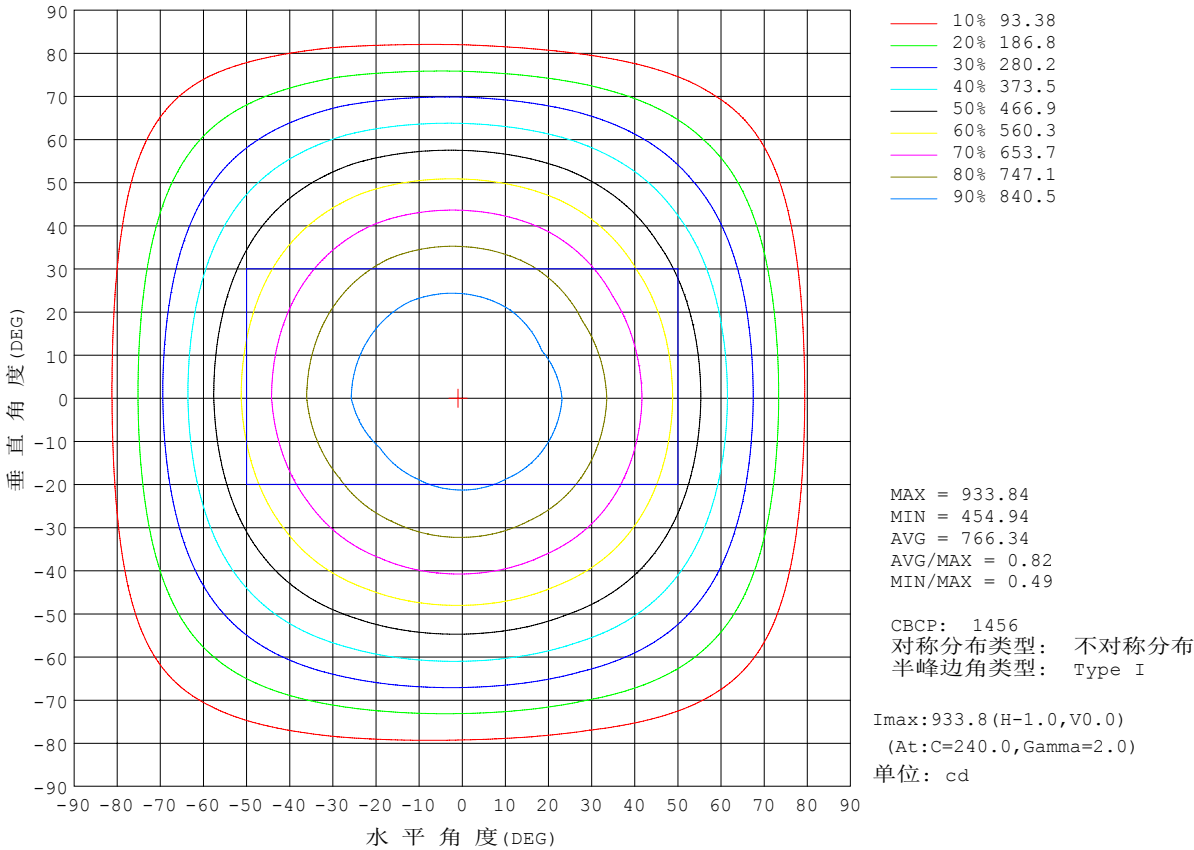


H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-180 30W 4000K 120D

平面等照度曲线


实测参数: U:221.9V I:0.2985A P:29.88W PF:0.4510 实检光通:2646.8x1 lm		
灯具名称: 118007-180	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

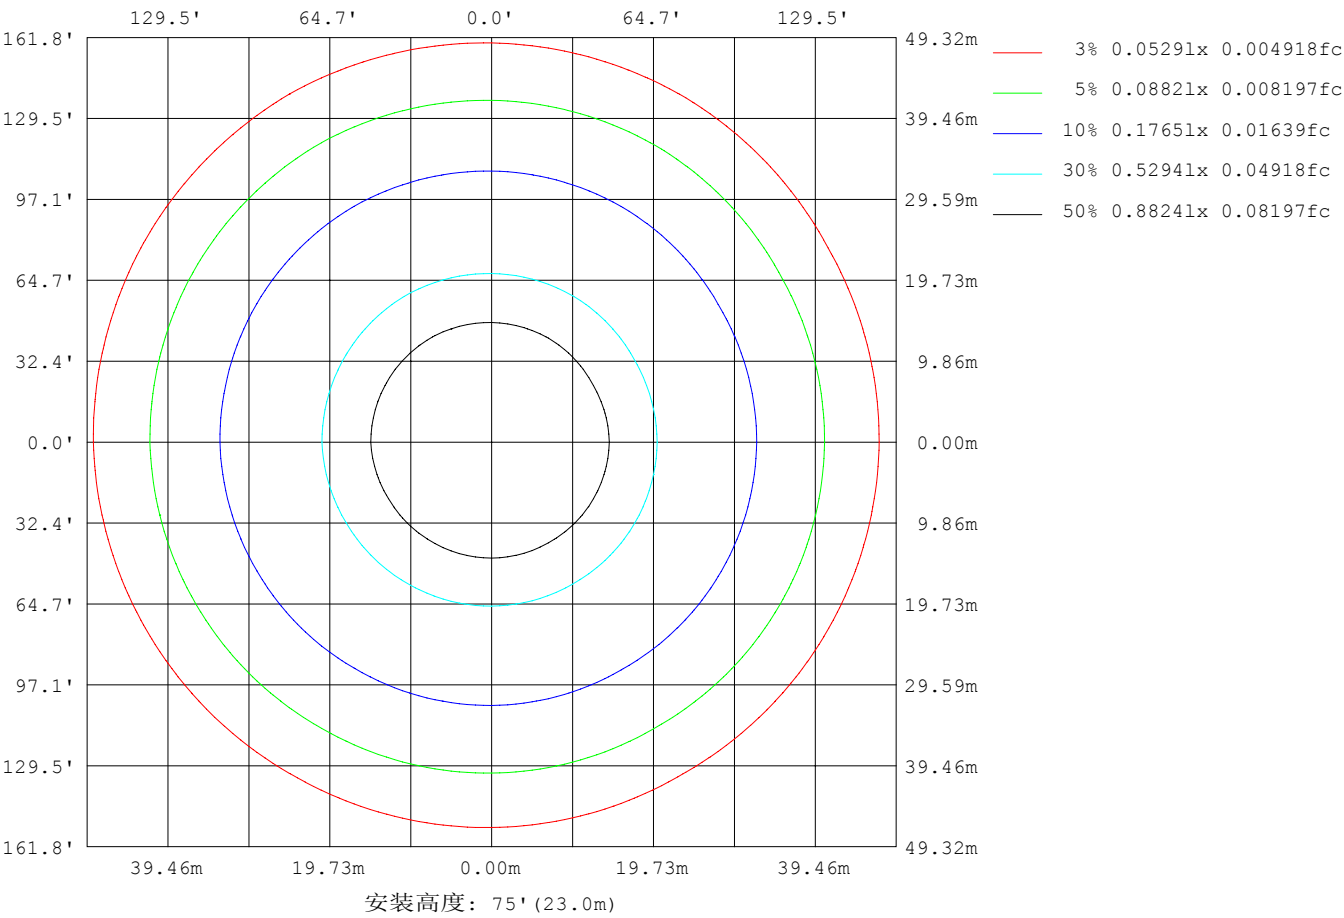

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-180 30W 4000K 120D

平面照度曲线

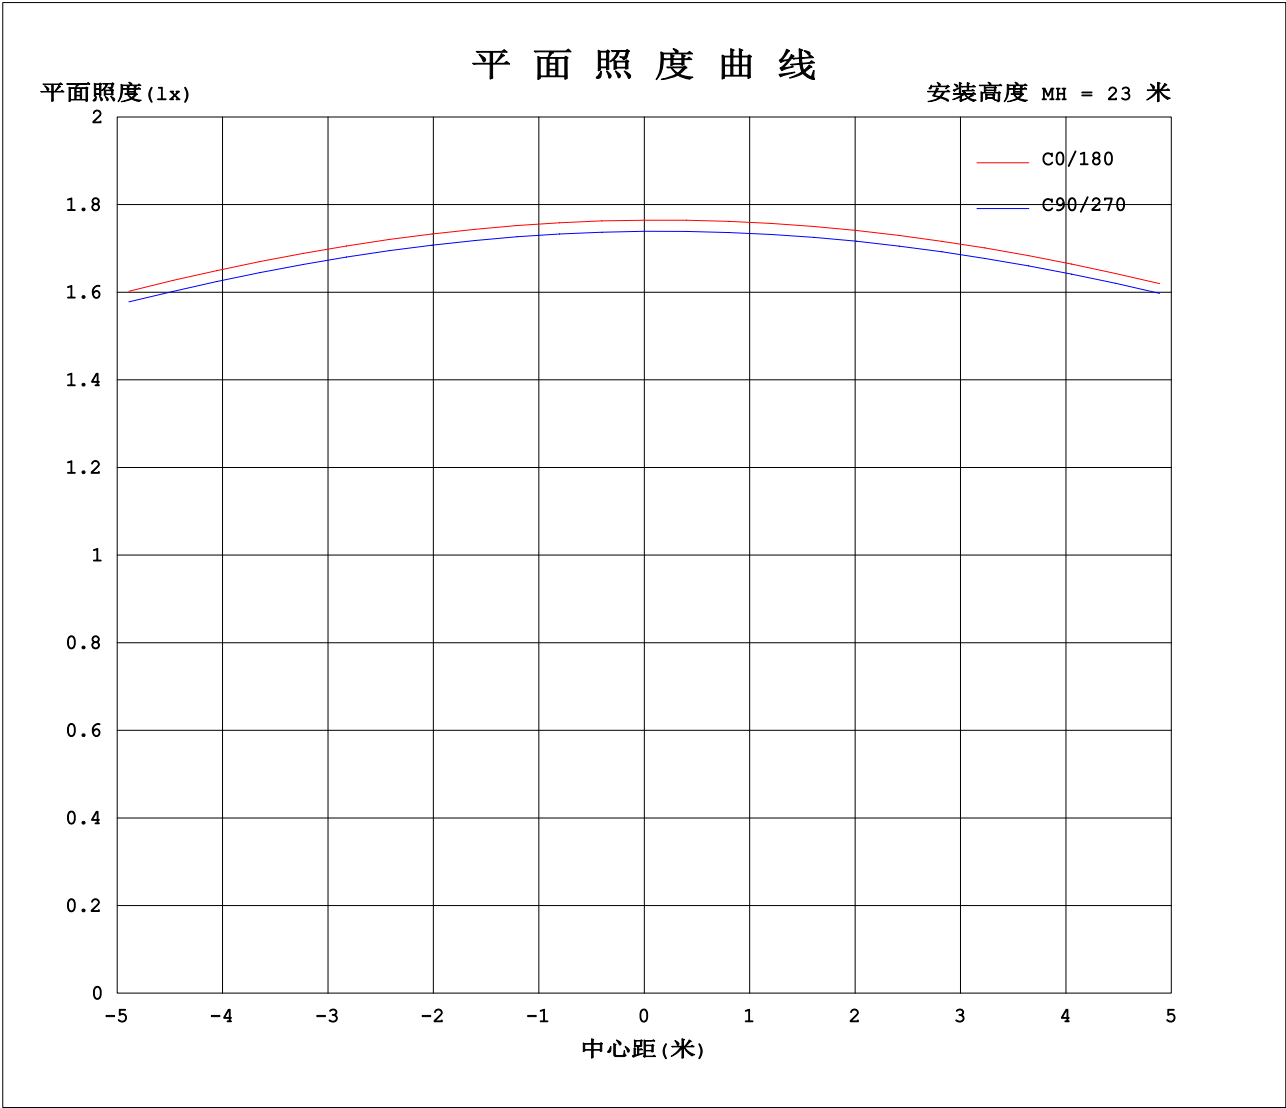


H(β) 角度范围: -90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: XGZ
测试日期: 2024-03-15

V(B) 角度范围: -90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1 系统 V2.0.293
环境湿度: 65.0%
测试距离: 6.350米 [K=1.0000]
备注: 118007-180 30W 4000K 120D

灯 具 有 效 平 均 照 度 图

实测参数: U:221.9V I:0.2985A P:29.88W PF:0.4510 实检光通:2646.8x1 lm		
灯具名称: 118007-180	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: SEITY	发光口面:	遮光角:

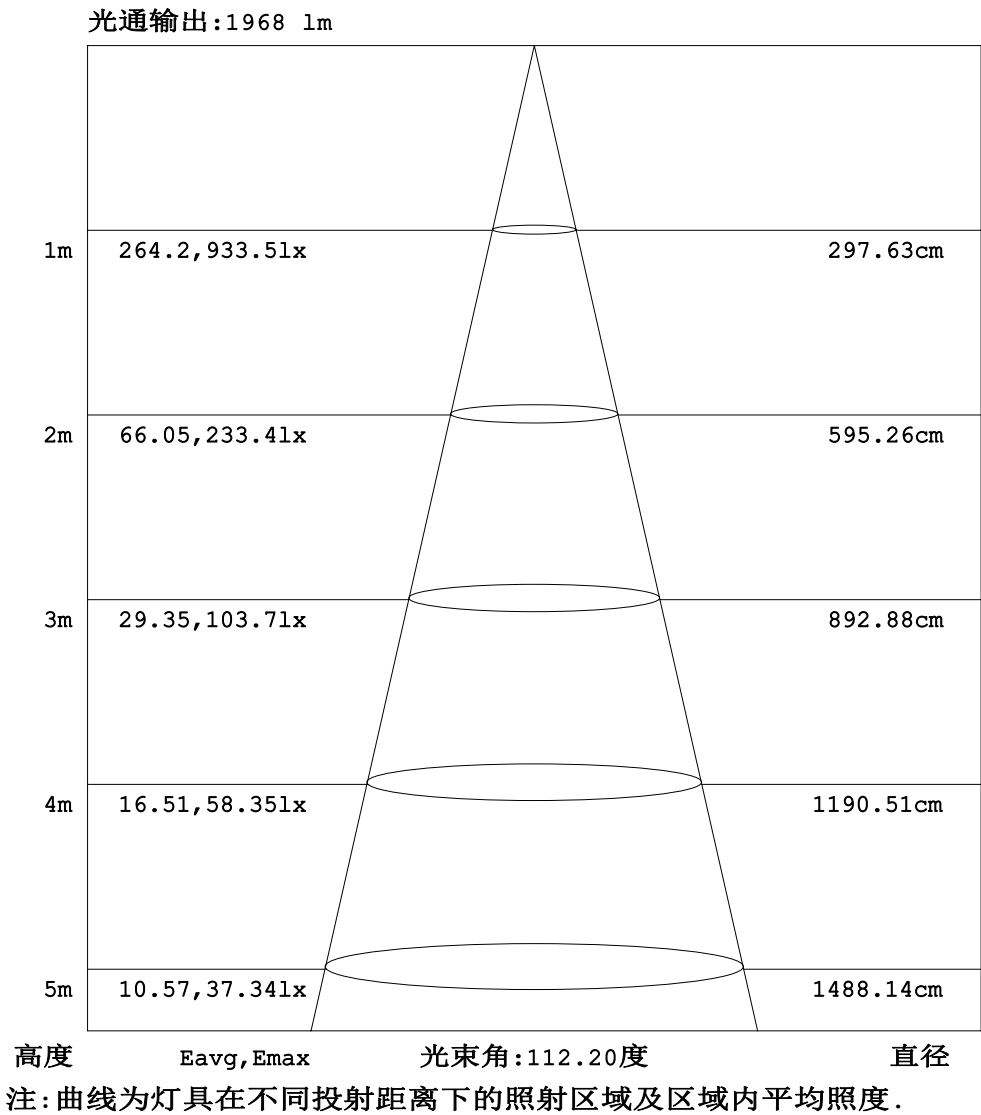

H(β) 角度范围:-90度 - 90度
H(β) 角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B) 角度范围:-90度 - 90度
V(B) 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-180 30W 4000K 120D

表--1

光强分布数据表格

单位: cd

H (DEG) V (DEG)	-90	-75	-60	-45	-30	-20	-15	-10	-9	-8	-7	-6	-5	-4	-3
-90		2.99	2.53	2.41	2.29	2.35	2.38	2.41	2.41	2.42	2.42	2.43	2.44	2.44	2.45
-75		26.99	63.58	103.8	136.9	150.4	154.8	157.6	158	158.3	158.5	158.6	158.7	158.7	158.7
-60		69.85	171	262.6	332	364.4	375.9	383.9	385	386	386.9	387.6	388.2	388.6	388.9
-45		114.2	271.1	408.7	512.7	560.6	578.7	591.6	593.5	595.1	596.5	597.8	598.8	599.5	600.1
-30		153.7	352.7	526.1	657.8	718.3	739.9	756.6	759.1	761.4	763.4	765	766.4	767.6	768.4
-20		172.7	392.6	584.8	726.9	794	817.3	834.1	836.9	839.4	841.7	843.7	845.3	846.7	847.8
-15		179.6	407.5	607.2	755.4	821.1	845.1	862.3	864.9	867.5	869.8	871.8	873.7	875.2	876.5
-10		184.7	418.7	624.6	778.2	843.7	865.5	883	885.6	888.1	890.3	892.1	894	895.7	897.2
-9		185.5	420.6	627.4	782.1	848.3	868.6	886.1	888.8	891.3	893.4	895.3	897	898.9	900.4
-8		186.3	422.2	630.1	785.8	852.6	873.1	888.9	891.7	894.1	896.3	898.3	899.9	901.6	903.2
-7		186.9	423.7	632.5	789.1	856.8	877.7	891.5	894.2	896.6	898.8	900.8	902.5	904	905.7
-6		187.5	425.1	634.7	792.3	860.6	882.1	893.6	896.3	898.8	901	902.9	904.7	906.2	907.7
-5		188.1	426.3	636.8	795.1	864.3	886.3	898.1	899	900.5	902.7	904.7	906.5	908	909.5
-4		188.5	427.4	638.6	797.8	867.7	890.3	903	904.2	904.7	904.5	906.1	907.8	909.4	910.9
-3		188.9	428.3	640.2	800.2	870.8	894.1	907.9	909.3	910.1	910.3	909.7	908.7	910.3	911.7
-2.5		189	428.6	640.9	801.3	872.3	895.9	910.3	911.9	912.9	913.3	913	911.7	910.5	911.9
-2		189.2	429	641.6	802.3	873.7	897.7	912.7	914.5	915.7	916.4	916.3	915.4	913.2	911.9
-1.5		189.3	429.3	642.2	803.3	875.1	899.4	915.1	917	918.5	919.5	919.8	919.4	917.8	914.4
-1		189.4	429.6	642.7	804.2	876.4	901.1	917.4	919.5	921.3	922.5	923.3	923.4	922.6	920.3
-0.5		189.4	429.8	643.2	805	877.6	902.6	919.6	922	924.1	925.6	926.8	927.5	927.6	926.8
0	3.45	189.5	430	643.7	805.8	878.8	904.1	921.8	924.4	926.8	928.7	930.3	931.6	932.7	933.5
0.5		189.6	430.1	643.7	805.7	878.7	903.9	921.4	924	926.2	928	929.6	930.7	931.5	931.9
1		189.6	430.1	643.6	805.6	878.4	903.6	920.9	923.4	925.6	927.3	928.8	929.8	930.3	930.3
1.5		189.6	430.1	643.5	805.4	878.1	903.2	920.3	922.8	924.9	926.6	927.9	928.8	929.1	928.8
2		189.6	430	643.3	805.1	877.8	902.8	919.7	922.1	924.2	925.8	927	927.8	928	927.6
2.5		189.5	429.9	643.1	804.8	877.3	902.3	919	921.4	923.4	925	926.1	926.8	927	926.6
3		189.5	429.7	642.8	804.4	876.8	901.7	918.3	920.6	922.6	924.1	925.2	925.9	926.1	925.7
4		189.3	429.3	642.1	803.4	875.6	900.3	916.7	919	920.9	922.3	923.5	924.1	924.3	924
5		189.1	428.8	641.2	802.2	874.2	898.8	914.9	917.1	919	920.5	921.6	922.4	922.6	922.4
6		188.8	428.1	640	800.7	872.5	896.9	912.9	915.2	917.1	918.6	919.7	920.4	920.8	920.6
7		188.4	427.2	638.6	798.9	870.5	894.8	910.8	913	914.9	916.5	917.7	918.4	918.8	918.5
8		188	426.2	637	796.9	868.2	892.4	908.5	910.7	912.6	914.2	915.4	916.3	916.6	916.3
9		187.4	425	635.2	794.6	865.8	889.8	905.9	908.2	910.1	911.7	912.9	913.8	914	913.8
10		186.8	423.7	633.2	792	862.9	887	903.1	905.4	907.3	908.9	910.2	910.9	911.1	911
15		182.7	414.7	619.9	775.5	845.2	869.1	885.3	887.7	889.6	890.9	891.9	892.6	893	893.1
20		176.8	402.1	601.3	752.7	821.2	844.5	860.4	862.4	864	865.4	866.4	867.2	867.8	868.1
30		160	366.2	549.7	688.8	752.8	774.8	788.2	790.1	791.8	793.2	794.3	795.2	795.8	796.1
45		123.7	289.4	438	551.2	602.7	619.2	630.1	631.7	633.1	634.3	635.2	636	636.5	636.8
60		79.88	191.9	294.2	374.2	408.3	419	426.3	427.3	428.2	428.9	429.5	429.9	430.2	430.3
75		33.20	85.97	136	176.7	191.6	196.1	198.9	199.3	199.6	199.8	199.9	200	200	199.9
90		4.06	4.67	4.90	5.13	4.97	4.89	4.81	4.80	4.78	4.76	4.75	4.73	4.72	4.70

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员: XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-180 30W 4000K 120D

表--2

光 强 分 布 数 据 表 格

单位: cd

H (DEG) V (DEG)	-2.5	-2	-1.5	-1	-0.5	0	0.5	1	1.5	2	2.5	3	4	5	6
-90	2.45	2.45	2.46	2.46	2.46	2.46	2.46	2.46	2.47	2.47	2.47	2.47	2.47	2.47	2.47
-75	158.6	158.5	158.4	158.3	158.2	158	157.9	157.7	157.5	157.3	157.1	156.8	156.3	155.6	155
-60	388.9	389	389	388.9	388.8	388.7	388.6	388.4	388.2	387.9	387.6	387.3	386.5	385.6	384.5
-45	600.3	600.4	600.5	600.5	600.5	600.4	600.3	600.1	599.9	599.6	599.2	598.8	597.8	596.6	595.2
-30	768.7	769	769.2	769.3	769.3	769.3	769.2	769	768.8	768.5	768.1	767.6	766.5	765.1	763.4
-20	848.2	848.5	848.8	849	849.1	849.1	849.1	848.9	848.7	848.5	848.1	847.7	846.6	845.1	843.4
-15	877	877.4	877.8	878	878.2	878.3	878.3	878.3	878.1	877.9	877.5	877.1	876	874.5	872.8
-10	897.9	898.4	898.9	899.3	899.7	899.9	900	900	900	899.8	899.5	899.2	898.2	896.8	895.3
-9	901.1	901.6	902.2	902.6	902.9	903.2	903.4	903.5	903.5	903.4	903.2	902.8	901.9	900.5	899.2
-8	903.9	904.6	905.1	905.6	906	906.3	906.5	906.7	906.7	906.6	906.4	906.2	905.4	904.2	903
-7	906.4	907.1	907.8	908.3	908.8	909.2	909.5	909.6	909.7	909.6	909.4	909.2	908.3	907.7	906.6
-6	908.6	909.3	910	910.6	911.1	911.6	912	912.2	912.4	912.4	912.3	912	911.5	910.9	909.8
-5	910.3	911.1	911.8	912.5	913.2	913.7	914.2	914.6	914.8	914.9	914.9	914.8	914.7	914	912.9
-4	911.5	912.4	913.3	914.1	914.9	915.7	916.3	916.8	917.2	917.4	917.5	917.8	917.6	916.9	915.6
-3	912.5	913.2	914.1	915.1	916.2	917.3	918.2	918.9	919.4	920	920.5	920.7	920.5	919.6	918.3
-2.5	912.6	913.4	914.2	915.4	916.6	917.9	919	920	920.7	921.5	922	922.2	921.9	921	919.6
-2	912.6	913.4	914.2	915.3	916.9	918.5	920	921.2	922.3	923.1	923.6	923.7	923.4	922.4	920.9
-1.5	912.4	913.1	914	915.1	916.8	919	921.1	922.7	924.1	924.9	925.3	925.4	924.9	923.8	922.1
-1	918.2	915.2	913.3	914.4	916.3	919.4	922.6	924.9	926.3	927	927.3	927.3	926.5	925.1	923.3
-0.5	925.7	924	921.1	915.6	914.7	919.7	925.6	928.1	929.2	929.5	929.4	929.1	927.9	926.3	924.4
0	933.6	933.7	933.8	933.8	933.7	933.5	933.3	933	932.6	932.1	931.6	931	929.3	927.5	925.4
0.5	931.7	931.4	930.7	929.2	926.4	920.2	914.8	915.2	920.3	922.8	924.1	924.8	924.7	923.9	922.5
1	929.9	929.2	928.2	926.6	923.9	920.4	917	914.6	912.9	914.4	917.2	918.9	920.2	920.2	919.4
1.5	928.3	927.6	926.6	925	922.9	920.4	918	915.9	914.3	912.9	911.8	913.4	915.9	916.6	916.4
2	927.1	926.4	925.4	924	922.3	920.3	918.4	916.7	915.1	913.8	912.6	911.4	911.7	913.2	913.4
2.5	926.1	925.4	924.5	923.2	921.8	920.2	918.6	917.1	915.7	914.4	913.1	911.9	909.5	909.8	910.4
3	925.3	924.6	923.7	922.6	921.4	920	918.7	917.3	916	914.8	913.5	912.3	909.9	907.4	907.6
4	923.6	923	922.3	921.5	920.5	919.5	918.4	917.3	916.1	915	913.9	912.7	910.2	907.7	905.1
5	922	921.5	920.9	920.2	919.4	918.6	917.6	916.7	915.7	914.6	913.6	912.5	910.1	907.6	904.9
6	920.2	919.8	919.2	918.6	918	917.2	916.4	915.6	914.7	913.8	912.8	911.8	909.6	907.1	904.3
7	918.2	917.8	917.4	916.9	916.3	915.7	915	914.2	913.4	912.5	911.6	910.6	908.6	906.1	903.4
8	916	915.7	915.3	914.9	914.3	913.7	913.1	912.4	911.7	910.9	910	909.1	907.1	904.7	902
9	913.6	913.4	913.1	912.7	912.2	911.7	911.1	910.4	909.7	908.9	908	907.1	905.2	903	900.3
10	910.9	910.7	910.4	910	909.6	909.1	908.5	907.9	907.2	906.5	905.7	904.8	902.9	900.7	898.2
15	893.1	893	892.8	892.6	892.2	891.9	891.4	890.9	890.3	889.7	889	888.2	886.5	884.5	882.2
20	868.1	868.1	868	867.9	867.6	867.3	866.9	866.5	866	865.4	864.7	864	862.3	860.4	858.2
30	796.2	796.2	796.2	796.1	795.9	795.6	795.3	794.9	794.5	794	793.4	792.7	791.3	789.5	787.5
45	636.9	636.9	636.9	636.8	636.6	636.4	636.1	635.8	635.4	635	634.5	634	632.7	631.2	629.5
60	430.3	430.3	430.2	430.1	430	429.8	429.6	429.3	429	428.6	428.2	427.8	426.8	425.7	424.4
75	199.8	199.7	199.6	199.5	199.4	199.2	199	198.7	198.4	198.1	197.8	197.4	196.7	195.8	195
90	4.69	4.68	4.68	4.67	4.66	4.65	4.62	4.58	4.54	4.50	4.47	4.43	4.35	4.28	4.20

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-180 30W 4000K 120D

表--3

光 强 分 布 数 据 表 格

单位: cd

H (DEG) V (DEG)	7	8	9	10	15	20	30	45	60	75	90				
-90	2.47	2.47	2.47	2.47	2.47	2.47	2.48	2.57	2.65	2.63					
-75	154.2	153.4	152.4	151.5	145.5	137.9	118.5	84.22	41.23	8.21					
-60	383.2	381.9	380.3	378.6	367.9	353.7	316.2	241.8	146.6	44.80					
-45	593.6	591.7	589.6	587.3	572.1	551.5	499	387.5	245.7	90.21					
-30	761.4	759.2	756.6	753.7	735	711.8	646.4	504.7	324.9	127.3					
-20	841.3	838.9	836.3	833.2	815.2	790.1	717.5	561.2	363.1	145.3					
-15	870.7	868.4	865.7	863.1	845.1	818.9	743.8	581.9	376.9	151.9					
-10	893.8	891.9	889.5	886.8	867.9	840.8	763.5	597.4	387.1	156.7					
-9	897.7	895.8	893.5	890.7	871.6	844.3	766.7	599.8	388.7	157.5					
-8	901.4	899.4	897.1	894.3	875.2	847.6	769.6	602	390.2	158.1					
-7	904.9	902.8	900.4	897.6	878.3	850.6	772.1	603.9	391.5	158.7					
-6	908.2	906	903.5	900.6	881.2	853.2	774.4	605.6	392.7	159.3					
-5	911.2	909	906.4	903.5	883.7	855.6	776.4	607.2	393.7	159.7					
-4	914	911.8	909.1	906.1	886	857.6	778.1	608.5	394.5	160.1					
-3	916.5	914.3	911.5	908.4	888	859.4	779.5	609.5	395.2	160.5					
-2.5	917.7	915.5	912.7	909.5	888.8	860.1	780.1	610	395.5	160.6					
-2	918.9	916.6	913.7	910.5	889.6	860.8	780.7	610.4	395.8	160.7					
-1.5	920	917.6	914.7	911.4	890.4	861.4	781.1	610.7	396	160.8					
-1	921	918.5	915.6	912.2	891	862	781.5	611	396.1	160.9					
-0.5	922	919.3	916.4	912.9	891.5	862.4	781.8	611.2	396.3	160.9					
0	922.9	920.1	917.1	913.6	892	862.8	782.1	611.4	396.4	161	2.61				
0.5	920.4	918	915.2	911.9	891	862.1	781.8	611.3	396.4	161					
1	917.8	915.7	913.2	910.2	889.9	861.4	781.4	611.1	396.3	161					
1.5	915.2	913.5	911.2	908.4	888.7	860.6	781	611	396.3	161					
2	912.6	911.2	909.1	906.5	887.5	859.7	780.5	610.7	396.1	160.9					
2.5	910	908.9	907	904.6	886.2	858.7	779.9	610.4	396	160.9					
3	907.5	906.5	904.9	902.7	884.8	857.7	779.2	610	395.8	160.8					
4	902.5	901.9	900.6	898.7	881.9	855.4	777.7	609.1	395.3	160.6					
5	902	898.7	896.2	894.6	878.8	852.9	775.9	608	394.6	160.3					
6	901.4	898.1	894.7	890.9	875.4	850	773.8	606.6	393.8	159.9					
7	900.4	897.1	893.6	889.9	871.9	847	771.5	605	392.9	159.5					
8	899	895.8	892.3	888.5	868.1	843.7	769	603.2	391.7	159					
9	897.3	894.1	890.6	886.9	864.3	840.2	766.1	601.2	390.5	158.4					
10	895.2	892.1	888.7	885	862.3	836.4	762.9	598.9	389	157.8					
15	879.7	876.9	873.6	869.9	847.6	818.5	743.6	584.6	379.7	153.5					
20	855.8	853.1	850.1	846.8	825.3	796.5	718.7	565	366.8	147.5					
30	785.3	782.8	780	776.9	758	731.1	658.6	511.5	330.7	130.6					
45	627.6	625.5	623.1	620.6	605	583.9	524.5	402	254.2	94.79					
60	423	421.4	419.7	417.8	406.2	391.2	349.7	262.3	157.6	50.30					
75	194	193	191.9	190.7	183.7	175	152.1	106.4	53.52	10.18					
90	4.13	4.05	3.98	3.91	3.53	3.16	2.41	1.80	1.20	1.90					

H(β)角度范围:-90度 - 90度
H(β)角度间隔: 0.5度
测试速度: 快速
环境温度:25.3℃
测试人员:XGZ
测试日期:2024-03-15

V(B)角度范围:-90度 - 90度
V(B)角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.293
环境湿度:65.0%
测试距离:6.350米 [K=1.0000]
备注: 118007-180 30W 4000K 120D